Microsoft® MS-DOS®

User's Guide

VERSION 5.0

for the MS-DOS® Operating System

Microsoft Corporation

lindas • Thu May 17 11:51:48 1990 • MICROSOFT CONFIDENTIAL

Information in this document is subject to change without notice and does not represent a commitment on the part of Microsoft Corporation. The software described in this document is furnished under a license agreement or nondisclosure agreement. The software may be used or copied only in accordance with the terms of the agreement. It is against the law to copy the software on any medium except as specifically allowed in the license or nondisclosure agreement. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, for any purpose without the express written permission of Microsoft.

U.S. Government Restricted Rights

The SOFTWARE and Documentation are provided with RESTRICTED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c) (1) (ii) of The Rights in Technical Data and Computer Software clause at 252.227-7013 or paragraphs (c) (1) and (2) of Commerical Computer Documentation — Restricted Rights at 48 CFR 52.227-19, as applicable. Contractor/Manufacturer is Microsoft Corporation/One Microsoft Way/Redmond, Washington 98052-6399.

©Copyright Microsoft Corporation, 1990. All rights reserved.
Simultaneously published in the U.S. and Canada.

Printed and bound in the United States of America.

Microsoft, MS, MS-DOS, GW-BASIC, QuickC, CodeView, and XENIX are registered trademarks, and Windows and Windows/386 are trademarks, of Microsoft Corporation.

Aldus is a registered trademark of Aldus Corporation.

Apple and LaserWriter are registered trademarks of Apple Computer, Inc.

COMPAQ is a registered trademark of Compaq Computer Corporation.

Epson is a registered trademark of Epson America, Inc.

IBM, AT, and Quietwriter are registered trademarks, and PC/XT is a trademark, of International Business Machines Corporation.

Intel is a registered trademark, and 386 is a trademark, of Intel Corporation.

Lotus and 1-2-3 are registered trademarks of Lotus Development Corporation.

Paintbrush is a registered trademark of Zsoft Corporation.

Tandy is a registered trademark of Tandy Corporation.

WordPerfect is a registered trademark of WordPerfect Corporation.

WordStar is a registered trademark of MicroPro International Corporation.

Document No. xxxx
Part No. yyyy
10 9 8 7 6 5 4 3 2 1

Microsoft® MS-DOS®

User's Guide

VERSION 5.0

for the MS-DOS® Operating System

Microsoft Corporation

lindas • Thu May 17 11:51:48 1990 • MICROSOFT CONFIDENTIAL

Information in this document is subject to change without notice and does not represent a commitment on the part of Microsoft Corporation. The software described in this document is furnished under a license agreement or nondisclosure agreement. The software may be used or copied only in accordance with the terms of the agreement. It is against the law to copy the software on any medium except as specifically allowed in the license or nondisclosure agreement. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, for any purpose without the express written permission of Microsoft.

U.S. Government Restricted Rights

The SOFTWARE and Documentation are provided with RESTRICTED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c) (1) (ii) of The Rights in Technical Data and Computer Software clause at 252.227-7013 or paragraphs (c) (1) and (2) of Commerical Computer Documentation — Restricted Rights at 48 CFR 52.227-19, as applicable. Contractor/Manufacturer is Microsoft Corporation/One Microsoft Way/Redmond, Washington 98052-6399.

©Copyright Microsoft Corporation, 1990. All rights reserved.
Simultaneously published in the U.S. and Canada.

Printed and bound in the United States of America.

Microsoft, MS, MS-DOS, GW-BASIC, QuickC, CodeView, and XENIX are registered trademarks, and Windows and Windows/386 are trademarks, of Microsoft Corporation.

Aldus is a registered trademark of Aldus Corporation.

Apple and LaserWriter are registered trademarks of Apple Computer, Inc.

COMPAQ is a registered trademark of Compaq Computer Corporation.

Epson is a registered trademark of Epson America, Inc.

IBM, AT, and Quietwriter are registered trademarks, and PC/XT is a trademark, of International Business Machines Corporation.

Intel is a registered trademark, and 386 is a trademark, of Intel Corporation.

Lotus and 1-2-3 are registered trademarks of Lotus Development Corporation.

Paintbrush is a registered trademark of Zsoft Corporation.

Tandy is a registered trademark of Tandy Corporation.

WordPerfect is a registered trademark of WordPerfect Corporation.

WordStar is a registered trademark of MicroPro International Corporation.

Document No. xxxx
Part No. yyyy
10 9 8 7 6 5 4 3 2 1

Table of Contents

About Your MS-DOS 5.0 Documentation xv

What's Included in This Guide? xv

Conventions xvi

Visual Cues xvi

Keyboard Formats xvii

Command Terminology xvii

PART 1 MS-DOS Fundamentals

Chapter 1 Getting Started 3

If You Have a Previous Version of DOS 3

What You Need to Upgrade to MS-DOS 5.0 3

Upgrading MS-DOS 5.0 4

If Something Goes Wrong With a Hard-Disk Upgrade 5

Recovering Your Original System After a Successful Upgrade 5

If You're Installing MS-DOS for the First Time 6

What You Need to Use MS-DOS 6

Installing MS-DOS 5.0 7

Creating a Backup Copy of MS-DOS 8

If You Have Problems Running an Application 8

New Features of MS-DOS 5.0 8

Chapter 2 MS-DOS and Your System 11

Your System Hardware 11

The Keyboard 13

Disk Drives 14

Main Memory 18

Devices 19

What Is MS-DOS? 19

Using Programs with MS-DOS 19

niklasb • Wed May 16 19:40:14 1990 • MICROSOFT CONFIDENTIAL

Organizing Information with MS-DOS 20
Files 20
Directories 21
Disks 22
The Command Line and the Shell 22
The MS-DOS Command Line 24
The Shell 25
Switching Between the Shell and the Command Line 25

Chapter 3 Command Line Basics 27

Parts of a Command 27
The Command Name 28
Parameters 28
Switches 30
Typing In Commands 31
Shortcuts to Typing In Commands 31
How MS-DOS Responds to Commands 33
Pausing or Canceling a Command 34
Telling MS-DOS Which Disk Drive to Use 34
Internal and External Commands 35

Chapter 4 Shell Basics 37

Starting the Shell 37
Understanding the Shell and Its Screens 38
Shell Screen Elements 40
Text Mode and Graphics Mode 41
Using the Keyboard with the Shell 43
Working with the Shell 44
Working with Menus 44
Working with Dialog Boxes 47
Using Program Manager 50
Understanding the Program Manager Screen 50
Running Programs 51
Working with Groups of Programs 51
Working with Programs 52
Moving from Program Manager to File Manager 53

lindas • Thu May 17 12:05:03 1990 • MICROSOFT CONFIDENTIAL

Using File Manager 53
Understanding the File Manager Screen 53
Selecting a Disk Drive 56
Selecting a Directory 57
Selecting Files 57
Running a Program from File Manager 61
Using the File Manager Menus 62
Moving from File Manager to Program Manager 64
Getting Help 64
Leaving the Shell 67
Customizing the Look of the Shell 68
Changing Colors 68
Changing Screen Modes 69

PART 2 Working with MS-DOS

Chapter 5 Working with Files 73

Types of Files 73
Program Files 73
Specialized Data files 74
Unformatted Text Files 74
Formatted Text Files 74
Batch Files 74
Filenames 75
Names 75
Extensions 76
File Size and Time of Creation 77
Using MS-DOS Wildcards 77
Using Wildcards to Specify Groups of Files 78
Using Wildcards to Match Files 80
Displaying Text Files 80
Copying Files 81
Copying Single Files 82
Copying a Group of Files with Wildcards 83
Renaming as You Copy 84
Combining Files with the Copy Command 84

niklasb • Wed May 16 19:40:14 1990 • MICROSOFT CONFIDENTIAL

Copying from the Keyboard and to the Printer 85
Copying Files with the Shell 86
Renaming Files 86
Printing Text Files 87
Printing Files 88
Using the Print Queue 89
Deleting Files 89
Deleting Single Files 90
Deleting Groups of Files 90
Clearing a Directory 91
Deleting Files with the Shell 91
Moving Files 91
Comparing Files 92
Viewing and Changing File Attributes 93
Viewing File Attributes 94
Changing a File Attribute 94
Finding Text Within a File 96
Using the Shell to Search for Files 98
Using the Shell to Get Information About a File 99
Using the Shell to Associate a File with a Program 101

Chapter 6 Working with Directories 103

Understanding Directories 103
The Directory Tree 103
Directory Names 106
Paths and Pathnames 106
The Current Drive 108
The Current Directory 108
Using the Prompt Command to See the Current Directory 109
Viewing Directories 110
Displaying Whole Directories 111
Displaying Groups of Files 112
Arranging the Display of a Directory 112
Sorting a Directory Listing 113
Viewing All Directories on a Disk 114
Viewing Directories in the Shell 115
Using the File Manager Directory Tree 116

lindas • Thu May 17 12:05:03 1990 • MICROSOFT CONFIDENTIAL

Rearranging the Shell Display 122
Modifying File Lists 125
Creating Directories 126
Moving Between Directories 128
Finding Out Which Directory Is Current 128
Changing Directories 129
Deleting Directories 130
Copying Directories 132
Copying All Files in a Directory 132
Creating Directories as You Copy 133
Copying Subdirectories 134
Renaming Directories 134
Updating Directories 136
Replacing Outdated Files 136
Adding New Files 136
Telling MS-DOS Where to Look for Files 137
Using the Path Command 137
Using the Append Command 138

Chapter 7 Managing Disks 141

Types of Disks 141
Bytes, Kilobytes, and Megabytes 143
Kinds of Disk Drives 143
Formatting Disks 144
Formatting a Single Disk 145
Formatting Different Disk Types 147
Creating System Disks 148
Unformatting a Hard Disk 149
Using the Shell to Format Floppy Disks 150
Labeling Disks 150
Assigning and Deleting Labels 151
Viewing Labels 152
Making Backup Disks 152
Backing Up Single Directories 153
Backing Up a Directory and its Subdirectories 154
Backing Up Selected Files 154
Adding Files to a Backup Disk 155

lindas • Thu May 17 12:05:03 1990 • MICROSOFT CONFIDENTIAL

Using the Shell to Make Backup Disks 156
Restoring Directories and Files 156
Restoring Files to a Directory 157
Restoring Selected Files 158
Using the Shell to Restore Files 159
Verifying All Save Operations 159
Recovering Files from Bad Disks 160
Recovering Files 160
Recovering Disks and Directories 161
Giving a Drive Letter to a Directory 161
Partitioning Your Hard Disk 162
Using Fdisk from the MS-DOS Command Prompt 163
Using Fdisk from the Install Program 163
Understanding Hard Disk Partitions 164
Using Fdisk 170
Displaying Partition Data 172
Creating a Primary MS-DOS Partition 173
Creating an Extended MS-DOS Partition 174
Creating Logical Drives in the Extended MS-DOS Partition 175
How Drive Letters Are Assigned 176
Setting the Active Partition 179
Deleting an MS-DOS Partition or Logical Drive 179
Working with Additional Hard Disks 180
Formatting Your Hard Disk After Using Fdisk 181
Changing to Non-DOS Partitions 182

Chapter 8 Advanced Command Techniques 183

Redirecting Command Output and Input 183
Redirecting the Output of a Command 184
Redirecting the Input to a Command 185
Passing Information Through Filter Commands 185
Controlling the Screen Display with the More Command 185
Searching for Text with the Find Command 186
Sorting Text Files 186
Combining Commands with Redirection Characters 187

lindas • Thu May 17 12:05:03 1990 • MICROSOFT CONFIDENTIAL

Using Command Editing Keys 188
Redisplaying and Reentering a Command 190
Fixing a Misspelled Command 192
Editing a Command 192
Using Doskey to Work with Commands 197
Installing Doskey 198
Typing More than One Command On a Single Line 199
Displaying Previous Commands 199
Editing and Reusing Previous Commands 202
Saving and Clearing the List of Stored Commands 203
Using Doskey to Create Macros 204
Creating Macros 205
Running Macros 205
Displaying Macros 206
Editing Macros 206
Saving Macros 207
Deleting Macros 207
Using Replaceable Parameters 208
Redirecting Input and Output 209

Chapter 9 The Shell Program Manager 211

Working with Groups 211
Adding a Group 214
Changing a Group 216
Deleting a Group 217
Reordering a Group List 219
Working with Programs 219
Adding a Program to a Group 219
Changing a Program 222
Removing a Program from a Group 223
Copying a Program 224
Creating Startup Commands for Your Programs 225
Using the Startup Directory Box 226
Running Batch Files in a Startup Command 227
Using Parameters 227

niklasb • Wed May 16 19:40 • MICROSOFT CONFIDENTIAL

Chapter 10 Working with the MS-DOS Editor 231

Getting Started with Edit 231
Working with Menus 233
Working with Dialog Boxes 234
Getting Help 236
Exiting Edit 238
Creating a Text File 238
Moving the Cursor 238
Selecting Text 239
Editing Text 240
Moving Text 240
Copying Text 241
Clearing Text 242
Finding Text 242
Replacing Text 243
Managing Files 244
Creating a New File 244
Opening a File 244
Saving a File 245
Printing a File 246
Customizing Edit 246
Controlling the Screen Display 246
Specifying the Help Path 247

PART 3 Customizing MS-DOS

Chapter 11 Working with Batch Files 251

Understanding Batch Files 251
Batch File Commands 252
Tools for Creating Batch Files 253
Naming Batch Files 253
Running Batch Files 253
Stopping Batch Files 254
Debugging Batch Files 254
Undoing What You Have Done 254
The AUTOEXEC Batch File 255

niklasb • Wed May 16 19:40:14 1990 • MICROSOFT CONFIDENTIAL

Creating Small Batch Files 255
Displaying Messages with the Echo Command 256
Pausing a Batch File 257
Including Remarks in a Batch File 258
Starting Batch Files Inside Batch Files 259
Using Replaceable Parameters 260
Controlling When Commands Run 261
Using Goto 261
Using If Commands 262
Using If and Goto Together 263
Creating a Batch File Menu System 264
Making a Menu Item with Pause 266
Making a Menu Item with Replaceable Parameters 266
Making a Menu Option with If and Goto 268
Exiting from the Menu System 270

Chapter 12 Customizing Your System 271

Creating a Startup Procedure 272
Startup Commands 272
Sample Startup Procedures 273
Configuring MS-DOS for Your System 275
An Overview of the Configuration Commands 275
Installing Device Drivers 276
Increasing the File Transfer Area 277
Increasing the Number of Files You Can Have Open 277
Increasing CTRL+C Checking 278
Increasing the Number of Logical Drives 279
Sample Configuration Files 279
Configuring Your Ports 280
Configuring Your Printer 281
Configuring a Serial Port 282
Adding Disk Drives 283
Installing the Driver 284
Assigning Two Drive Letters to a Single Drive 286
Redefining Drive A or B 286

niklasb • Wed May 16 19:40:14 1990 • MICROSOFT CONFIDENTIAL

Controlling Your Monitor and Keyboard 287
Understanding ANSI Commands 288
Understanding ASCII Codes 288
Running ANSI Commands 289
Changing the Character and Key Displays 291
Assigning Commands to a Key 292
Moving the Cursor 293
Changing the Attributes of the Text 296

Chapter 13 Optimizing Your System 301

What Is Optimizing? 301
What Are System Resources? 302
Understanding Memory 302
Understanding Disk Space 304
Improving Your System's Speed 305
Using the Buffers Command 307
Using Fastopen 308
Using SMARTDrive 309
Using RAMDrive 314
Using the HIMEM Extended Memory Manager 318
Installing the EMM386 Expanded Memory Emulator 319
Improving the Efficiency of Your Hard Disk 321
Freeing Up Memory 330
Freeing Up Conventional Memory 330
Freeing Up Extended Memory 334
Freeing Up Expanded Memory 335

Chapter 14 Customizing for International Use 337

Understanding Languages 337
Changing Conventions and Keyboards 340
Changing Date and Time Formats With the Country Command 340
Changing Keyboards with the Keyb Command 342
Using Code Pages 345
Preparing Your Console for Code Pages 346
Preparing Your Printer for Code Pages 348
Preparing MS-DOS for Code Pages 350

niklasb • Wed May 16 19:40:14 1990 • MICROSOFT CONFIDENTIAL

Loading Code Pages 350
Changing Code Pages 352
Displaying Code Page Information 353
Sample Language Changes 354
Changing Languages Without Changing Code Pages 355
Using One Prepared Code Page 355
Using Two Prepared Code Pages with Your Console 356
Using Prepared Code Pages with Your Printer 357

niklasb • Wed May 16 19:40:14 1990 • MICROSOFT CONFIDENTIAL

niklasb • Wed May 16 19:40:14 1990 • MICROSOFT CONFIDENTIAL

About Your MS-DOS 5.0 Documentation

The MS-DOS® 5.0 documentation setconsists of this *User's Guide*, the *MS-DOS 5.0 User's Reference*, and online Help for MS-DOS and MS-DOS Shell commands.

The *MS-DOS 5.0 User's Guide* describes how you can work with MS-DOS. It includes information for user's who have little experience with computer systems, as well as advanced topics for those who are familiar with MS-DOS.

The *MS-DOS 5.0 User's Reference* contains complete descriptions of all commands and installable device drivers. These descriptions give intermediate and advanced users information about the full capabilities of MS-DOS. This book also contains a guide to MS-DOS messages.

Online Help with MS-DOS commands is a new feature of MS-DOS 5.0. You can get a quick summary of MS-DOS command syntax and options by typing a few characters on your keyboard. Online help with MS-DOS Shell commands also provides easy access to information about Shell procedures and commands.

What's Included in This Guide?

The *MS-DOS 5.0 User's Guide* provides an introduction to using the features of MS-DOS 5.0. Some features you'll use daily; others you'll use infrequently, if at all. You'll find features that you're likely to use most often described early in the book. Advanced features and tasks you'll occasionally need to do are presented in later chapters.

The *MS-DOS 5.0 User's Guide* is divided into the following parts:

Part 1, MS-DOS Fundamentals. Chapters in this part explain the essentials of a computer system and MS-DOS. They also explain how to use the MS-DOS command line and Shell.

Part 2, Working with MS-DOS. Chapters in this part describe the procedures for working with files, directories, and disks. It also explains advanced techniques for

niklasb • Wed May 16 19:40:14 1990 • MICROSOFT CONFIDENTIAL

using MS-DOS commands, tells you how to use the MS-DOS Shell Program Manager, and describes procedures for using the new MS-DOS full-screen editor.

Procedures in this part are briefly summarized at the beginning of each section to allow you to quickly review steps needed to accomplish a task. If you're using the MS-DOS Shell, you'll find Shell procedures, when they are relevant, at the end of sections.

Part 3, Customizing MS-DOS. Chapters in this part provide information for advanced users on using batch files, customizing your computer system, and using MS-DOS internationally.

Appendix. The appendix contains information about keyboard configurations for various countries.

Conventions

To help you locate and identify information easily, the *MS-DOS 5.0 User's Guide* uses visual cues, standard text formats, and special terms. These conventions are explained in the following sections.

Visual Cues

You'll find the following typographical conventions throughout the guide:

Type style	Used for
bold	Command names, switches, and any text you must type exactly as it appears.
italic	Parameters. You must supply the text for any item shown in italic. For example, if you want to use a parameter that calls for a *filename*, you must type the name of the specific file. Italic type also indicates a new term. The term is always explained when it first occurs.
ALL CAPITALS	Directory names, filenames, and acronyms.
SMALL CAPITALS	The names of keys on your keyboard. For example, CTRL or ENTER.
`MONOSPACE`	Examples of commands and command output.

niklasb • Wed May 16 19:37:56 1990 • MICROSOFT CONFIDENTIAL

Type style	Used for
Initial Capitals	Program names, menu items, and dialog-box names and options. For example, Doskey, Copy menu, or Confirm on Delete option.

Symbol	Used for
▶	Indicates the beginning of a procedure.
***Shell*▶**	In chapters not devoted exclusively to the MS-DOS Shell, indicates the beginning of a Shell procedure.
■	Indicates that a procedure has only one step.
Mouse	Instructions for mouse users.
Keyboard	Instructions for keyboard users.

Keyboard Formats

Key combinations appear as follows:

```
KEY1 + KEY2
```

A plus sign (+) between key names means to hold down the first key while you press the second key. For example, Press CTRL+C means to hold down the CTRL key and press the C key. Then release both keys.

Command Terminology

The *MS-DOS 5.0 User's Guide* uses the following terms to describe commands and their use:

Term	Meaning
Application	A computer program used for a particular task, such as word processing.
Choose	To use a mouse or key combination to pick an item that begins an action in Edit or the MS-DOS Shell. (Contrast with *select*.)
Click	To quickly press and release the mouse button.

t-mark • Thu May 17 10:13:20 1990 • MICROSOFT CONFIDENTIAL

ARROW keys	The four arrow keys on your keyboard. Each arrow key is named for the direction the key points: UP ARROW, DOWN ARROW, RIGHT ARROW, and LEFT ARROW.
Double-click	To click the mouse button twice in rapid succession.
Drive	The name of a hard disk drive or floppy disk drive. You need to specify a drive name only if you are using a file that is *not* on the default drive. You never need to specify a drive name for an internal command.
Enter	To type a command or text and press the ENTER key.
Filename	The name of a file, including any filename extension.
Menu	A list of items in Edit or the MS-DOS Shell. Most menu items are commands.
Parameter	Provides more information to a MS-DOS command, such as the location of a file, the destination of a command action, or specific values you want the command to use.
Path	The name of the directory and any subdirectories.
Pathname	Refers to *drive*, *path*, and *filename*. *Pathname* is used in cases where you're required to specify the location of a file, which might be anywhere on the system.
Select	To mark an item by highlighting it with key combinations or by clicking it with a mouse. Selecting does not initiate an action. After selecting an item, you choose the action you want to affect the item. For example, you might select a filename and then choose the Copy command to copy the file to another directory. (Contrast with *choose*.)
Switch	An optional control for a command. For example, the **/r** switch in the **sort** command causes the command to sort backwards (from Z to A). All switches begin with a slash (/).

niklasb • Wed May 16 19:37:56 1990 • MICROSOFT CONFIDENTIAL

Part 1
MS-DOS Fundamentals

Beta Release

Beta Release

Chapter 1

Getting Started

Getting started with MS-DOS 5.0 is easy and straightforward. If you have a previous version of DOS, just follow the instructions described below for upgrading to MS-DOS 5.0. If you are installing DOS for the first time, read the procedure for first-time installations.

After you complete the upgrade or installation and begin using MS-DOS 5.0, you'll find it includes many improvements that make your job easier and more efficient. A description of new MS-DOS features concludes this chapter.

If You Have a Previous Version of DOS

If you have a version of DOS on your system, you can upgrade to MS-DOS 5.0 by following a few simple steps that start the upgrade procedure. A program called Install guides you through the upgrade. It evaluates your system to determine the version of DOS and type of equipment you have, asking you to verify information and make changes, if necessary. The program also offers you the choice of making a backup of your existing files before continuing with the upgrade.

If your system includes a hard disk and you have files with names identical to new MS-DOS 5.0 files, the upgrade procedure replaces the existing files with the new files. Before beginning the upgrade, be sure to backup files you want to save.

What You Need to Upgrade to MS-DOS 5.0

The minimum requirements your system needs to upgrade to MS-DOS 5.0 are:

- DOS 2.11 or higher
- At least 256K of memory
- If you're upgrading onto a hard disk, at least 2.5 MB of free disk space
- If you're upgrading onto floppy disks, see the requirements listed below.

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

If you're upgrading MS-DOS 5.0 onto floppy disks, you need to supply the following disks to complete the upgrade:

- For a 5.25-inch (360K) disk drive, you need four low-density disks which you label Startup, Support, Utility, and Shell.
- For a 5.25-inch (1.2 MB) disk drive, you need four low-density or high-density disks which you label Startup, Support. Utility, and Shell.
- For a 3.5-inch (720K) disk drive, you need two low-density disks which you label Startup and Utility.
- For a 3.5-inch (1.44 MB) disk drive, you need two low-density or high-density disks which you label Startup and Utility.

Be sure that the floppy disks you use are blank and unformatted, or that they contain information you do not want to keep. The upgrade program formats floppy disks, causing the information stored on them to be lost.

If you are upgrading onto a hard disk, you need to supply the following floppy disks:

- One floppy disk for a backup copy of your old DOS system. Label this disk the *Recovery disk.*
- If you want to back up your files, supply enough floppy disks to make backup copies. The upgrade program tells you approximately how many backup disks you'll need.
- A floppy disk set of your original DOS files. You'll need these files if both the upgrade program and the recovery program fail.

Upgrading MS-DOS 5.0

During the upgrade, you'll be asked to verify and provide information about the following:

- The manufacturer of the DOS currently installed
- The path specifying where you want the upgrade program to copy your new MS-DOS files
- Whether or not you want to install the Shell
- The video configuration of your system (e.g. CGA, VGA, or EGA)

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

▶ **To upgrade to MS-DOS 5.0**

1. Switch on your system.
2. Put the Startup disk in floppy drive A: and close the drive door.
3. Type **A:** and press **ENTER**.
4. Type **install** and press ENTER.
5. Follow the instructions on the screen.

If you have questions about any of the procedures or options, you can request on-line Help by pressing the F1 key.

NOTE Do not try to upgrade MS-DOS 5.0 by copying files directly from the upgrade disks. The files are in a special form that make them unuseable unless they are copied during the upgrade process.

If Something Goes Wrong With a Hard-Disk Upgrade

As you upgrade an existing hard disk, problems might occur that require you to recover your original DOS system. For example, there might be a problem with your system's hard disk or internal memory that does not allow the upgrade program to install the new files. Or you might have a power failure while the upgrade program is copying the new MS-DOS files. When something goes wrong during the upgrade, use the Recovery disk to continue the upgrade from the point at which the problem occurred.

If the upgrade program detects an error in your system's hard disk or memory that prevents MS-DOS 5.0 from working, the program displays a message that includes instructions for recovering DOS.

In rare cases, you might not be able to restore your original version of DOS using the Recovery disk. If this happens, repartition and format your hard disk using your original DOS. Then you can restore your entire hard disk, including the original version of DOS, from the set of backup disks you created at the beginning of the upgrade program.

Recovering Your Original System After a Successful Upgrade

After you complete your upgrade, you might find that some of your existing programs are not compatible with MS-DOS 5.0, and you need to restore your original DOS system.

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

▶ **To restore your original system after a successful upgrade:**

1. Insert the Recovery disk in drive A.
2. Switch on your system.
3. Follow the instructions on the screen.

If the recovery program fails, you need to recover your original DOS system using your backup disks.

CAUTION If you try to restore your original DOS system after you have used MS-DOS 5.0 to create files on your hard disk, you will lose the information in the new files, and you might cause other problems in your system. If you want to restore your original DOS system, it is best to do so soon after you complete the upgrade.

If You're Installing MS-DOS for the First Time

If you do not have DOS on your system, installing MS-DOS 5.0 is as easy as inserting a disk into your floppy disk drive and switching on your system. A program called Install guides you through the installation. First it evaluates your system to determine what kind of equipment you have. Then it copies MS-DOS files onto your hard disk or floppy disks, asking you to verify information and make changes when appropriate. If you'd like more information about disk drives and your system before beginning the installation, see Chapter 2, "MS-DOS and Your System."

What You Need to Use MS-DOS

The minimum requirements your system needs to use MS-DOS 5.0 are:

- One of the Intel 8086 (or higher) family of processors
- If you are installing onto floppy disks, at least 256K of memory
- If you are installing onto a hard disk, at least 512K of memory and 2.5 MB of free disk space

If you are installing MS-DOS 5.0 onto floppy disks, you need to supply the following number of disks to complete the installation:

- For a 5.25-inch (360K) disk drive, you need four low-density disks which you label Startup, Support, Utility, and Shell.

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

- For a 5.25-inch (1.2 MB) disk drive, you need four low-density or high-density disks which you label Startup, Support, Utility, and Shell.
- For a 3.5-inch (720K) disk drive, you need two low-density disks which you label Startup and Utility.
- For a 3.5-inch (1.44 MB) disk drive, you need two low-density or high-density disks which you label Startup and Utility.

Be sure that the floppy disks you use are blank and unformatted, or that they contain information you do not want to keep. The installation program formats them, causing the information stored on the disks to be lost.

Installing MS-DOS 5.0

During the installation, you'll be asked to verify and provide information about the following:

- The current time and date
- The country setting of your system
- Your keyboard and keyboard layout
- Whether you want to install MS-DOS 5.0 onto a hard disk or floppy disks
- The path that specifies where you want the MS-DOS 5.0 files to be located
- Whether or not you want to MS-DOS Shell to start automatically each time you start your system
- Whether or not to install the program that controls the Microsoft Mouse
- Whether or not to use all available disk space for MS-DOS 5.0
- The video configuration of your system (e.g. CGA, VGA, or EGA)

▶ To install MS-DOS 5.0

1. Put the Startup disk in the floppy in drive A: and close the drive door.
2. Switch on your system.
3. Follow the instructions on the screen.

If you have questions about any of the procedures or options, you can request online Help by pressing the F1 key.

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

NOTE Do not try to install MS-DOS 5.0 by copying files directly from the installation disks. The files are in a special form that makes them unusable unless they are copied during the installation process.

Creating a Backup Copy of MS-DOS

After you've upgraded to MS-DOS 5.0 or installed MS-DOS for the first time, create a backup set of floppy disks. This will enable you to reinstall MS-DOS 5.0 if something happens to your Upgrade or Install disks.

If You Have Problems Running an Application

If you run an application that displays a message indicating it is incompatible with MS-DOS 5.0, contact the manufacturer to get an updated version of the application.

If the manufacturer has not updated the application, use the **setver** command described in the *MS-DOS 5.0 User's Reference.*

New Features of MS-DOS 5.0

If you've used earlier versions of DOS, you'll find many improvements in MS-DOS 5.0. One of the most significant is the new installation program, which guides you through each step of the installation and provides help whenever you need it.

After you've installed MS-DOS 5.0, you'll find that your databases and spreadsheets can be bigger, and your editor can process more text. MS-DOS 5.0 requires less memory than early versions of DOS, allowing applications to run faster and more efficiently.

MS-DOS 5.0 includes a new Shell, an improved graphical interface that can be displayed on higher resolution screens than before. The Shell allows you to manage programs easily, to group files, and to navigate among them quickly. It also enables you to work with larger disks than before.

If you choose to use the MS-DOS command line instead of the Shell, you'll have on-line help on all MS-DOS commands at your fingertips.

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

You'll find QBASIC, an improved, easy-to-use BASIC programming environment that includes extensive on-line help. To use QBASIC, simply enter **qbasic** at the command prompt.

Using other MS-DOS 5.0 features and improvements, you can:

- Recall, edit, and run commands you've used previously. You can also define shortcuts for frequently used commands.
- Easily create and modify text files with a new full-screen editor.
- After formatting a disk, restore it to its former state.
- Sort directory listings by filename, type of file, time files were created, and file size.
- Search for files through multiple levels of directories.
- Use more than two hard-disk drives.
- Use disk partitions up to 2 GB.
- Use 2.88 MB floppy disks.

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

Chapter 2

MS-DOS and Your System

2

MS-DOS 5.0 is part of a computer system that includes *hardware* and *software*. Hardware is all the physical components of your system, including the computer, the monitor, the keyboard, and so on. Software is the information and instructions your system uses to perform the tasks you want it to do. MS-DOS is a special kind of software. It controls how the system processes instructions, how the system manages resources such as the time needed to accomplish a task, and how the pieces hardware communicate with one another.

Your System Hardware

The following illustration shows the basic hardware components of all personal computer systems. Your system may look somewhat different, but it will have the same basic parts.

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

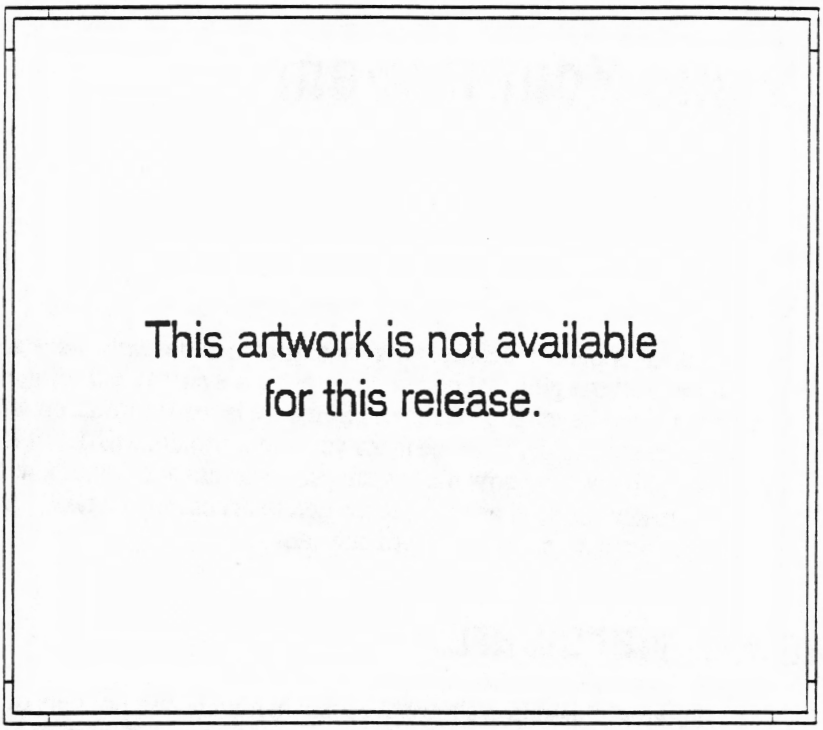

Int_1

- The computer contains the central processing unit (CPU) and main memory. The CPU processes information and instructions; the main memory stores information for short periods of time.
- Communications ports are outlets on the back of the computer. You use them to connect equipment to the system, such as a printer or a modem.
- Disk drives are located in the front of the computer. Your system uses the disk drives to store large amounts of information for long periods of time.
- You use the keyboard and the mouse enter information into the computer and to tell it to perform tasks.
- The monitor (also called a console) displays information you provide the computer and shows you what the computer does with the information.

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

The Keyboard

Your system's keyboard looks very much like a typewriter's. However, your system's has some additional keys.

The following illustrates these additional keys on a representative keyboard.

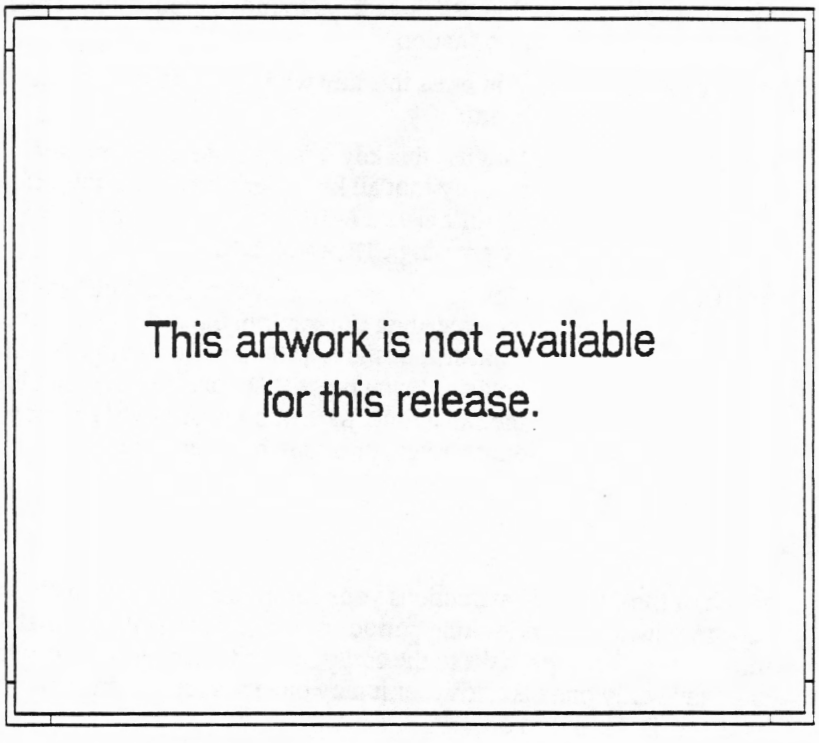

int_2

Use this key	To do this
CTRL (control)	You use CTRL with other keys to allow them to have more than one function.
ALT	Like the CTRL key, ALT enables other keys to have more than one meaning.

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

Use this key	To do this
ESC (escape)	You press ESC when you want to cancel something you've done.
DEL (delete)	You use DEL to delete (erase or remove) text.
INS (insert)	You use INS to insert text.
ARROW keys	You use these keys to move around the screen as you enter information.
NUMLOCK	You press this key when you want to use the numeric keyboard.
PAUSE	You use this key to stop what the computer is doing temporarily (not all keyboards have this key). If your system doesn't have a PAUSE key, you can pause your computer by pressing CTRL+NUMLOCK.
BREAK	You use this key to cancel what the computer is doing. In the preceding illustration, the BREAK key label is on the front side of the PAUSE key. To use the BREAK key on this keyboard, you press CTRL and the key labelled BREAK at the same time. BREAK on your keyboard may be part of another key, or it may be a separate key.

Disk Drives

Much of the data and instructions your computer uses is on magnetic disks that can store information for long periods of time. Your system's disk drives transfer information from the disks to the computer and back again as needed. Your system may have only one disk drive, or it may have several. Each is named by a single letter: A, B, C, and so on.

There are two main types of magnetic disks: floppy disks and hard disks. Each uses a different kind of disk drive.

Floppy Disks and Floppy Disk Drives

A floppy disk is a flexible, magnetized vinyl disk. Floppy disks come in two sizes; they are either 5.25 inches or 3.5 inches wide. The following illustration shows what a 5.25-inch floppy disk looks like:

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

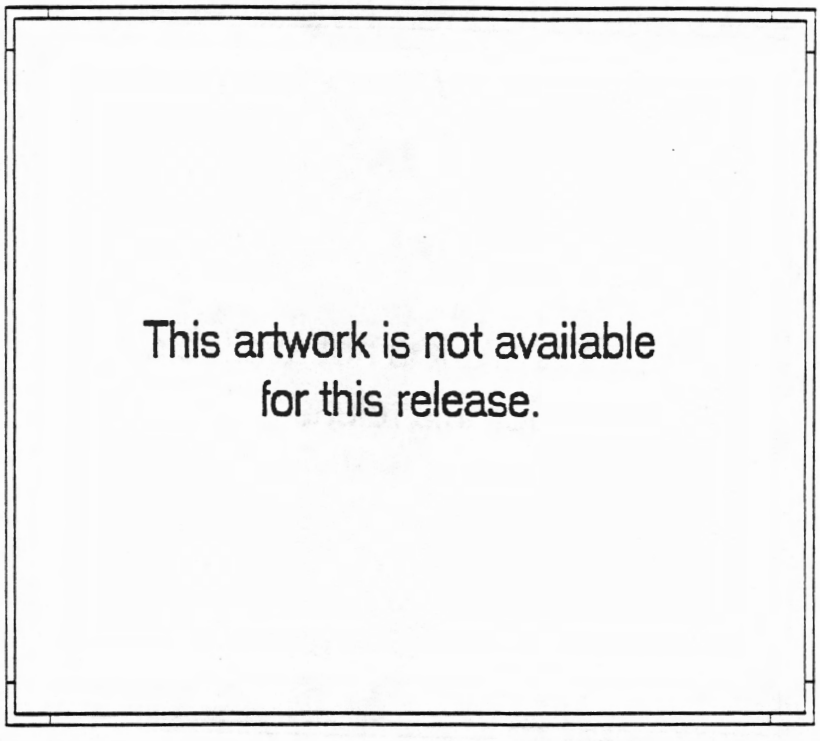

Int_3

Each disk is enclosed in its own protective cover. The front of this cover is smooth, while the back has visible seams.

Store your disks in a safe place, away from dust, moisture, magnets, and extreme temperatures. Be sure to label each disk to identify the information stored on the disk. Place labels on the front of the cover, at the top, so that the label doesn't touch the magnetic suface of the disk or cover the notch on the side. It's also a good idea to use a felt-tip pen when writing on labels–a pencil or ballpoint pen can damage the disk if you press too hard.

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

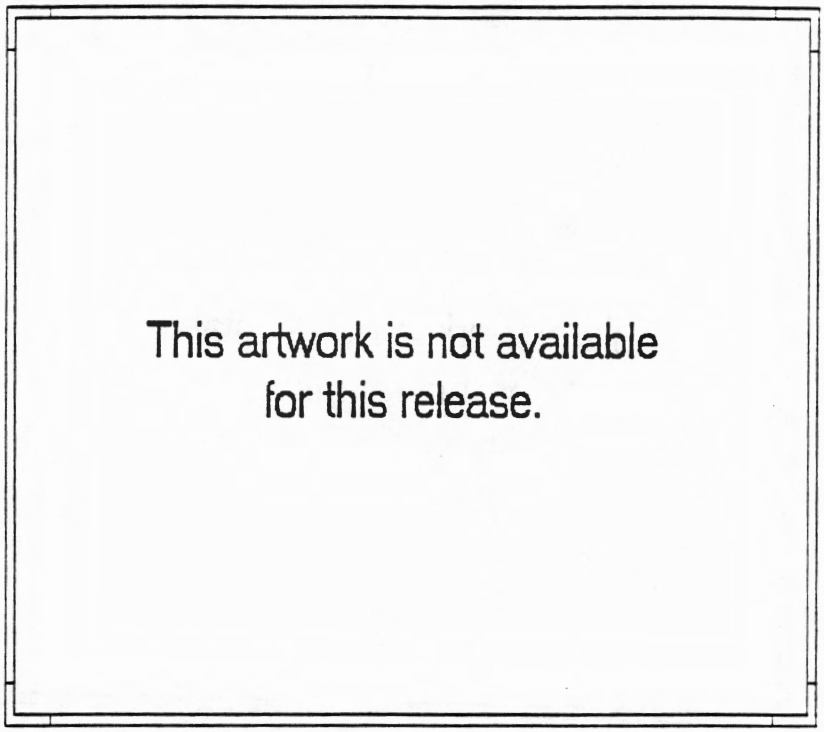

int_4

Labels help you keep track of the information on your disks. You might also need to protect the information on a disk so that it can't be changed. Some disks allow you to examine the information on them, but won't let you change the information. These are called *write-protected* disks.

The 5.25-inch disks can be write-protected in one of two ways. Some have a small piece of tape, called a *tab*, covering a notch on the right side of the disk. You can copy information onto a write-protected disk by first removing the write-protect tab. Before you do this, though, you should consider why the disk was protected, and ask yourself if you really need to change the information on it. When you finish working with a write-protected disk it's always a good idea to replace the write-protect tab.

nikiasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

If a disk does not have a write-protect notch, it is permanently write-protected. Many programs come on permanently write-protected disks that prevent the information on the disks from being destroyed accidentally.

The MS-DOS 5.0 operating system also allows you to use 3.5-inch disks, which, like 5.25-inch disks, are portable magnetic disks. Data on 3.5-inch disks is more densely packed. Depending on its capacity, a single 3.5-inch disk can store as much (or more) data as a 5.25-inch disk.

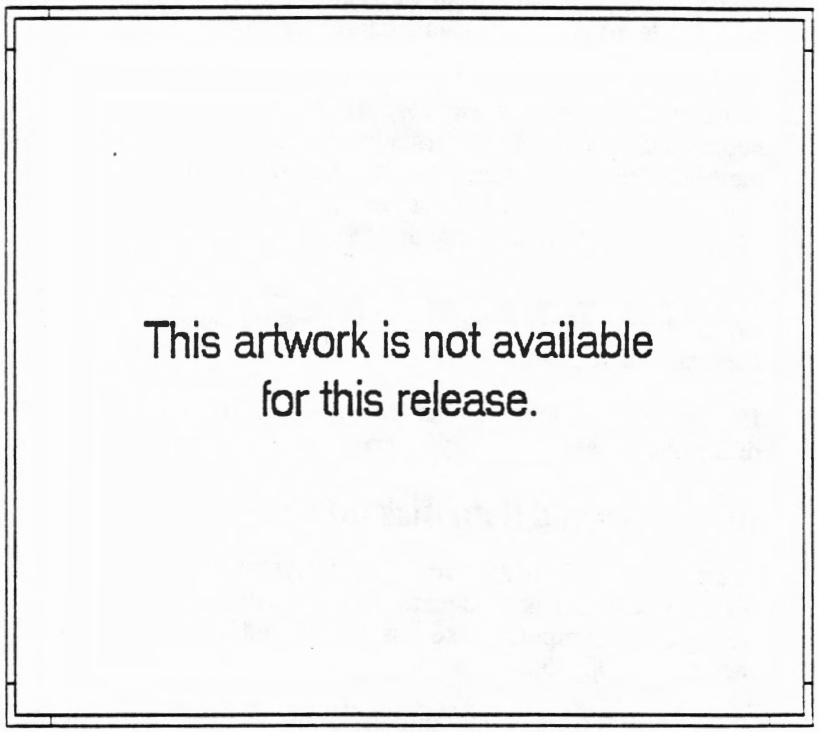

Int_5

The 3.5-inch disks have rigid plastic covers with metal shields that guard the disk from dirt and fingerprints. When you place the disk into the disk drive, the computer automatically moves this shield aside to read the disk.

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

Notice that 3.5-inch disks have a write-protect hole. This hole can be covered by sliding a built-in tab over it. When the write-protect hole is covered by the tab, the information on the disk can be changed.

Be sure to label your 3.5-inch disks and store them in a safe place. As with 5.25-inch disks, extreme temperatures, magnetism, dust, and fingerprints can harm a 3.5-inch disk.

NOTE MS-DOS works virtually the same way with 3.5-inch and 5.25-inch disks. In this guide, the term floppy disk refers to either of these two disk types.

Your system should have at least one floppy disk drive. When you want your computer to store or retrieve information on a 5.25-inch disk, you slide the disk into the floppy disk drive's narrow slot, and close the drive door (this is usually a lever, hatch, or button on the front of the disk drive). When you are through using a disk, open the drive door and slide the disk out again.

To use a 3.5-inch disk, slide the disk into the disk drive slot until you hear a click. When you are through with the disk, press the button on the front of the drive, and the disk will pop out again.

If a system has one floppy disk drive, it is usually named A. If there are two floppy disk drives, they are usually named A and B.

Hard Disks and Hard Disk Drives

In addition to floppy disk drives, some systems have a hard disk and a hard disk drive. A hard disk is a magnetic disk that can store much more information than a floppy disk. Computers take less time to find information stored on a hard disk than on a floppy disk.

A hard disk is usually built into the computer. The hard disk and the hard disk drive are a single unit, so a hard disk can't be removed like a floppy disk. A hard disk is sometimes called a *fixed disk*. A hard disk drive is usually named C.

Main Memory

While a computer can store and retrieve information on floppy and hard disks, it can only work with information that is stored in its own main memory. This memory is called Random Access Memory (RAM). When the computer needs information from a disk, it copies the information into its main memory. The information in RAM is lost when you shut your system's power off. If you want to

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

keep the information you have been working with, it is important to save it on a floppy or hard disk before you turn your computer off.

Devices

Your system has at least three devices: a keyboard, a monitor, and one or more disk drives. Other common devices include printers (for printing information from your computer), modems (for transferring information between computers), and scanners (for converting images into information a computer can use). When you add a device to your system, MS-DOS needs to know about it. To find out more about MS-DOS and devices, see Chapter 12, "Customizing Your System".

What Is MS-DOS?

The hardware introduced in the previous section exists so you can work with information. Instructions your computer needs to process information are called software because it consists of electronically coded information. Unlike hardware, which is tangible equipment, circuits, and devices, software is intangible. Unlike hardware, which you infrequently change, software easily and often changes in your system.

How can the tangible, physical hardware interact with the intangible, conceptual software? The two need something to facilitate communication between them. This is what MS-DOS does. MS-DOS allows hardware to work with software, making it possible for information to be entered, transferred, processed, displayed, and stored by the system. Software that performs these tasks is called an *operating system.*

Using Programs with MS-DOS

One of the operating-system tasks of MS-DOS is to control how and when the computer processes programs. Programs are sets of computer instructions stored on a disk. A program can perform simple jobs, such as the MS-DOS program that tells the computer the date and time. Most of the programs you'll be using are far more complex, and contain many thousands of instructions. Here are some examples of programs, and their uses:

- You can use a word processing program to create and rearrange written documents such as letters, memos, reports, and books.

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

- You can use a spreadsheet program to create a financial balance sheet. The program can also do calculations and other tasks for you.
- You can use a database management program to create, store, and retrieve hundreds of thousands of records–for example, mailing lists, customer information, and sales figures.

Complex programs like these are often called *applications*.

To use a program, you tell MS-DOS to transfer the program from the disk where it is stored into the computer's main memory. Once the program is in memory, MS-DOS hands control of the computer over to the program. The computer now follows the program's
instructions, and you can use it to write, enter data, or do any other work you need to do.

When you tell MS-DOS to transfer a program and turn the computer over to the program's control, you are *running*, or *executing*, the program. While the program is running, MS-DOS is always in the background, helping the program transfer information to and from the system's disks as needed.

Organizing Information with MS-DOS

When it is helping a program work, you don't see MS-DOS in action. What you see instead on your monitor is information and instructions from the program that's running. You work directly with MS-DOS itself when you want to use its tools for organizing information, To use these tools, you first need to understand that MS-DOS organizes information into files, directories, and disks.

Files

All information your computer uses must be contained in a file. A *file* is a collection of related information, like the contents of a file folder in a desk drawer. File folders, for instance, might contain business letters, office memos, or monthly sales data. The information in programs is also contained in files. The file allows MS-DOS to locate the information and pass it along to the computer when it's needed. As this illustration shows, many files, each with its own information, can be contained on one disk:

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

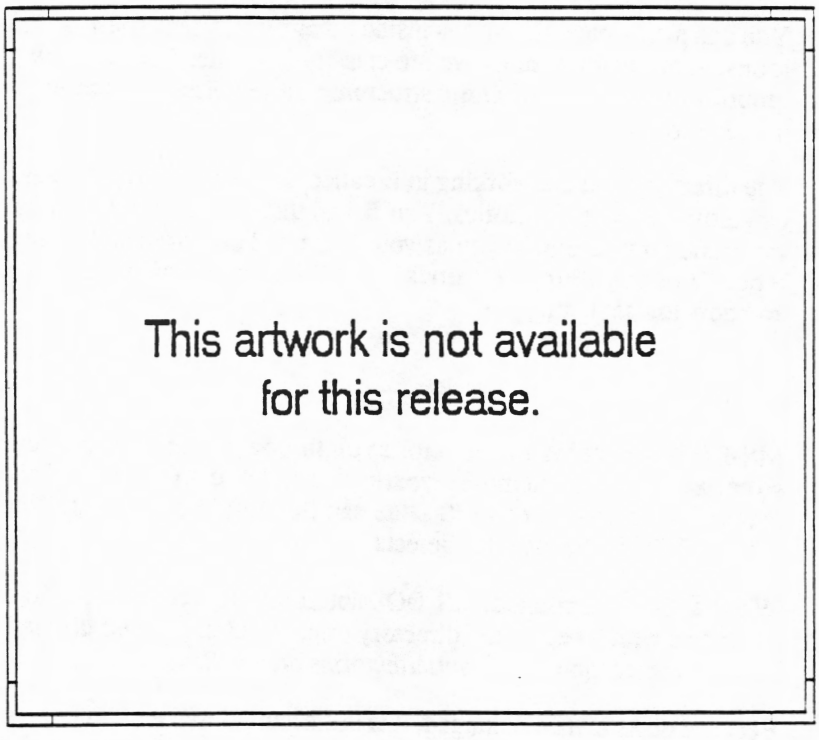

int_6

Just as each folder in a file cabinet has a label, each file on a disk has a name.

You'll find more information about files, and how to organize and arrange them using MS-DOS tools, in Chapter 5, "Working With Files".

Directories

A floppy disk can have several hundred files on it, and a hard disk can have several thousand. Since it's difficult to keep track of so many files, MS-DOS gives you a way to group files together, so they are easier to find. These groups of files are called *directories*. Each directory has a name that can identify the group of files in it.

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

You can also create directories inside other directories. These are called subdirectories. Subdirectories allow you to classify your files into as many groups and subgroups as you need. The entire structure of directories and subdirectories is called the *directory tree*.

The directory you are working in is called the *current directory*, and from it you can move to other directories. You'll find that MS-DOS directories will become more and more useful to you as you create and use more and more files. In Chapter 6, "Working With Directories", you'll find more information about directories and how to use them.

Disks

MS-DOS stores files and directories on floppy and hard disks. But before it can store information, you must prepare the disk. You do this with a special program that *formats* a disk so that MS-DOS can find information on it. When you format a disk, MS-DOS checks it for defects.

When a disk is formatted, MS-DOS automatically creates one directory on it. This directory, which begins the directory tree, is called the *root directory*. If you wish, you can create many other subdirectories on the disk.

Because disks can be damaged, it is important to make extra copies of the files you store on disks. Thes copies are called *backup* copies. Backup copies also protect you from losing information if someone inadvertantly deletes a file or group of files. For information on backing up files, see Chapter 7, Managing Disks".

The Command Line and the Shell

What you see when you start MS-DOS depends on the way it is installed. You might see this on your screen:

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

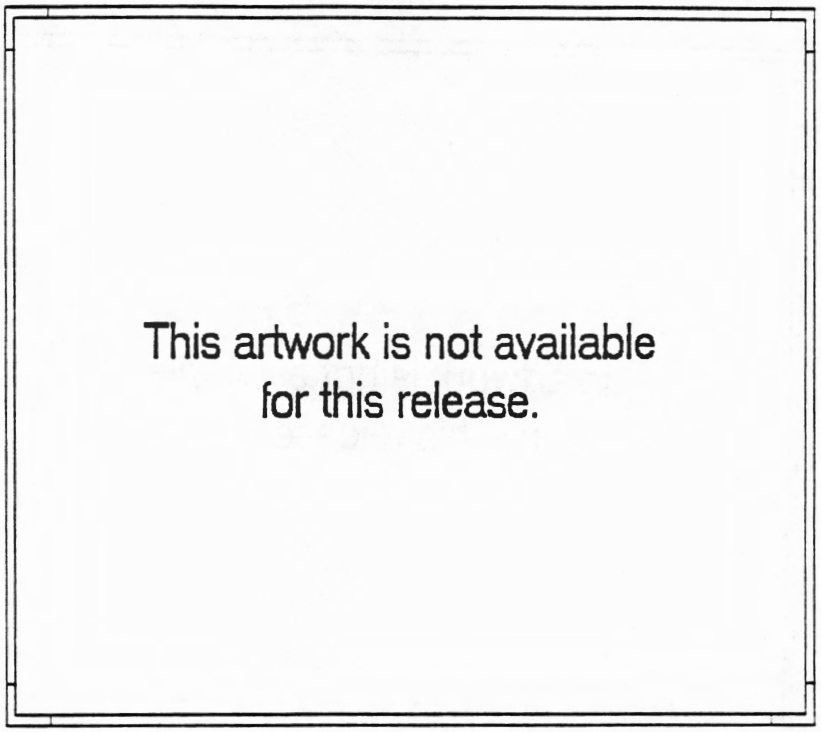

int_7

This is the MS-DOS command line. The symbol at the bottom of this monitor is called a *command prompt*. You type commands here to tell MS-DOS what to do.

Unless you tell it to do otherwise, MS-DOS automatically displays the Shell:

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

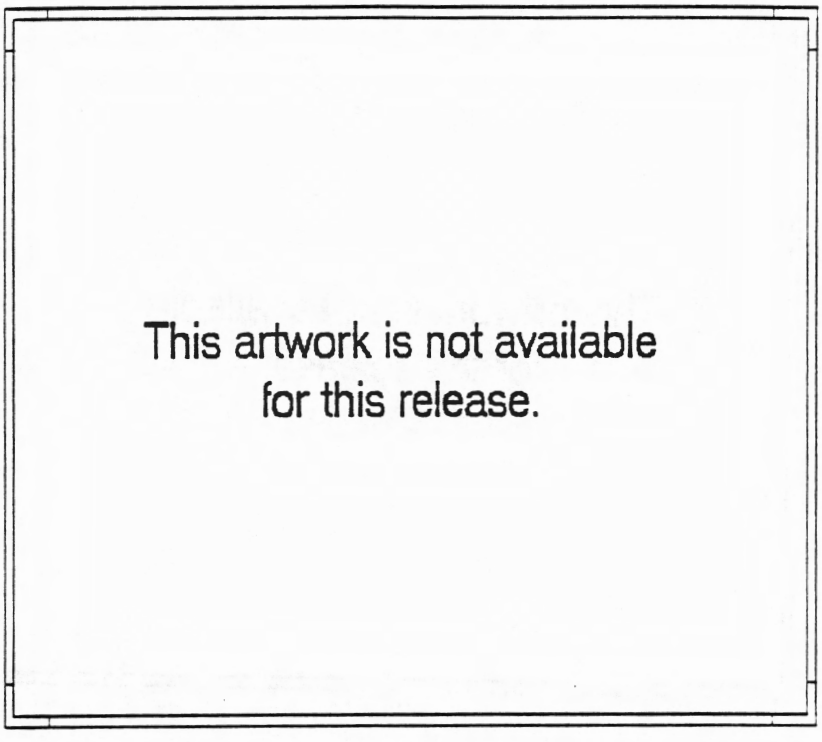

int_8

MS-DOS allows you to choose how you want to give it instructions. If you like to see things laid out for you, with all your choices displayed, you may prefer to use the Shell. If you like to tell MS-DOS what to do by typing commands, you might prefer to use the command line.

The MS-DOS Command Line

MS-DOS indicates the command line by displaying a command prompt on the screen:

```
C:\>
```

or

```
A:\>
```

or some variation, like this:

```
C:\DOS>
```

To tell MS-DOS to do something, you type a command and press ENTER. Letters of the command appear to the right of the command prompt as you key them in.

For example, to display the list of files in a directory, type the following and then press ENTER:

```
dir
```

You can use this guide and *MS-DOS 5.0 User's Reference* to help you determine the correct form of the command that you want to use. For more information about the MS-DOS command line, see Chapter 3, "Command Line Basics".

The Shell

Unlike the command line, the Shell graphically displays commands on the screen in *menus*. You use the keyboard or a mouse to select a menu and choose the command you want.

If you want to change the name of a file from FROGS.TXT to TOADS.TXT, you select FROGS.TXT in the file list and choose the **Rename** command from the File menu. A box then appears on the screen, asking you to type the new name of the file. After you do so, you press ENTER, and the file is renamed.

For more information about the Shell, see Chapter 4, "Shell Basics".

Switching Between the Shell and the Command Line

If you are using the command line and want to change to the Shell, enter:

dosshell

If you are using the Shell and want to use only the command line, press the F3 key until you return to the MS-DOS command prompt. See Chapter 12, "Customizing Your System," for information about bypassing the Shell when you start your system.

t-mark • Wed May 16 18:09:40 1990 • MICROSOFT CONFIDENTIAL

niklasb • Wed May 16 16:16:10 1990 • MICROSOFT CONFIDENTIAL

Chapter 3

Command Line Basics

3

You use the command line to tell MS-DOS what you want it to do. MS-DOS indicates the command line by displaying the command prompt. Commands typed to the right of the prompt tell MS-DOS the task to perform. For example, you can tell MS-DOS to display its software version number by doing the following:

1. Type **ver**.

   Notice that the **ver** command appears at the command prompt.

2. Press ENTER.

   MS-DOS displays its software version number.

In this guide the sequence of typing a MS-DOS command and pressing ENTER is called *entering* a command.

Each command gives MS-DOS a set of instructions. For example, when you enter the **ver** command, you instruct MS-DOS to display a message with information about its version.

A command may be a word (like **time**) or a special abbreviation (like **dir**). You don't need to worry about learning commands yet. For now, the important thing is to remember that each MS-DOS command does a particular task.

Parts of a Command

Whether a MS-DOS command performs a simple or complicated task, the command has no more than three parts. Every command has a *command name*. The command name is like a verb; it states the action that you want MS-DOS to perform. In addition to a name, some commands require a *parameter* that identifies the object you want MS-DOS to act upon. Finally, some commands include *switches*, which modify the action being performed.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

The Command Name

The command name tells MS-DOS what action you want to do (delete a file, for example). You always type the command name first. Some commands, like **cls** consist only of the command name (this command clears previous commands or other information from your screen).

Most MS-DOS commands, however, require more than a name.

Parameters

MS-DOS sometimes requires additional information that you specify in one or more parameters after the command name. A parameter defines the object you want MS-DOS to act upon. For example, the **del** command, which tells MS-DOS to delete a file, requires a parameter that names the file you want to delete. Suppose, for example, you want to delete a file named SPINACH.DOC. Here's what you enter:

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

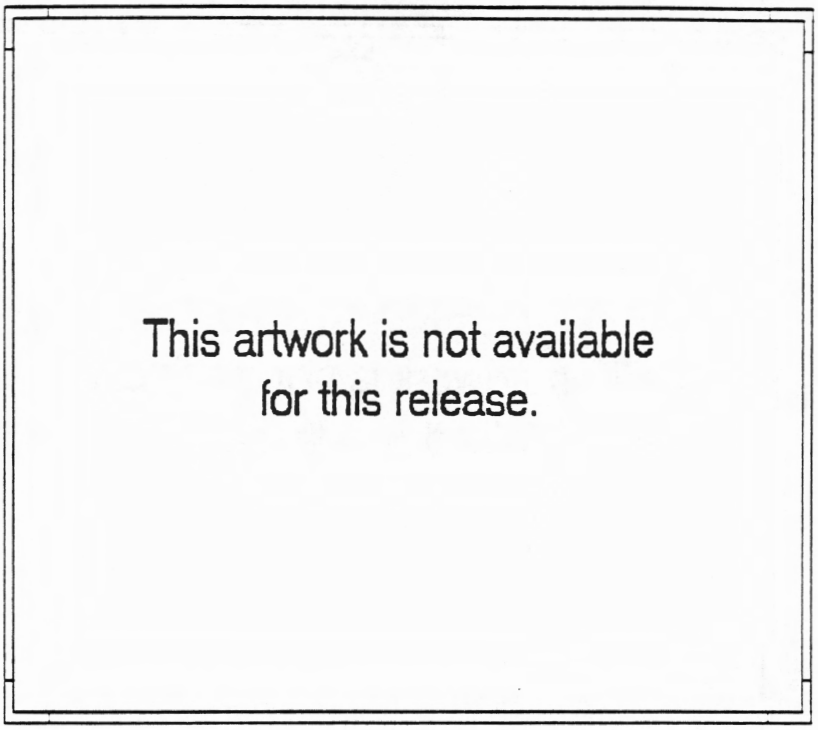

cbl_1

Some commands require more than one parameter. For example, to rename a file with the **ren** command, you must include the original name of the file you want to rename, as well as the new name.

The following command changes the name of LETTER.TXT to MEMO.TXT:

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

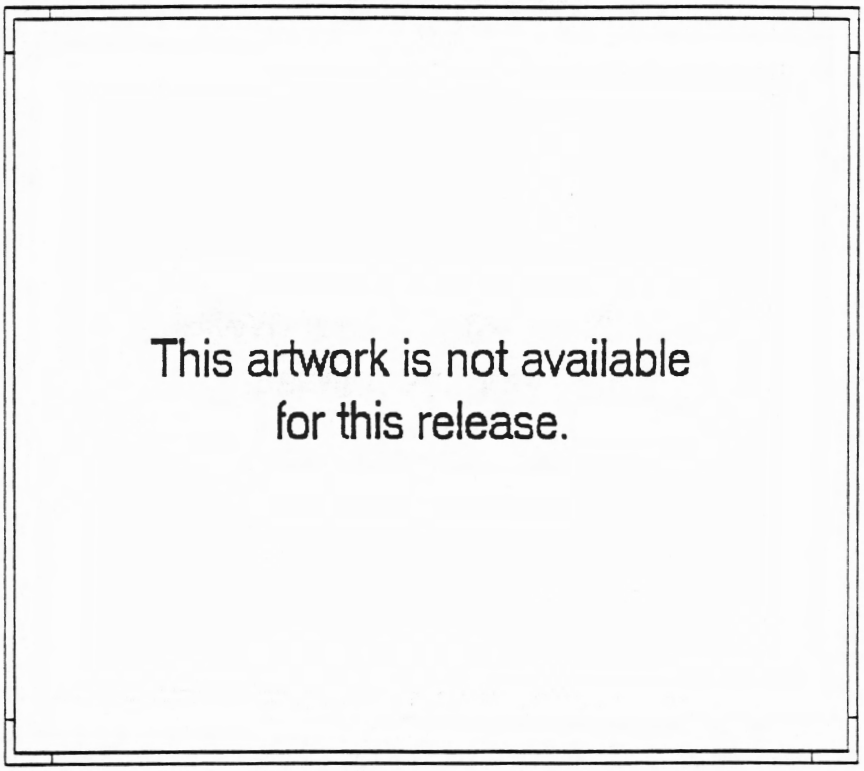

cbl_2

With some commands, you have the option of using a parameter, depending on what you want to accomplish. For example, you can use the **dir** command without a parameter to list files in the directory you are currently using. Or, you can include a parameter (a different drive, for example) to list a directory on a different drive.

Switches

A switch is a forward slash (/) followed by a single letter or number. You use switches to modify the way a command performs a task. For example, you can tell MS-DOS to verify that you want to delete a file, or display a directory in a form that may be easier to use.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Suppose you want to use the **dir** command to view a listing of a directory with a large number of files in it. When you enter the **dir** command by itself, the files of a large directory scroll by so rapidly that you can't read all the filenames. If you add a switch, **/p**, you can display files one screen at a time.

Switches vary from command to command. Some MS-DOS commands do not have any, while others have several. If a command has more than one switch, you can turn on more than one switch at a time by typing the switches one after the other, with a space between each.

You will probably not use switches very often when you first start using MS-DOS. When you have become more experienced with MS-DOS, you will find that switches can be very helpful. See Part II, "Using DOS," for more information about the switches you can use with each command.

Typing Commands

To the right of the greater than sign (>) on the command line is the *cursor*. The cursor shows you where you can key in commands. When you type a character it appears where the cursor is, and the cursor moves one space to the right. If you make a mistake when you type, press the BACKSPACE key to delete characters to the left of the cursor. Try typing characters at the command prompt, and use the BACKSPACE key to delete them.

If you want to type the command from the beginning, press the ESC key. The cursor moves to the beginning of the next line, and you can start over again. MS-DOS ignores anything that you typed before you pressed ESC.

Shortcuts to Typing Commands

MS-DOS includes editing keys that allow you to modify or repeat commands you've already typed.

To do this	Press this key
Retype one character at a time	F1 (or the RIGHT ARROW key) from the previous command
Retype all of the previous command	F3

Suppose you want to see a directory listing of the disk in drive A:

1. Be sure that there is a floppy disk in drive A, and that the drive door is closed.

t-mark • Thu May 17 12:40:41 1990 • MICROSOFT CONFIDENTIAL

2. Enter **dir a: #**

   Since there is an extra character at the end of this command, MS-DOS displays a "File not found" message. You can use the F3 key to repeat and correct the command without having to retype it.

3. Press F3.

   MS-DOS retypes the command.

4. Press BACKSPACE once to erase the #.

5. Press ENTER.

   MS-DOS displays the directory listing.

Suppose you want to retype the same command, substituting drive B for drive A. You can use the F1 key to retype the first part of the original command one character at a time, change the **a** to **b**, and use F1 again to retype the rest.

1. Press F1 four times.

   The first part of the command, **dir**, appears.

2. Type **b**

3. Press F1 once.

   The colon (:) appears.

   If your system has a B drive, press ENTER to see a directory listing. Otherwise, press ESC.

For more information about editing keys, see Chapter 8, "Advanced Command Techniques".

In addition to editing keys, MS-DOS includes a utility called Doskey that allows you to retrieve, modify, and reuse commands. To start the utility, enter the **doskey** command at the MS-DOS command prompt. The following message appears:

```
Doskey installed
```

NOTE If you see a "File not found" message when you enter the **doskey** command, see Chapter 8, "Advanced Command Techniques", for instructions about using Doskey.

Doskey remembers the commands you type, and allows you to retrieve and edit them. For example, suppose you enter these three commands.

```
del tuesday
date
time
```


niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

The first command tells MS-DOS to delete a file named TUESDAY; the second displays the current date; the third displays the current time. All these commands are stored in your system's temporary memory. You can use several methods to retrieve one of them.

The easiest method is to press the UP ARROW key. If you press the UP ARROW key once, the most recent command (**time**) appears at the command prompt. Press UP ARROW two more times to return to the first command:

```
del tuesday
```

Now you can press ENTER to enter the command again.

You can edit the command before you enter it. For example, press HOME to move the cursor back the beginning of the line, and type the **ren** (rename) command over the **del** command. Then you can press END to move the cursor to the end of the line, press the SPACEBAR, and type a new name for the file: MONDAY. The edited command looks like this:

```
ren tuesday monday
```

To enter the revised command, press ENTER.

How MS-DOS Responds to Commands

MS-DOS responds in various ways to the commands you enter. You might see a display or message telling you that the command has been successfully completed. Or, MS-DOS might ask you for more information, or display a message telling you that you didn't type the command correctly.

When you type some commands, MS-DOS asks for more information by displaying a prompt. For example, if you type the **time** command, MS-DOS displays the following prompt:

```
Current time is: 9:52:18
 Enter new time:
```

In response, you enter the information requested, in this case the new time.

Sometimes MS-DOS will verify that you really want to do what you asked. For example, suppose you use the **del** command with MS-DOS wildcards described in Chapter 5 to delete all files in a directory:

```
del *.*
```

MS-DOS displays the following message:

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

```
All files in directory will be deleted!
Are you sure (Y/N)?
```

If you realize that you don't want to delete all files, you can enter **n**. MS-DOS will return to the command prompt without deleting the files. If in fact you want to delete all files, enter **y**. MS-DOS will go ahead and delete the files.

Sometimes MS-DOS displays the results of a command. For example, when you enter the **copy** command, MS-DOS displays the name of the file or files copied. If you entered a command telling MS-DOS to make a copy of three files named JAN.DOC, FEB.DOC, and MAR.DOC, you would see the following display.

```
JAN.DOC
 FEB.DOC
 MAR.DOC
 3 file(s) copied
```

This display, and other displays like it, gives you a chance to make sure that the command you entered has been performed correctly.

Sometimes MS-DOS displays an error message indicating that it didn't understand the command you entered. If you get an error message, reenter the command with a **/?** switch to get online help with the command. Or, look in Part Three of the *MS-DOS 5.0 User's Reference* for ways to correct the error.

Pausing or Canceling a Command

You can tell MS-DOS to pause what it is doing temporarily by pressing CTRL+S or the PAUSE key. If you use PAUSE, press the key again to resume the command; if you use CTRL+S, press any key. You can stop and restart a command as many times as you want.

If you enter a command and then realize that you want to stop MS-DOS from completing it, press CTRL+BREAK or CTRL+C. These key combinations tell MS-DOS to stop what it's doing and return to the command prompt.

NOTE Anything MS-DOS has done before you press CTRL+BREAK or CTRL+C cannot be undone.

Telling MS-DOS Which Disk Drive to Use

MS-DOS needs to know which disk drive to use. The disk drive that MS-DOS uses automatically is called the *current drive*. MS-DOS always uses one drive as the current drive. You can tell which drive is the current drive by looking at the let-

t-mark • Wed May 16 18:09:40 1990 • MICROSOFT CONFIDENTIAL

ter at the beginning of the MS-DOS command prompt. On most systems, if the letter is A (or B), one of the floppy disk drives is the current drive. If the letter is C, the hard disk drive is the current drive. Some systems have drives with other letters as well (these are usually hard disk drives, or special kinds of drives).

As long as the files or directories you want to work with are on a disk in the current drive, you do not need to tell MS-DOS which drive to use; MS-DOS assumes the current drive. If the files or directories are not located on the current drive, you can either specify the drive as part of a command or change the current drive.

To specify a drive other than the one that's current, include the drive letter in the command parameter. For example, suppose the current drive is C. To list the files on the disk in drive A, include the A drive as a parameter in the **dir** command:

```
dir a:
```

This command tells MS-DOS to list the files in drive A. Notice that the drive letter in this command must be followed by a colon.

To change the current drive, enter the letter of the drive followed by a colon (:). For example, to change the current drive from C to A, enter:

```
a:
```

As a result, MS-DOS automatically uses drive A.

Internal and External Commands

MS-DOS automatically loads some commands into memory when you switch on your system. These *internal* commands are included in the main part of MS-DOS. Internal commands include **dir**, **del**, **date**, and **time**. MS-DOS stores other *external* commands in files on disk and transfers them from disk to memory as you need them. You can determine whether a command is internal or external by consulting its description in the *MS-DOS 5.0 User's Reference*.

When you install MS-DOS 5.0, it places external command files in a location it can find. If you move the files, make sure you tell MS-DOS their new location by using the **path** command described in Chapter 6, "Working With Directories".

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Chapter 4

Shell Basics

4

The Shell is a graphical interface to MS-DOS. You can use the Shell to organize files and directories, make backup copies of files, run programs, and perform most other MS-DOS tasks. By using the Shell, you can list and choose options from menus. The Shell also gives you a visual display of the directories and files on your disk drives. This makes it easy for you to move from one directory to another, and to choose specific files to work with. You can also use the Shell to put programs into groups to make them easier to find and use.

Starting the Shell

Depending on the way MS-DOS was installed on your system, you start the MS-DOS Shell in one of three ways.

If you have a hard disk system, and you see the Shell screen when you switch on your system, the Shell is set up to run whenever you start your system.

t-mark • Wed May 16 18:09:40 1990 • MICROSOFT CONFIDENTIAL

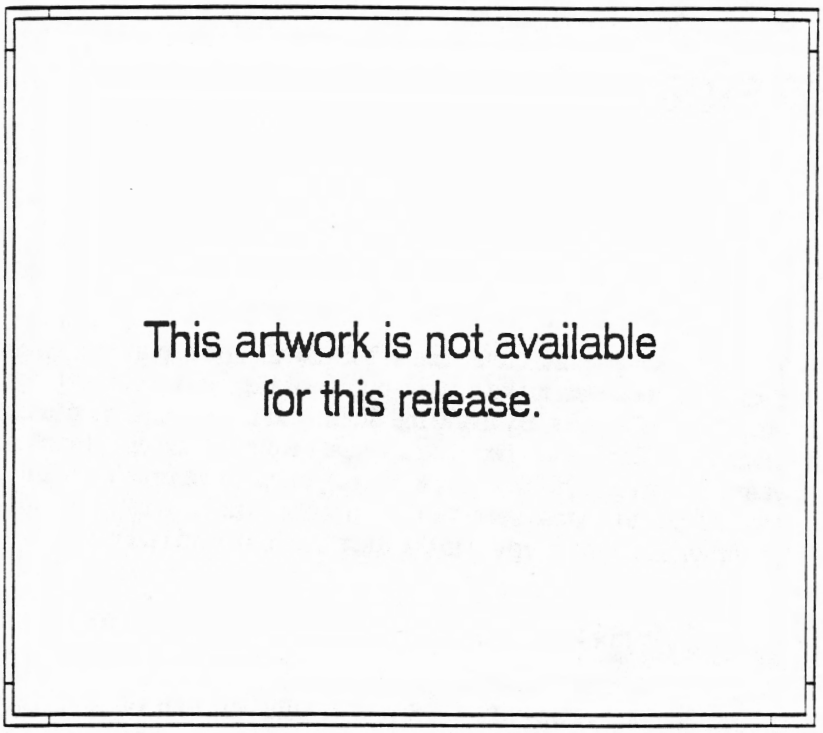

shb_1

If you have a hard disk system, and you see the command prompt when you switch on your system, start the Shell by entering **dosshell**.

If you have a floppy disk system, start MS-DOS using the STARTUP disk. When the command prompt appears, insert the SHELL floppy disk into drive A:, enter **dosshell**. After a few moments the Shell screen appears.

If you are using a mouse with the Shell, make sure that you install MOUSE.COM before invoking the Shell.

Understanding the Shell and Its Screens

The first time you start the MS-DOS Shell, you see Program Manager. You use Program Manager to run programs and organize them into groups.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

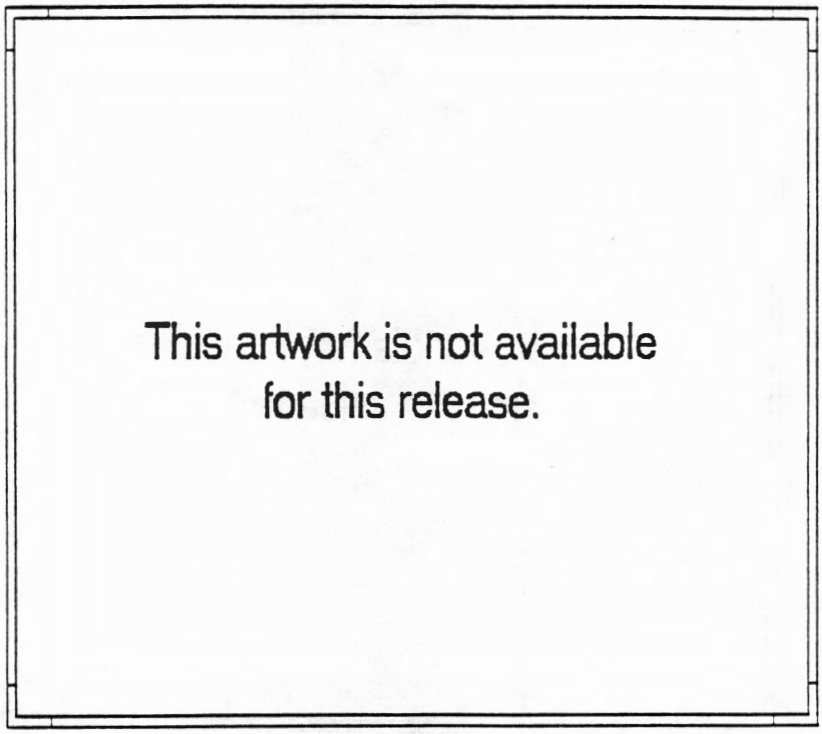

shb_2

To work with files and directories, you use File Manager.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

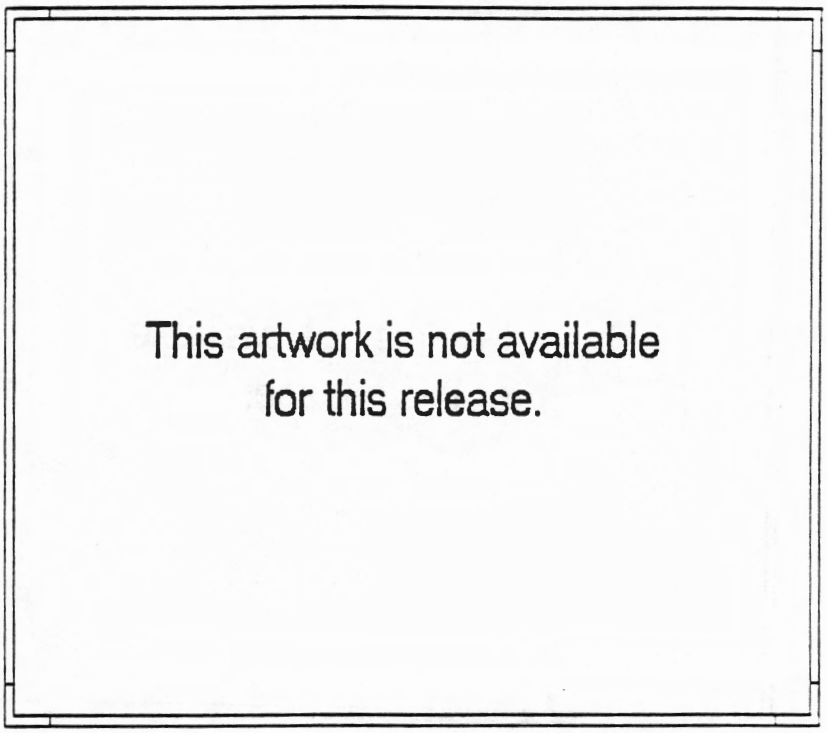

shb_3

You'll learn more about both these components of the Shell later in this chapter.

Shell Screen Elements

Both Program Manager and File Manager have some basic screen elements in common. The following illustration shows you these basic elements as they appear on the Program Manager screen.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

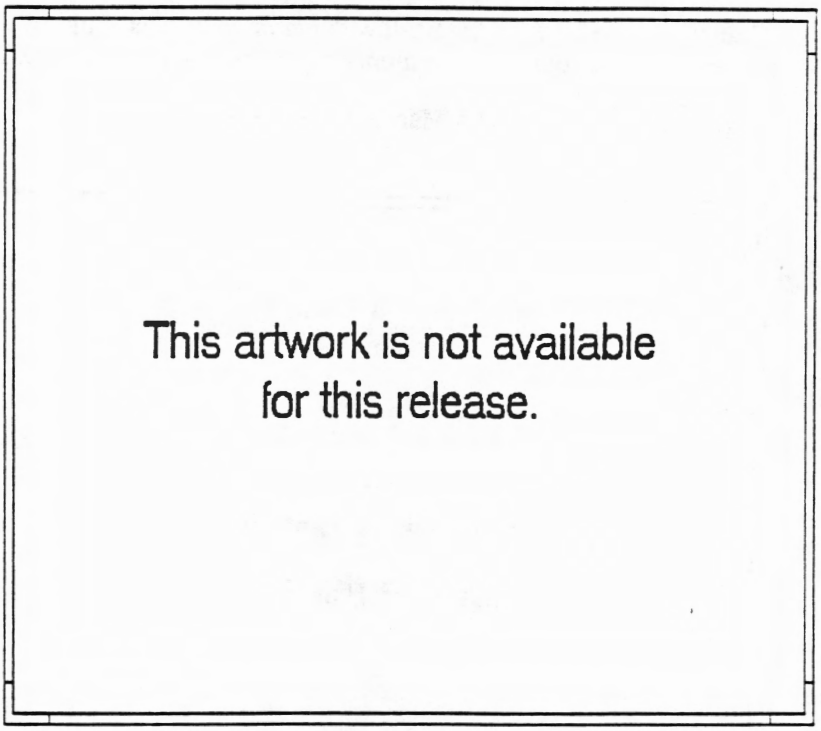

shb_4

The *title bar* shows you the name of the screen you are working with (Program Manager or File Manager), along with the current date and current time. The *menu bar* shows you the names of the available menus. When you select a menu, it displays a list of commands you can choose from. The *selection area* displays the programs, files, and directories you work with in the Shell. You use the *selection cursor* to select programs, files, or directories from the selection area, and to choose commands from menus. The *key definition line* displays information about function keys you can use to perform basic tasks. You will learn how to use these screen elements later in this chapter.

Text Mode and Graphics Mode

The Shell appears on your screen in one of two modes: graphics mode or text mode.

t-mark • Wed May 16 18:09:40 1990 • MICROSOFT CONFIDENTIAL

Graphics mode displays the Shell with graphic symbols, called *icons*. To use graphics mode, your system's monitor must be CGA, VGA, or EGA.

In graphics mode, Program Manager looks like this:

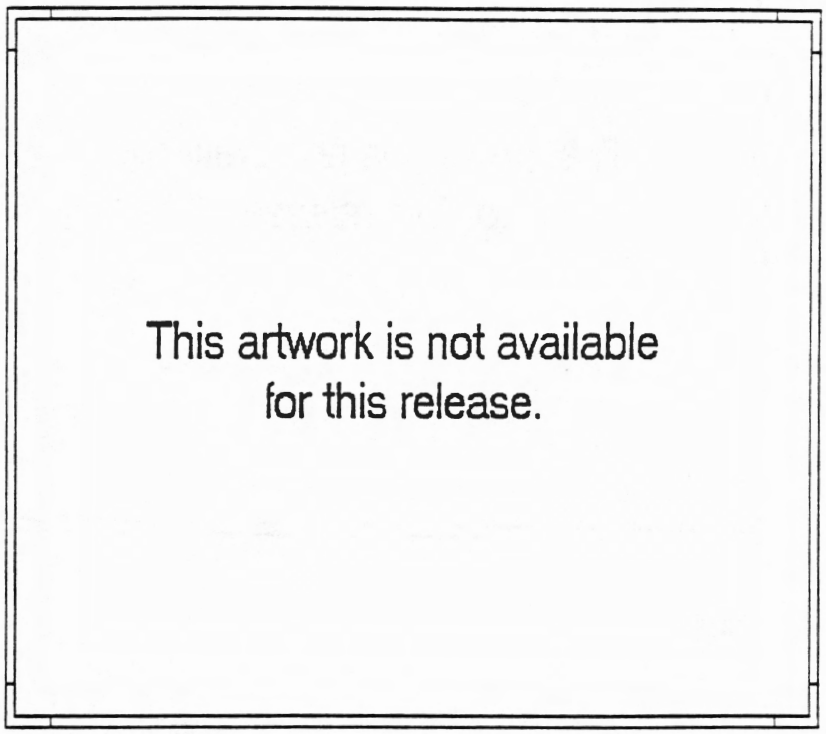

shb_5

Text mode displays the Shell without icons. You can choose to display the shell in text mode, even if your screen can display graphics mode. You can move through lists of files and directories more quickly in text mode.

In text mode, Program Manager looks like this:

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

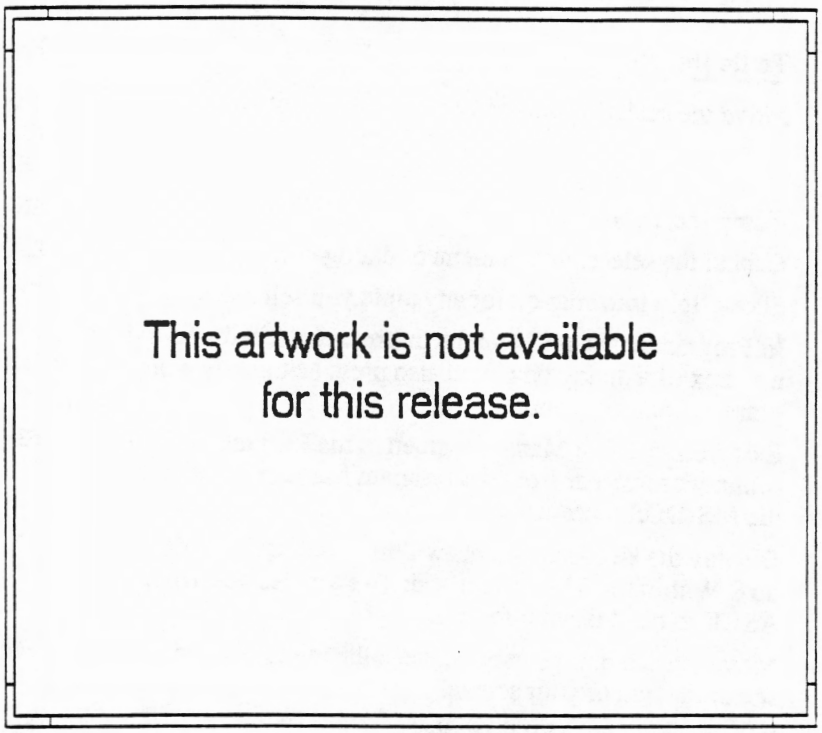

shb_6

You can choose among several variations of both text mode and graphics mode, depending on the number of lines you want to display on your screen. For information about switching between graphics mode and text mode, see "XX", later in this chapter.

The illustrations and explanations in this guide refer to graphics mode. The guide notes significant differences between text mode and graphics mode.

Using the Keyboard with the Shell

You can use either the keyboard or a mouse to work with the Shell. If you use the keyboard, you can use the keys in the following list to move around on the Shell screen, select menus, choose commands, and get Help when you need it.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

To do this	Press these keys
Move the selection cursor.	ARROW keys, TAB, or SHIFT+TAB
Complete a command.	ENTER
Cancel the selection of a menu or dialog box.	ESC
Show Help information for any topic you select.	F1
In Program Manager, save the information typed into the text box of a dialog box. You also press F2 to copy a program to another group.	F2
Exit from the File Manager screen to the Program Manager screen or from the Program Manager screen to the MS-DOS prompt.	F3
Display the key assignments within a Help information box. Within the View command, F9 switches you from ASCII to hexadecimal format.	F9
Move the selection cursor between the menu bar and the selection area of your screen.	F10 or ALT
Display an index of Help topics.	F11
Return to the command prompt.	SHIFT+F9

Working with the Shell

The Shell provides a graphical environment for running programs and performing MS-DOS file-management tasks. To use the Shell, you need to know how to choose commands from *menus* and how to give MS-DOS specific instructions using *dialog boxes*.

Working with Menus

Much of your work with the Shell involves choosing commands from menus. When you start working with a Shell screen, you see the names of the menus displayed in the menu bar near the top of the screen. When you open a menu, you see a list of commands. The following example shows the commands in the File menu in File Manager.

t-mark • Wed May 16 18:09:40 1990 • MICROSOFT CONFIDENTIAL

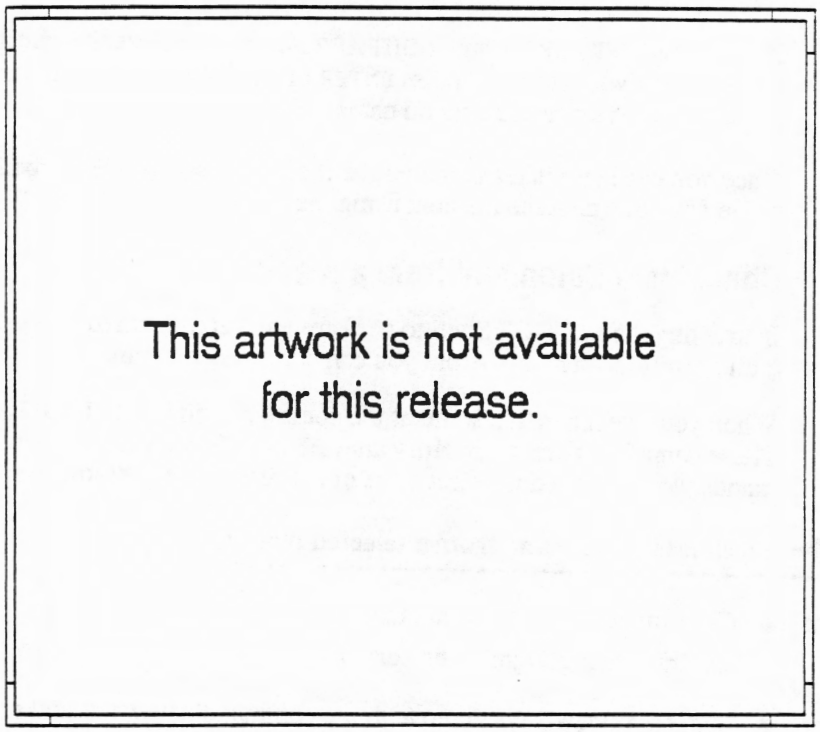

shb_7

Selecting a Menu

To open a menu and see its commands, you *select* the menu you want to use. Once you have selected a menu, you can choose a command from it.

▶ **To select a menu:**

Mouse ■ Click the name of the menu.

Keyboard 1. Move the selection cursor to the menu bar by pressing F10 or ALT. In File Manager, you can also press the TAB key or SHIFT+TAB one or more times to do this.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

2. Use the LEFT ARROW and RIGHT ARROW keys to move the selection cursor to the menu you want, and press ENTER or DOWN ARROW. You can also press the highlighted letter in the menu name.

Once you have selected a menu with either the mouse or the keyboard, you can move from one menu to the next using the RIGHT and LEFT ARROW keys.

Choosing a Command from a Menu

Instructing the MS-DOS Shell to perform an action is called *choosing* a command. You must select a menu before you can choose a command.

When you select a menu, some of the commands on it may be only faintly visible. These commands are temporarily unavailable. If you want to use one of these commands, you first need to select a file or a directory, or perform some other action.

▶ **To choose a command from a selected menu:**

Mouse ■ Click the name of the command.

Or drag the highlight to the command and release the mouse button.

Keyboard ■ Use the ARROW keys to move to the command you want, and press ENTER.

Or press the highlighted letter of the command. For example, to choose Copy from the File menu, press C.

▶ **To select a menu and choose a command in one step:**

1. Point to a menu name and hold down the mouse button.
2. Drag the highlight to the command you want and release the mouse button.

   If you don't want to choose a command, drag the mouse cursor outside the menu before you release the mouse button.

Canceling a Selection

If you select a menu and then decide you don't want to use it, you can cancel the selection by pressing ESC or F10, or by clicking anywhere outside the menu on the Shell screen.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Working with Dialog Boxes

To perform many of the commands in Shell menus, MS-DOS needs information from you. For example, if you want to rename a file, MS-DOS needs to know the new name of the file.

Entering Information in a Dialog Box

When you choose an MS-DOS command that requires additional information, a dialog box appears. Each dialog box asks for different information. For example, when you choose Rename from the File menu, the Shell displays the following dialog box.

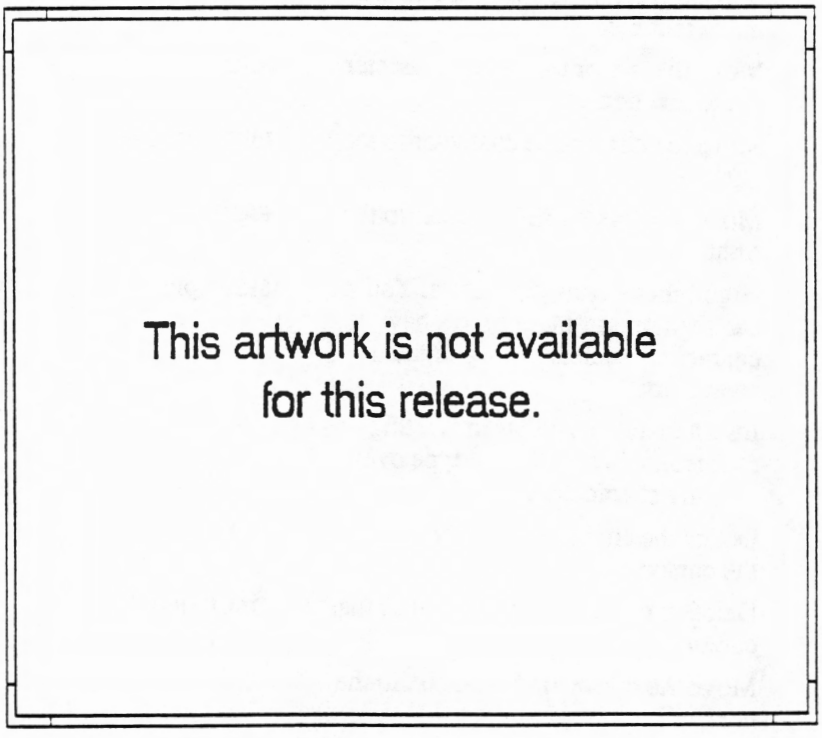

shb_8

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Like most other dialog boxes, the Rename File dialog box includes a smaller *text box* where you can type information. In this case, you type the new name of the file in the "New name" box. A *cursor* marks where you can type text. As you type, characters appear in the text box and the cursor moves to the right. In some cases, you can type more characters in a box than can be displayed at one time. When the box is full, you can continue entering characters. The existing characters scroll to the left. When the characters in a box are highlighted, the new characters you type replace the existing characters.

You can use the following keys to edit the information you type in boxes.

To do this	Press this key
Move the cursor to the first character in the text box.	HOME
Move the cursor to the last character in the text box.	END
Move the cursor one character to the left.	LEFT ARROW
Move the cursor one character to the right.	RIGHT ARROW
Highlight existing characters. You can then press DEL or type a new character to delete the highlighted characters.	SHIFT plus any of the preceding keys
Insert characters between existing characters (press again to type over existing characters).	INS
Delete the character directly above the cursor.	DEL
Delete the character to the left of the cursor.	BACKSPACE
Move the cursor from one box to the next.	TAB
Move the cursor to the previous box.	SHIFT+TAB
Move from one box to the next.	UP or DOWN ARROW

If you have a mouse, you can use it to do the following:

- Click anywhere in the characters you've typed to move the cursor there.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

- Click a different box to move the cursor there. If there is existing text in the box, it is highlighted.
- Drag left or right to highlight existing text. Then you can press DEL or another character to delete the highlighted characters.

Selecting Options in a Dialog Box

Some dialog boxes include one or more options. For example, suppose you choose the File Options command from the Options menu. The Shell displays the following dialog box.

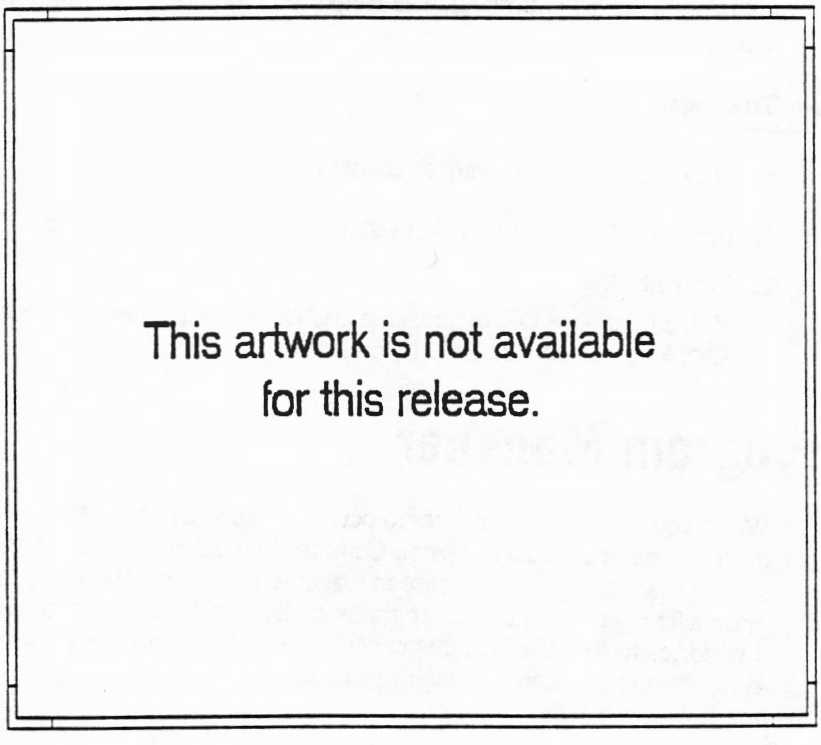

shb_21

In this box, the first two options are already selected. You can change the options by selecting or canceling them.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

▶ **To select or cancel an option:**

Mouse ■ Click the option you want to change.

Keyboard 1. Press TAB or the ARROW keys to move to the option you want to change.

2. Press the SPACEBAR.

Entering, Canceling, or Getting Help

Almost all dialog boxes have three *buttons* at the bottom. The OK button tells MS-DOS to perform the command using the information in the dialog box. The Cancel button cancels the command. The Help button displays information about the command.

▶ **To choose a button:**

Mouse ■ Click the button you want to choose.

Keyboard 1. Press the TAB or ARROW keys to move to the button you want.

2. Press ENTER.

   You can choose OK by pressing ENTER. You can choose Cancel by pressing ESC. You can choose Help by pressing F1.

Using Program Manager

When you want your computer to perform a specific task, you tell it to follow a set of instructions called a *program.* Commonly used programs include word processors, spreadsheets, and database management systems. By using the MS-DOS Program Manager, you can run programs easily, without having to search through directories to find the files that contain them. By adding the programs you use most often to Program Manager, you can start each one with the click of a mouse or a few keystrokes.

In this section, you will learn the basic skills needed to use Program Manager. You will also find an overview of the commands in Program Manager menus.

Understanding the Program Manager Screen

Program Manager's selection area includes a list of programs you can choose. This list is called the Main group. When you first start using the Shell, the Main group includes the following programs:

t-mark • Wed May 16 18:09:40 1990 • MICROSOFT CONFIDENTIAL

This program	Does this
Command Prompt	Returns you to the the command prompt
File Manager	Moves you to the Shell File Manager.
Change Colors	Changes the appearance of the Shell screens

The folder icon next to the DOS Utilities listing indicates that it is the title of a group of programs, rather than a single program (in text mode, programs are shown in uppercase letters and groups are shown in lowercase letters), You can view the programs in a group by selecting the name of the group.

Running Programs

You can run any program listed in the Main group or in any of the subgroups, by choosing it.

▶ **To run a program from Program Manager:**

Mouse

- Double click the program you want to run.

  Or click the program name once, and choose Start from the Program menu.

  If there is a long list of programs, and the program you want does not appear in the selection area, use the scroll bar to scroll to the program you want, and then double click it.

Keyboard

1. Use the ARROW keys to move the selection cursor to the program you want to run. If there is a long list of programs, press PAGE UP or PAGE DOWN to move more quickly.
2. Press ENTER, or choose Start from the Program menu.

You can also run programs from the File Manager menu by using the Open File command or choosing the file that contains the program from the appropriate disk and directory. For more information, see "XX".

The Shell lets you display a customized dialog box when you start running a program. For more information, see "XX".

Working with Groups of Programs

You can make programs easier to work with by organizing them into groups. A group is similar to a directory: it organizes the names of several programs in a

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

single location so you can find them easily. However, a group only organizes programs visually. Putting a program in a group does not change its directory location.

Viewing a Group

To run a program that is listed in a group, you display the group and choose the program you want.

▶ **To display the list of the programs in a subgroup:**

Mouse

- Double-click the title of the group you want to view.

  You can now run any of the programs listed in the group.

Keyboard

1. Use the ARROW keys to move the selection cursor to the group you want to view.
2. Press ENTER.

   You can now run any of the programs listed in the group.

To return to the Main group, press ESC.

Creating and Modifying Groups

To create and modify groups of programs, use commands in the Group menu. You can use these commands to add new groups, change the information in existing groups, delete a group, or reorder the programs in a group.

Use this command	To do this
Add	Add a group and specify its title, filename, and additional information.
Change	Change the information associated with a group.
Delete	Delete a group.
Reorder	Change the order of programs in a group.

For more information about creating and modifying groups of programs, see "XX".

Working with Programs

You can add programs to any group by using the commands in the Program menu. You can give names to your programs and enter the commands MS-DOS needs to

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

run them. You can also add a help message to make a program easier to use, include a password to restrict access to a program, delete programs you don't need any more, and change or copy the information for a program. The Program menu includes the following commands:

Use this command	To do this
Start	Run a program (same as choosing it from the list).
Add	Add a program to the currently listed group.
Change	Change the information associated with a program.
Delete	Delete a program from the current group.
Copy	Copy a program to a different group.

For more information about adding programs, see "XX".

Moving from Program Manager to File Manager

To move from Program Manager to File Manager, choose FILE MANAGER from the Program Manager Main group.

Using File Manager

File Manager makes it easy for you to work with files, directories, and disks. You can use File Manager to:

- View the files stored in directories and on disk drives.
- Select one or more files from a directory.
- Choose commands from the File Manager menus to work with a disk drive, directory, file, or group of files you have selected.

In this section, you will learn the skills you need to move around the File Manager screen and select drives, directories, and files. You will also find an overview of the commands on the File Manager menus.

Understanding the File Manager Screen

The File Manager screen includes basic Shell screen elements, and includes several additional items.

t-mark • Wed May 16 18:09:40 1990 • MICROSOFT CONFIDENTIAL

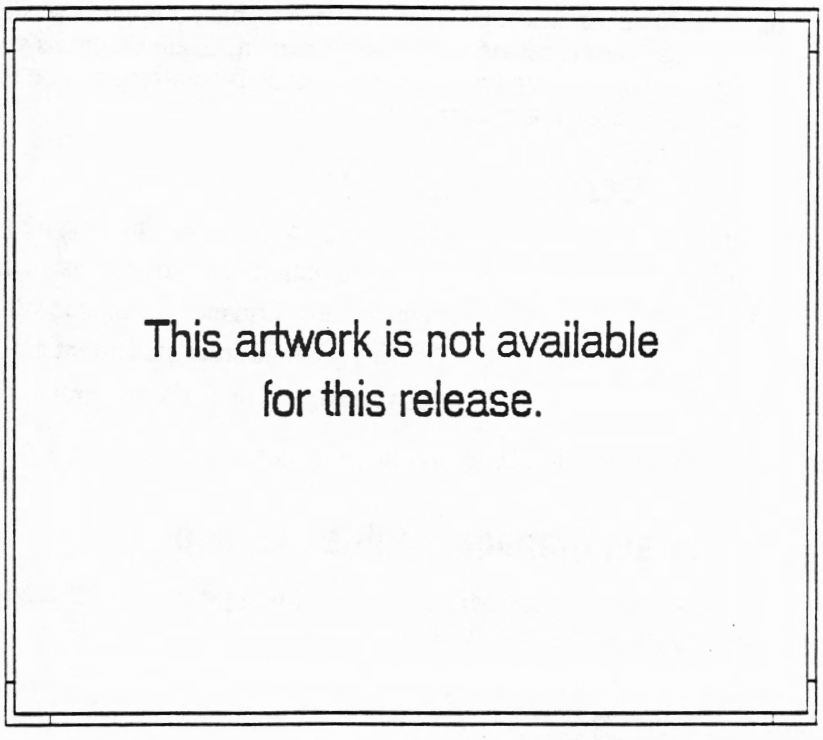

shb_9

The *disk-drive icons* show which disk drive you are currently using.

The *directory identifier* shows which directory you are currently using.

The *Directory Tree* displays some or all of the directories on the currently selected drive, and shows you which directory is currently selected.

The *file list* displays some or all of the files in the currently selected directory, and shows you which files (if any) are selected.

Understanding File Manager Icons

In graphics mode, File Manager uses several icons to represent the types of information it lists. The icons and their meanings are listed below. Some icons are used

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

in both Program Manager and File Manager. In text mode, the Shell does not display icons.

This artwork is not available for this release

shb_10

Floppy disk drive

This artwork is not available for this release

shb_11

Hard disk drive

This artwork is not available for this release

shb_12

Directory

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

This artwork is not available for this release

shb_13

Program file

This artwork is not available for this release

shb_14

Non-program file

Selecting a Disk Drive

When you start the Shell, File Manager displays the contents of the disk drive that contains the command files for the Shell. If you are using a floppy disk system, this is probably the A drive. If you are using a hard disk, File Manager probably displays the C drive. To work with files on another drive, you select a drive icon from the File Manager screen. When you select a different drive, the Directory Tree and file list show the contents of the root directory on the new drive. If there are many directories on the new drive, the Shell displays a message while it sets up the Directory Tree: "Reading Disk Information . . ."

▶ **To change the current drive:**

Mouse

- Click the drive you want to use.

Keyboard

1. Press TAB until one of the drive indicators is highlighted.
2. Use the ARROW keys to move the highlight to the drive you want to use.
3. Press ENTER.

t-mark • Thu May 17 10:27:53 1990 • MICROSOFT CONFIDENTIAL

If you change floppy disks when you are using the Shell, the file list will continue to display the files on the old floppy disk until you select the disk drive icon again using one of the above methods.

Selecting a Directory

When you select a directory other than the one currently displayed, the directory indicator changes to show the name of the new directory, the new directory is highlighted in the Directory Tree, and the file list displays the files in the new directory.

▶ **To select a directory:**

Mouse

- Click the the name of the directory you want to select.

  If you have a long list of directories and the directory you want does not appear, use the scroll bar on the right side of the Directory Tree to scroll the directory you want into view, and then click it.

Keyboard

1. Press the TAB key until the selection cursor moves to the Directory Tree.

   If you are in graphics mode, you will not always be able to see the selection cursor when you use TAB to move to the Directory Tree. If you aren't sure where you are on the File Manager screen, press the UP or DOWN ARROW key to see where the selection cursor is.

2. Use the UP ARROW and DOWN ARROW keys to move the selection cursor from one directory to the next.

   If you have a long list of directories, you can use the PAGE UP and PAGE DOWN keys to move more quickly.

3. When the selection cursor is at the directory you want, press the SPACEBAR.

There are many other methods you can use to display directories. For more information about displaying directories in the Shell, see "XX".

Selecting Files

Before choosing Shell file-management commands, you must select the files you want to use from the file list. The directory that contains the file or files you want to use must be displayed. (For more information about selecting a directory, see the preceding section.)

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

You select files by moving the selection cursor or by clicking files with the mouse. The Shell highlights the files you select. If you are using graphics mode, the icon next to a file changes color when you select it. In text mode, a small triangular pointer appears next to a selected file.

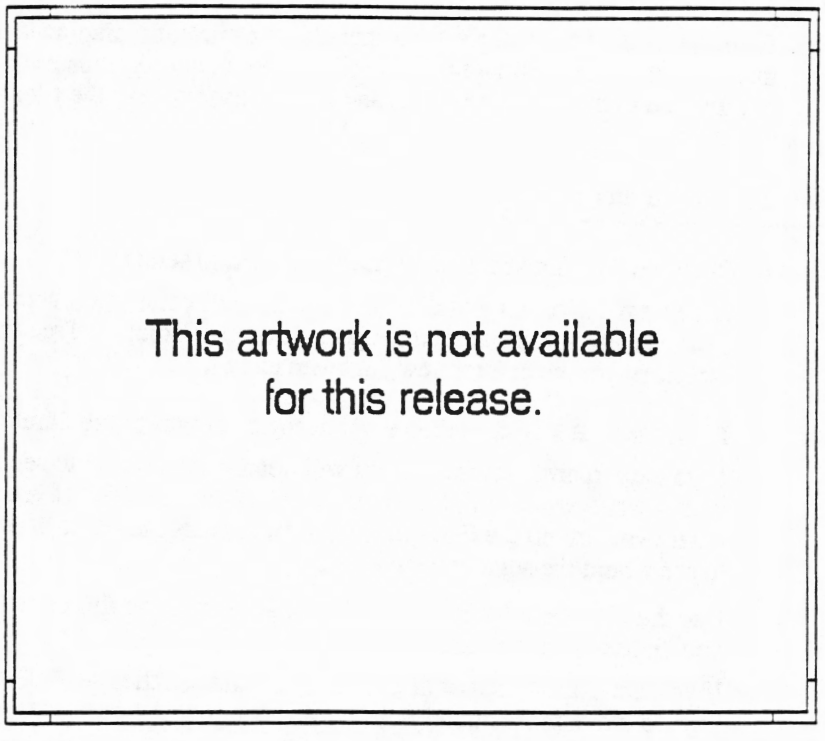

shb_15

Selecting a Single File

▶ **To select a file:**

Mouse ■ Click the file you want to select.

If there is a long list of files, and the file you want does not appear, use the scroll bar on the right side of the file list to scroll the file you want into view, and then click it.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

The Shell highlights files as you select them. In graphics mode, the selected file's icon changes color. In text mode, a small triangular pointer appears next to the file you selected.

To cancel a selection, click it again.

Keyboard

1. Press the TAB key until the selection cursor moves to the file list.

   If you are in graphics mode, you will not always be able to see the selection cursor when you use TAB to move to the file list. If you aren't sure where you are on the File Manager screen, press the UP or DOWN ARROW to see where the selection cursor is.

2. Use the UP ARROW and DOWN ARROW keys to move the selection cursor to the file you want to use. As you move, individual files are selected automatically.

   The Shell highlights files as you select them. If you are in graphics mode, the selected file's icon changes color. If you are in text mode, a small triangular pointer appears next to the selected file.

   To cancel a selected file, press CTRL+SPACEBAR.

Selecting a Group of Files

You might want to select several files at once. Multiple selections are particularly useful when you want to delete or copy a number of files. You can select a group of files that are listed together or out of consecutive order in a directory. You can also select files from more than one directory at once.

▶ To select two or more files in consecutive order:

Mouse

1. Click the first or last file in the list you want to select.
2. Hold down the SHIFT key, and drag the highlight up or down until all the files you want are selected.

   To cancel the selection, click any file without holding down the SHIFT key.

Keyboard

1. Move the selection cursor to the first or last file in the list you want to select.
2. Hold down the SHIFT key.
3. Press the UP ARROW, DOWN ARROW, PAGE UP, and/or PAGE DOWN keys to move to the other end of the list.

   Without letting go of the SHIFT key, press the SPACEBAR to highlight all the files.

   To cancel the selection, press the SPACEBAR without holding down the SHIFT key.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

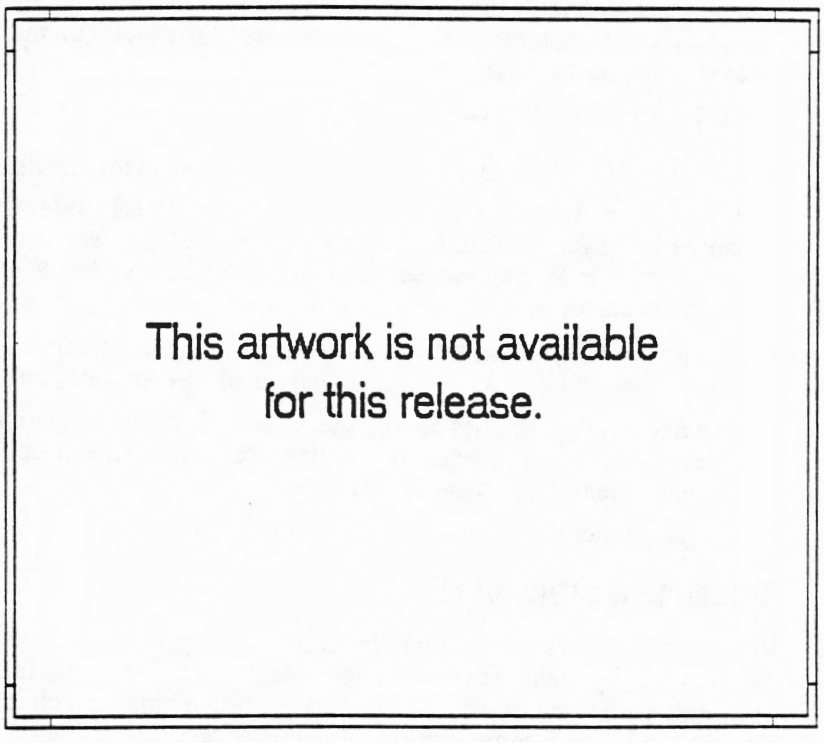

shb_16

▶ **To select two or more files that are not in consecutive order:**

Mouse

- Hold down CTRL key while you click each file you want to select.

  To cancel the selection of an individual file, keep holding down the CTRL key and click the file you want to cancel.

  To cancel the selection of all the files, let go of the CTRL key and click any file.

Keyboard

1. Select the first file you want to select.
2. Press SHIFT+F8.

   After you press this key combination, you can move the selection cursor without cancelling the selection of the first file.
3. Move the selection cursor to the next file you want to select.

4. Press CTRL+SPACEBAR to select each additional file.

   To cancel the selection of individual files, move to the file you want to cancel and press CTRL+SPACEBAR again.

5. Press SHIFT+F8 again when you have finished selecting files.

   To cancel the entire selection, choose Deselect All from the File menu.

TIP You can select a group of files with the keyboard or mouse by using the preceding procedures, and holding down SHIFT when you select a second file. All the files between the first file and second file you selected are also selected.

▶ To select all the files listed in a directory at once:

- Choose Select All from the File menu.

▶ To cancel all selections:

- Choose Deselect All from the File menu.

▶ To select files from more than one directory at once:

1. Choose File Options from the Options menu.
2. Select the Select Across Directories option.
3. Select one or more files from any directories on any drive.
4. When you are finished, cancel the Select Across Directories option, to avoid accidentally selecting files you don't want.

For more information about using the Shell to work with files, see "XX".

Running a Program from File Manager

You can use File Manager to run programs, just as you can with Program Manager.

▶ To run programs from File Manager:

Mouse

1. Double-click the file that contains the program you want to run.
2. Choose OK in the Open File dialog box.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Keyboard

1. Select the file that contains the program you want to run and press ENTER.
   Or choose Open (Start) from the File menu.
2. Type the name of the file that contains the program you want to run.
   If the dialog box already contains the filename, skip this step.
3. Press ENTER.

For more information about running a program from File Manager, see "XX".

Using the File Manager Menus

The FIle Manager includes four menus–File, Options, Arrange, and Tree–that provide commands for working with drives, directories, and files. This section provides a brief overview of the menus and the commands in them. You'll find more detailed information about the commands later in this guide.

File Menu

The File menu contains commands you use to work with files. From this menu you can choose commands to copy, rename or delete files, move them from one directory to another, search for a file you've misplaced, look at the contents of a file, and perform other file-management tasks.

The following list describes each command in the File menu.

Use this command	To do this
Open (Start)	Open or start a file.
Print	Print one or more files.
Associate	Link files to a program, so you can open a file and start the program at the same time.
Move	Move one or more files from one directory to another.
Copy	Copy one or more files to a different directory.
Search For	Search for one or more files anywhere on a disk drive.
Delete	Delete one or more files, or delete a directory if no files are selected.
Rename	Give one or more files a new name, or give a directory a new name if no files are selected.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Use this command	To do this
Change attribute	Set read-only, archive, hide, and system attributes for one or more files.
View	Display the contents of a file on the screen.
Create directory	Make a new directory.
Select all	Select all the files displayed.
Deselect all	Cancel all the selections.
Exit	Quit File Manager, and return to Program Manager.

Options Menu

You choose commands in the Options menu to modify options for displaying and working with files.

The following list describes each command in the Options menu.

Use this command	To do this
Display options	Change the number and order of files listed in directories.
File options	Confirm deletion and replacement of files, and select files across directories.
Show information	Shows file, directory and disk information.

Arrange Menu

You use commands in the Arrange menu to change the display of directories and files on the screen.

The following list describes each command in the Arrange menu.

Use this command	To do this
Single file list	Display the file list of a single directory.
Multiple file list	Display the file lists of two directories at the same time.
System file list	Display all the files on a drive in a single directory.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Tree Menu

You choose commands in the Tree menu to rearrange the layout of the Directory Tree.

The following list describes each of the commands in the Tree me...

Use this command	To do this
Expand One Level	Display an additional level of subdirectories below the selected directory.
Expand branch	Display all the subdirectories of the selected directory.
Expand all	Display all the subdirectories in the Directory Tree.
Collapse Branch	Remove subdirectories of the selected directory from the display.

Help Menu

You choose commands in the Help menu to get information about the Shell.

Use this command	To do this
Help	Display information about the Shell.
Index	Display an index of Help topics.
Keys	Display information about using a keyboard with the Shell.

Moving from File Manager to Program Manager

To move from File Manager to Program Manager, press F3 or choose Exit from the File menu.

Getting Help

The MS-DOS Shell's Help system provides information about menus, options, and commands.

▶ **To get help:**

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

- Press F1 at any time.

  Or choose the Help button in any dialog box.

  Or choose Help from the Help menu in either Shell screen.

When you choose Help, the Shell displays a Help dialog box, with information about the selected menu, command or dialog box.

For example, if you ask for Help when the Rename command is highlighted, the following dialog box appears.

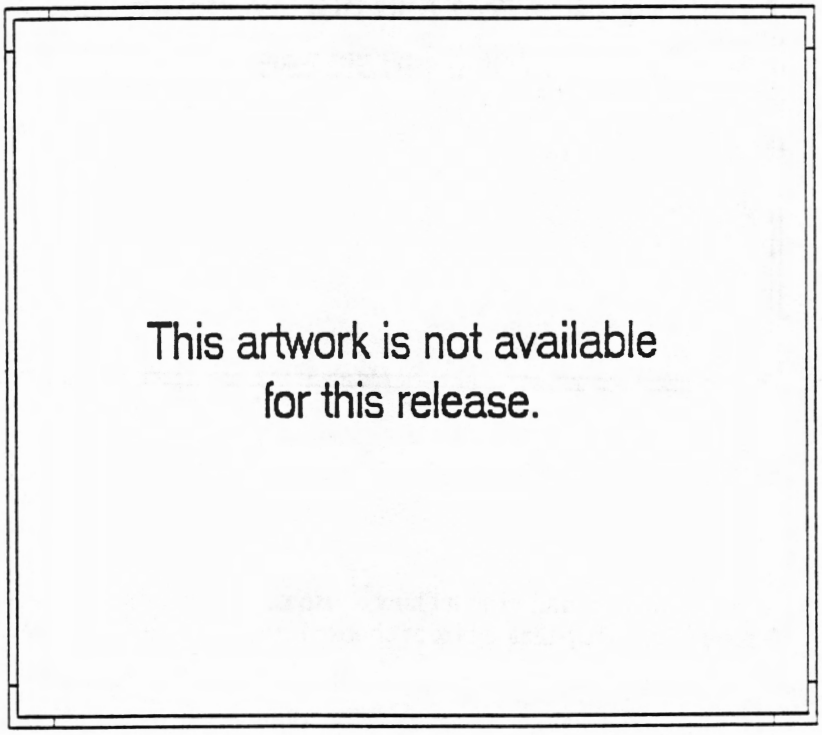

shb_17

If you want information about a topic other than the one currently displayed, choose the Index button in any Help dialog box or choose Index from the Help menu.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

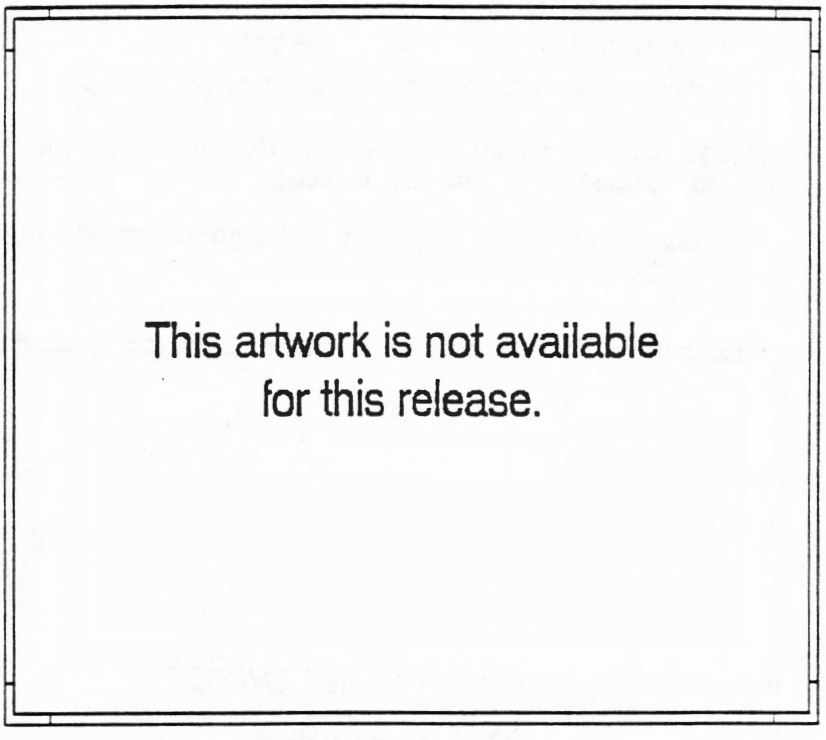

shb_18

If you want information about how to use keys on your keyboard, choose the Keys button in any Help dialog box or choose Keys from the Help menu.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

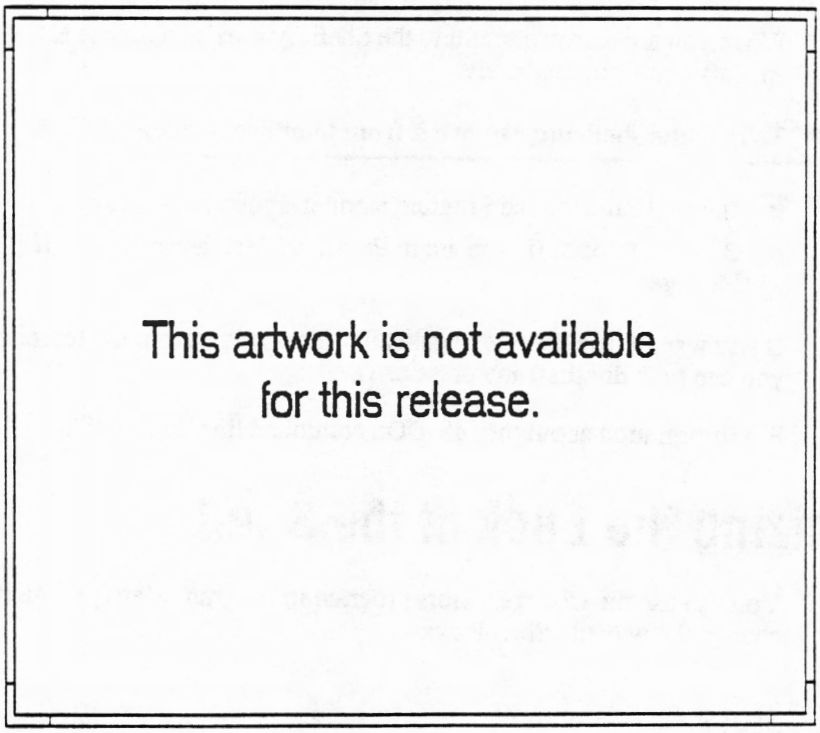

shb_19

Leaving the Shell

You can leave the Shell and move to the MS-DOS command line in several ways. You can quit the Shell temporarily, work with the MS-DOS command line while the Shell is still in your system's temporary memory, and return to the Shell quickly. Or, you can quit the Shell and remove it from your system's temporary memory.

▶ To leave the shell temporarily:

- Choose COMMAND PROMPT from Program Manager.
  Or press SHIFT+F9.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

When you are ready to return to the Shell, type **exit** and press ENTER. The Shell re-appears almost immediately.

▶ **To quit the shell and remove it from temporary memory:**

- Choose Exit from the Program menu in Program Manager.

  Or press F3 once (if you are in Program Manager) or twice (if you are in File Manager).

If you want to use the Shell again after removing it from the temporary memory, you can type **dosshell** and press ENTER.

For information about the MS-DOS command line, see "XX".

Customizing the Look of the Shell

You can use the Change Colors program in Program Manager Main group to change the way the Shell looks.

Changing Colors

If you have a color display, you can use the Change Colors program to change the colors used in the Shell's screens. If you have a a monochrome display, you can use the Change Colors program to change the dark and light colors used in the Shell's screens.

▶ **To change screen colors:**

1. Choose the Change Colors program from Program Manager Main group.

   You see a display of the colors currently in use, along with a dialog box:

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

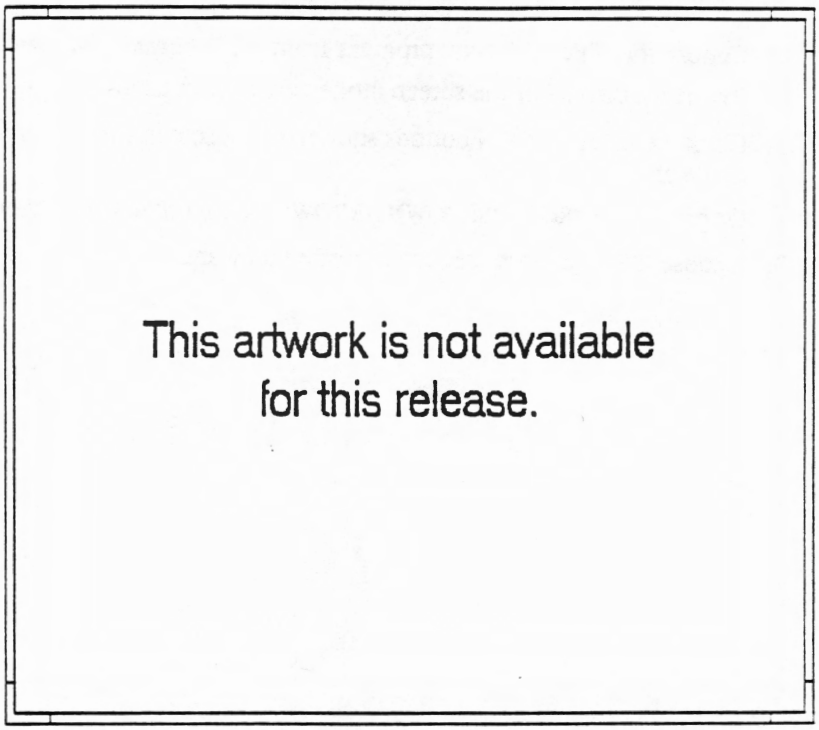

shb_20

2. Click the LEFT and RIGHT buttons shown on the screen to view other color choices.

   Or press the LEFT and RIGHT ARROW keys to view other color choices.

3. Choose OK to choose the color combination you want.

Changing Screen Modes

The Change Colors program also allows you to switch between the available text modes and graphics modes. For more information about the differences between these modes, see XX.

▶ **To change between text and graphics mode:**

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

1. Choose the Change Colors program from the Program Manager Main group.

   You see a display of the screen mode currently in use.

2. Click the UP and DOWN buttons shown on the screen to view other screen mode choices.

   Or press UP ARROW and DOWN ARROW to view other screen mode choices.

3. Choose OK to choose the screen mode you want.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Part 2
Working with MS-DOS

Beta Release

Beta Release

Chapter 5

Working with Files

5

Files organize the information that your computer uses. MS-DOS itself is stored in a file that is read into memory when you switch on your system. While there are a number of different types of files, every file has a name and location that uniquely identifies it, and a group of attributes that describe it.

Types of Files

Much of the information stored in files is text such as letters, punctuation and special characters (*, @, and |). Other information stored in files is unreadable. For example, the programs that your computer runs are stored in a form that is readable only by the computer. Some files contain only text, some contain only unreadable data, and some contain both.

Because you perform different tasks with different types of files, it is important to be able to recognize five types of files and what they are used for.

Program Files

Program files contain the programs that your computer runs. All your applications are contained in program files. The files that contain programs always end with the letters .EXE. Lotus® 123®, for example, is stored in a file called 123.EXE.

The MS-DOS commands are also computer programs stored in program files. The files that contain commands end in .COM to distinguish them from other programs. Internal MS-DOS commands are stored together in a program file called COMMAND.COM.

In Chapter 9, "The Shell Program Manager," you'll learn how to use the MS-DOS Shell to organize and run your program files.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Specialized Data files

Many programs produce their own kinds of files that contain codes understandable only to the program that created them. These files may contain no text, some text, or mostly text.

For example, when you create a spreadsheet, the spreadsheet program saves the spreadsheet in a file that only it can read. Database programs and many computer games also produce specialized data files. Sometimes a program assigns a specific file extension to the files it creates. For example, Microsoft Word assigns the .DOC extension to its document files.

Unformatted Text Files

Unformatted text files contain only text. Almost all computer programs, including MS-DOS 5.0, represent text using a system called the American Standard Code for Information Interchange (ASCII). Often, files of this type have the .TXT file extension. If you use MS-DOS to work directly with text files, the files must contain only unformatted ASCII characters.

Formatted Text Files

Like unformatted text files, formatted text files use ASCII characters. However, formatted text files also contain codes that only the program can understand. These special codes tell the program how to format the text.

For example, you'll notice that not all the text is formatted the same (different fonts, paragraph styles, and so forth). In addition, the text is laid out in specific way (the page number is in a certain place, there is a certain amount of space between lines, and so on). The codes that determine how the text appears are stored along with the text in a formatted text file.

Batch Files

Batch files are unformatted text files that contain MS-DOS commands. If you often type the same set of commands to start a program, you can put them into a batch file. Then, instead of typing the commands each time, you can run the batch file, which enters the commands for you. Batch files always have a .BAT file extension. For more information on batch files, see Chapter 11, "Working With Batch Files."

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Filenames

Every file has a name. The filename consists of a name and an extension. The name is always written first and the file extension is always separated from the name by a period, as in the following:

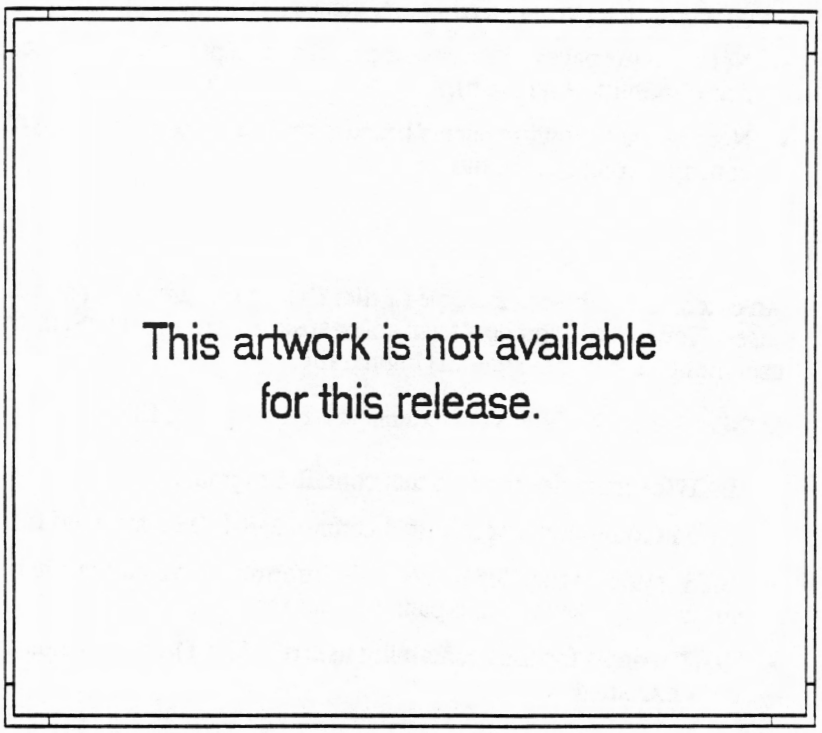

fil_1

Names

The name of a file identifies it. For example, the COMMAND.COM file contains MS-DOS commands and the MOUSE.SYS file contains information your system needs if you use a mouse. When you create a file, it's a good idea to give the file a name that clearly identifies its contents.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

The names you choose for files must:

- Be no longer than eight characters.
- Contain only the letters A through Z, the numbers 0 through 9, and the following special characters: underscore (_), caret (^), dollar sign ($), tilde (~), exclamation point (!), number sign (#), percent sign (%), ampersand (&), hyphen (-), curly brackets ({}), and parentheses ( ).
- Not contain spaces, commas, or periods (except the period that separates the name from the extension).
- Not use the following names because they are reserved by MS-DOS: clock$, con, aux, com, lpt, lst, nul, and prn.

Extensions

An extension identifies the type of file. Extensions are optional except in rare cases. However, if you don't use an extension, you, MS-DOS, or the programs you use might have trouble identifying the file.

MS-DOS uses the following extensions to identify its files:

- .EXE (executable) for files that contain programs
- .COM (command) for files that contain MS-DOS command instructions
- .SYS (system) for files that contain information about your hardware (for example your mouse and expanded memory)
- .BAT (batch) for files containing lists of MS-DOS commands that are automatically executed

When you create a file, you can choose an extension that helps you identify the file. Programs often suggest a specific extension. For example, Microsoft Word uses a .DOC extension to identify the text files that it creates. It is generally best to use the extensions suggested by your programs so that you and the program will later recognize the file.

The extensions you choose for files must be no longer than three characters. The filename restrictions about type of characters and spacing also apply to file extensions.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

File Size and Time of Creation

In addition to filenames, MS-DOS stores information about their size and the time they were created. You can see this information by entering the **dir** command. For example, MS-DOS might display the following list in response to a **dir** command:

```
 Volume in drive A is LARKA
 Volume Serial Number is 1E51-12FB
 Directory of A:\

BACKUP  COM       36880           04-07-8912:00a
DISKCOPY.COM      10396           04-03-8912:00a
FORMAT.COM 22876          04-07-8912:00a
KEYB.COM          14727           04-06-891:40a
       4 File(s)     84879 bytes
                     112384 bytes free
```

Next to the filename, MS-DOS displays the size of the file. Files are measured in bytes. One byte is the amount of space it takes to store a single character. A high-density floppy disk can store about 1.44 megabytes of information. A file's size tells you how much disk space you'll need to store the file.

To the right of the file size, MS-DOS displays the date and time the file was created or last changed. MS-DOS revises the date and time only when you change the contents of the file. The time and date do not change when you copy the file or rename it.

The size and time attributes help you keep track of your files. For example, you might want to know whether two files with different filenames contain the same information. One way to estimate if the two files are the same is to look at their sizes and dates. If the size, date, and time are the same for both files, it's likely that their contents are identical. If you want to be sure that two files are the same, use the **fc** command discussed later in this chapter.

When you are backing up files, you will often have two or more files on different disks with the same filename. You can use file sizes and dates to determine which file is the most recent.

Using MS-DOS Wildcards

If you want to do the same task on a group of files, it's inconvenient to enter the same command repeatedly with the name of each file in the group. For this reason, MS-DOS provides wildcard characters that let you specify groups of files. MS-DOS wildcards substitute for names or extensions.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

There are two wildcards:

- The asterisk (*) wildcard represents whole words or groups of characters.
- The question mark (?) wildcard represents single characters.

Using Wildcards to Specify Groups of Files

Suppose the disk in drive A contains a portion of the MS-DOS command files. You would use the following **dir** command to display a list of all files on the disk:

```
dir a: /w
```

You could also display all the files on the disk with this command:

```
dir a:*.* /w
```

The *.* combination tells MS-DOS to display file regardless of their names or extensions. When you enter either of these commands, MS-DOS displays a list of files like the one shown below:

```
 Volume in drive A is LARKA
 Volume Serial Number is 1E51-12FB
 Directory of A:\

AUTOEXEC.BAT       BACKUP.COM      COMMAND.COM     CONFIG.SYSCOUNTRY.SYS
DISKCOPY.COM       DISPLAY.SYS     EGA.CPI FDISK.EXE       FORMAT.COM
KEYB.COM   KEYBOARD.SYS    LCD.CPI MODE.COMREPLACE.EXE
RESTORE.COM        SELECT.COM      SELECT.HLP      SELECT.PRTSELECT.DAT
SELECT.EXE SYS.COM, XMA2EMS.SYS
       23 File(s)     566862 bytes
                       77824 bytes free
```

You can use the MS-DOS wildcards to display selected groups of files from this list. For example, to see only files with the .COM extension, enter the following directory command:

```
dir a:*.com /w
```

MS-DOS lists the program files that have the .COM file extension:

```
 Volume in drive A is LARKA
 Volume Serial Number is 1E51-12FB
 Directory of A:\

BACKUP.COM COMMAND.COM     DISKCOPY.COM    FORMAT.COM      KEYB.COM
MODE.COM   RESTORE.COM     SELECT.COM      SYS.COM
        9 File(s)     197439 bytes
                       77824 bytes free
```

To see only files with the name SELECT, you would enter the following directory command:

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

```
dir a:select.* /w
```

MS-DOS lists the files with the name SELECT, regardless of their extensions:

```
 Volume in drive A is LARKA
 Volume Serial Number is 1E51-12FB
 Directory of A:\

SELECT.COM SELECT.HLP      SELECT.PRT      SELECT.DAT      SELECT.EXE
       5 File(s)     151772 bytes
                      77824 bytes free
```

In addition to representing entire names or extensions, the asterisk (*) wildcard can substitute for parts of a name or extension. For example, to see files whose names begin with the letter C, enter the following command:

```
dir a:c*.* /w
```

MS-DOS lists files whose names start with this letter regardless of the rest of the name or the extension:

```
 Volume in drive A is LARKA
 Volume Serial Number is 1E51-12FB
 Directory of A:\

COMMAND.COM        CONFIG.SYS      COUNTRY.SYS
       3 File(s)      50459 bytes
                      77824 bytes free
```

If you use the asterisk wildcard to copy or delete files, be careful you don't specify a group of files instead of a single file. For example, if you have a file called MYTES.TXT and another named MYSALE.TXT, both will be copied to drive A by the following command:

```
copy my*.txt a:
```

Unlike the asterisk (*) wildcard, which subsitutes for any or all characters in a name or an extension, the question mark (?) wildcard represents single letters. For example, to list the files that have up to three-letter names, enter the following command:

```
dir a:???.* /w
```

MS-DOS lists files with up to three-letter names, regardless of the actual name or extension:

```
 Volume in drive A is LARKA
 Volume Serial Number is 1E51-12FB
 Directory of A:\

SYS.COM    EGA.CPI LCD.CPI
       3 File(s)      71227 bytes
                      77824 bytes free
```


niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Using Wildcards to Match Files

You can use wildcards to match one file or group of files with another. For example, to make all the files on drive A with a .BAK extension have a .BAK extension you could use the following **ren** (Rename) command:

```
ren *.bat *.bak
```

MS-DOS uses the first wildcard differently from the second. It uses the first to find all files that have a .BAT extension; it uses the second to create a name that matches the old name of each .BAT file.

To copy files on drive A that have names beginning with F and .BAT extensions to files on drive B with identical names but .BAK extensions, you could use the following **copy** command:

```
copy a: f*.bat b:*.bak
```

Displaying Text Files

In Brief

To see the contents of a file, use the **type** command. For example, the following command displays the LIST.TXT file in drive B:

```
type b:list.txt
```

Use the **type** command to look at the contents of files that contain text. (You can look at the contents of other kinds of files too. However, only the text will be readable.) When you enter the **type** command, MS-DOS displays the entire file on your screen. You cannot change the text or display only a portion of the file.

For example, you can use the **type** command to see the contents of the AUTOEXEC.BAT file. AUTOEXEC.BAT is the batch file that tells MS-DOS what to do when you start your system. If you have a hard disk, you'll find the AUTOEXEC.BAT file in the root directory of drive C. If you have a floppy disk system, you'll find it on the disk you use to start your system.

With a floppy disk, you can display the AUTOEXEC.BAT file by putting the disk you use to start your system in drive A and entering the following command:

```
type a:autoexec.bat
```

With a hard disk, enter this command:

```
type c:\autoexec.bat
```


niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

MS-DOS displays the entire file. If a file contains more information than will fit on the screen, MS-DOS scrolls the text more quickly than you can probably read it.

TIP To temporarily pause the display of a file, press CTRL+S or the key labeled PAUSE while the file is scrolling. The display will stop scrolling until you press any key. You can also use the **more** command to display one screen of text at a time.

If you accidentally tell MS-DOS to display a file that is very long, or of the wrong sort, enter CTRL+C or CTRL+BREAK to cancel the **type** command rather than waiting for it to finish displaying the file.

Shell ▶ **To display a file:**

1. Select the file you want to see from a file list on the File Manager screen.
2. Choose View from the File menu.

   MS-DOS displays the File View screen with the file you selected.
3. Use the PAGE UP and PAGE DOWN keys, or the ARROW keys, to view the contents of the file.

   Press F9 to switch between viewing the file as ASCII text and as hexadecimal code.
4. Press ESC when you are finished viewing the file.

Copying Files

The **copy** command is your primary tool for organizing and making copies of files. With the **copy** command you can:

- Copy a file from one directory or disk to another.
- Copy a group of files by using the MS-DOS wildcards.
- Rename files as you copy them.
- Combine two or more files into a single file.

For information about copying entire disks, see section XX in Chapter 7, "Managing Disks."

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

CAUTION When you use the **copy** command, be sure you avoid inadvertently destroying a file by copying over it. For example, if you copy a file called SCORES.DAT to a directory that already has a file by that name, MS-DOS replaces the existing file with the copy.

Copying Single Files

In Brief

To copy a file to another disk or directory, use the **copy** command. For example, the following command copies the PROB.DBS file from drive A to drive B:

```
copy a:prob.dbs b:
```

When using the **copy** command, you type the location and filename of the file you want to copy from, followed by the location and filename of the file you want to copy to. The first file is called the *source* file and the second file is called the *destination* file.

For example, to copy the OUTGO.XLS file from drive A to drive B, enter the following command:

```
copy a:outgo.xls b:outgo.xls
```

MS-DOS makes a copy of the OUTGO.XLS file on drive A and puts it on drive B in a file with the same filename. If you want the source and destination files to have the same filename, you can omit the destination file. For example, the following command does the same as the previous example:

```
copy a:outgo.xls b:
```

As MS-DOS copies a file, it displays the filename on your screen. If you don't use wildcards to copy files, MS-DOS displays a message that tells you how many files were copied, as in the following:

```
A:OUTGO.XLS
 1 File(s) copied
```

If you decide after entering the command that you don't want to copy the file, you can cancel the command while it is in progress by pressing CTRL+C.

When MS-DOS can't find the file you want to copy, it displays a "File Not Found" message. Check to see that you typed the filename correctly and that the file is in the correct directory.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Copying a Group of Files with Wildcards

In Brief

To copy a group of files from one disk or directory to another, use the copy command with wildcards. For example, the following command copies all the files with a .DBS extension from the current directory to drive B:

```
copy *.dbs b:
```

Suppose you have a number of files on drive A that you designated as temporary by giving them a .TMP file extension (for example, PLACE.TMP, GUESTS.TMP, TASKS.TMP, and so forth). If you want to copy these files to a disk in drive B, you can use the following command:

```
copy a:*.tmp b:*.tmp
```

DOS copies all the files with the .TMP extension to the disk in drive B.

You might have a group of files with filenames that differ only slightly. To copy them you can use the question mark (?) wildcard. For example, suppose you created four reports called JAN1RPT.DOC, JAN2RPT.DOC, JAN3RPT.DOC, and JAN4RPT.DOC and stored them on the disk in drive A. To transfer the files to drive B, you could use the following command:

```
copy a:jan?rpt.doc b:jan?rpt.doc
```

DOS copies the files on drive A that have seven letter names that begin with the letters JAN, end with the letters RPT, and have a .DOC extension.

If the disk you are copying to runs out of space, MS-DOS stops copying and lists the files that were copied. For example, if the disk in drive B ran out of room after two of the four .DOC files were copied, you would see a display like this:

```
JAN1RPT.DOC
 JAN2RPT.DOC
 JAN3RPT.DOC

Insufficient disk space 3 File(s) copied
```

To verify that a copy is an exact duplicate of the original, use the /v switch. For example, to make sure that the four .DOC files in the previous example are copied accurately to drive B, add the /v switch to the end of the command:

```
copy a:jan?rpt.doc b:jan?rpt.doc /v
```

MS-DOS rereads the information it copies to make sure that it matches the original exactly. If there are no differences, MS-DOS displays a message verifying that the copy is error-free. Using the /v switch will slow down your system.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Renaming as You Copy

In Brief

To rename a file as you copy, specify the new name as in the following command:

```
copy prob.dbs b:noprob.dbs
```

If you want to assign a new name to a file you are copying, specify the new filename as the destination file. (If you want to rename a file without making a copy, use the **rename** command discussed later in this chapter.)

For example, to copy the file OUTGO.XLS from drive A to drive B and rename it EXPEND.XLS on the disk in drive B, use this command:

```
copy a:outgo.xls b:expend.xls
```

You can rename groups of files by using wildcards. If you want the .TMP files on drive A to have an .OLD file extension on drive B, use the following command:

```
copy a:*.tmp b:*.old
```

You can copy a file to the same directory if you rename the file. If you don't rename the file when copying to the same directory, MS-DOS displays the following message:

```
File cannot be copied onto itself
 0 File(s) copied
```

Combining Files with the Copy Command

In Brief

To combine two or more files into a single file, include a plus sign (+) between the files you want to combine as in the following command:

```
copy prob.dbs + dob.dbs probdob.dbs
```

You can use wildcards to combine groups of files:

```
copy *.dbs all.dbs
```

You can use the **copy** command to combine two or more unformatted text files into a single file. For example, the following command joins the file A:SCENE1.TXT and A:SCENE2.TXT into a new file called B:ACT1.TXT:

```
copy a:scene1.txt + a:scene2.txt b:act1.txt
```

MS-DOS joins the files in the order you type them. In this example, MS-DOS adds SCENE2.TXT to the end of SCENE1.TXT.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

If you don't specify a destination file, MS-DOS replaces the first file you typed with the combined file. For example, to include the SCENE3.TXT file at the end of the ACT1.TXT file, you would enter this command:

```
copy act1.txt + scene3.txt
```

Copying from the Keyboard and to the Printer

In Brief

To copy text from the keyboard to a printer, first create a text file using the **copy** command followed by the word CON, as in the following example:

```
copy con prob.dbs
```

To print the file, copy it to the port to which your printer is attached, as in the following command:

```
copy prob.dbs lpt1
```

You can use the **copy** command to copy from your keyboard to a file and to print the file. To copy from your keyboard, specify CON as the source file and a filename as the destination file. In effect, your keyboard becomes the source file. For example, the following command allows you to type directly into the NOTE.TXT file on drive A:

```
copy con a:note.txt
```

The command tells MS-DOS to copy whatever you type on the keyboard to the file A:NOTE.TXT. When you enter the command you'll notice that MS-DOS moves to the next line and displays a cursor with no command prompt. While the command is active, MS-DOS copies what you enter at the keyboard directly into the file. As usual, if A:NOTE.TXT does not exist, MS-DOS creates it. If it does exist, what you type replaces what is already in the file.

When you are finished typing into the file, press CTRL+Z to close the file and display a command prompt.

NOTE You can use the command editing keys described in Chapter 8,"Advanced Command Techniques," to edit the line of text you are typing, but after you press ENTER you can't change text on previous lines.

To copy a file to your printer, specify the name of the port to which the printer is attached as the destination file. (For more information about ports, see "Printing Files", later in this chapter.) For example, the following command copies the NOTE.TXT file on drive A to the printer attached to the LPT1 port:

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

```
copy a:note.txt lpt1
```

Using CON and the name of a port, you can copy directly from your keyboard to a printer, for example, to the printer attached to the LPT1 port:

```
copy con lpt1
```

When you are finished typing to the printer, press CTRL+Z to print what you have typed and display a command prompt.

Copying Files with the Shell

You can use the File Manager **copy** command to copy any number of files from one directory to another. If you have chosen Confirm on Replace from the Options menu, MS-DOS asks you to confirm the copy if you are copying over an existing file.

NOTE Do not use Program Manager **copy** command to copy files. The Program Manager command is a tool for organizing how files are displayed; it doesn't make copies on disk. For more information on using the Program Manager, see Chapter 9, "The Shell Program Manager."

Shell ▶ **To copy files:**

1. Select the file or files you want to copy from a file list on the File Manager screen.
2. Choose Copy from the File menu.

   The Copy File dialog box appears, with the filenames you selected in the From box.
3. Type the location of the directory where you want to copy your files in the To box.
4. Choose OK.

Renaming Files

In Brief

To rename a file, use the **rename** command (also called the **ren** command), as in the following example:

```
ren mytax.dat ourtax.dat
```


niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

To change the name of a file without changing its location, use the **rename** command. This command is especially helpful for organizing files. For example, suppose you have two versions of a file called PRICES.LST. The version on the disk in drive A contains last year's prices, whereas the version on drive C is current. To avoid confusion between the two files, you can use the following command to rename file that contains last years prices:

```
ren a:prices.lst prices.old
```

MS-DOS wildcards can help you rename groups of files. For example, suppose you use the .TXT extension to identify your WordPerfect® files. To rename the .TMP files discussed in the previous sections so that they become .TXT files, you could use the following command:

```
ren *.tmp *.doc
```

MS-DOS changes the file extension of each file in the current directory that has a .TMP extension (PLACE.TMP becomes PLACE.TXT, GUESTS.TMP becomes GUESTS.TXT, and so on).

Shell ▶ **To rename files:**

1. Select the file or files you want to rename from a file list on the File Manager screen.
2. Choose Rename from the File menu.

   The Rename File dialog box lists the current name of the first file you selected.
3. Type the new filename in the New name box.
4. Choose OK .

   If you selected more than one file, the Rename File dialog box asks you to rename each file separately. When all the files are renamed, File Manager is ready to accept new commands.

Printing Text Files

You can print unformatted text files from MS-DOS with the **print** command. It is generally best to print formatted text files and other specialized files from the program you used to create them. For information about formatted and unformatted text files, see "Types of Files" earlier in this chapter.

MS-DOS gives you print options that an application may lack. Unlike some applications, MS-DOS lets you start a print job and then go on to other tasks while the

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

printer prints. In addition, MS-DOS lets you specify a list of files to print so you don't have print each file separately.

Before printing, make sure your printer is properly connected to your system, that it's switched on, and that it's online. For information about readying your printer, consult your printer documentation.

Printing Files

In Brief

To print an unformatted text file from MS-DOS, use the **print** command, as in the following example:

```
print config.sys
```

If you don't specify a port, MS-DOS assumes LPT1 (also called PRN). To specify a port other than LPT1, use the **/d** switch, as in the following command:

```
print config.sys /d:com1
```

Suppose you have a file named TOGO.TXT that you want to print. If your printer is attached to the LPT1 port, enter the following:

```
print togo.txt
```

If your printer is attached to another port, add a **/d** switch to specify the port. For example, if printer output is normally directed to LPT1, use this command to send the TOGO.TXT file to a laser printer attached to COM1 port:

```
print togo.txt /d:com1
```

The **/d** switch is always separated from the name of the port by a colon (:).

To print more than one file at a time, you can type the various filenames separated by spaces, or you can use the MS-DOS wildcards described earlier in this chapter.

Shell ▶ **To print files:**

1. Select one or more files from a file list on the File Manager screen.
2. Choose Print from the File menu.
   The Shell adds the files to the print queue.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Using the Print Queue

In Brief

To view the contents of the print queue, use the **print** command with no parameters as in the following example:

```
print
```

To stop printing and empty the print queue, use the /t switch, as in this command:

```
print /t
```

The MS-DOS print queue is a list of the files waiting to print. The file at the top of the queue is the one currently being printed. MS-DOS adds your files to the print queue when you use the **print** command. After the first file is finished printing, MS-DOS advances the printer paper to the next sheet and begins printing the second file.

To see what's in the print queue, enter a **print** command with no parameters:

```
print
```

MS-DOS lists the files in the queue and tells you which one is currently printing.

To cancel all printing and empty the print queue, use the /t switch:

```
print /t
```

MS-DOS stops sending information to the printer. The printer will keep printing until it has used up all the information it has stored.

NOTE The print queue requires memory that MS-DOS and your applications could otherwise use. Therefore, using the print queue may affect the efficiency of your system. To print without the print queue, use the **copy** command described earlier in this chapter.

Deleting Files

As you work with MS-DOS, you'll occasionally want to clean out files that are no longer useful. You can delete a single file, selected groups of files, or all files in a directory or on a disk. Once you've deleted them, files are irretrievably gone. Be sure that the files you specify for deletion are indeed the ones you want to throw away.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Deleting Single Files

In Brief

To remove a file from a disk permanently, use the **del** command (also called the **erase** command), as in the following example:

```
del a:temp.exe
```

You delete a single file by entering the **del** command, followed by the location and name of the file you want to delete. For example, to delete the TEST.TMP file on the disk in drive B, enter the following command:

```
del b:test.tmp
```

MS-DOS permanently removes the file from the disk. Instead of **del**, you can enter **erase**. For instance, the following is equivalent to the previous example:

```
erase b:test.tmp
```

If you add the **/p** switch to the **del** command, MS-DOS gives you a chance to check your filename, as in the following message:

```
TEST.TMP,  Delete (Y/N)?
```

Enter **y** if you want to delete the specified file or **n** if you want to cancel the command.

Deleting Groups of Files

In Brief

To delete a group of files use the **del** command with wildcards as in the following example:

```
del temp.*
```

You can use MS-DOS wildcards to delete groups of files that have similar filenames. For example, if you want to delete files from their original location after you copy them, use the asterisk (*) wildcard. For example, the following command deletes all files with the .TMP file extension on the disk in drive A:

```
del a:*.tmp
```

Before using wildcards to delete a group of files, it's a good idea to use the **dir** command to display the files that match your wildcard description. Developing this habit may prevent you from accidentally deleting files you intended to keep. For more information about the **dir** command, see Chapter 6, "Working with Directories."

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Clearing a Directory

In Brief

To delete all files in a directory, use the **del** command with the "*.*" wildcard combination as in the following example:

```
del b:*.*
```

If you want to clear a directory that contains files you no longer need, you can delete all files by entering the following command:

```
del a:*.*
```

In response to any "*.*" wildcard entry, MS-DOS asks you to confirm that you want to delete all files. If you are sure you want to throw away the files, enter y. As a result, MS-DOS deletes every file in the current directory of the disk in drive A.

Deleting Files with the Shell

You can use the Delete command in the Shell to delete one or more files.

Shell ▶ **To delete files:**

1. Select the file or files you want to delete.
2. Choose Delete from the File menu.

   If you're using the Program Manager, the Delete Item dialog box appears.

   If you're using File Manager, the Delete File dialog box appears.
3. Choose OK to delete the files.

   If you are using File Manager and have chosen Confirm on Delete from the Options menu, MS-DOS prompts you for confirmation before it deletes each file.

Moving Files

In Brief

To move a file from one disk or directory to another, use the **copy** command, then the **del** command, as in the following example:

```
copy a:outgo.xls b:
del a:outgo.xls
```


niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Using the copy and del commands, you can move one or more files from one directory or disk to another. Moving files requires you first to copy them to their new location. After copying the files. delete them from their original directory. For example, to move the group of .TMP files discussed earlier from the disk in drive A to the disk in drive B, use the following two commands:

```
copy a:*.tmp b:*.tmp
del a:*.tmp
```

Shell ▶ **To move files:**

1. Select the file or files you want to move from a file list on the File Manager screen.
2. Choose Move from the File menu.

   The Move File dialog box appears, listing the file or files you selected in the From box.
3. In the To box. type the location of the directory where you want to move the file. If you want to rename the file in its new location, type the new filename after the location of the directory.
4. Choose OK .

Comparing Files

In Brief

To see if two files or groups of files have the same contents, use the fc command as in the following example:

```
fc /a a:mytax.dat b:
```

MS-DOS compares the files and displays differences.

Comparing file size and time of creation is an approximate way of determining whether or not two files are identical. To get a precise comparison of two files, use the fc command. For example, suppose you have an unformatted text file called FOODPRP.TXT on two disks. To find out if the files are exactly the same, put one disk in drive A and the other in drive B and enter this command:

```
fc /a a:foodprp.TXT b:
```


niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

MS-DOS starts at the beginning of the two files and compares each byte. When it finds a difference, MS-DOS displays the line that begins a set of differences, an ellipsis, and the line that ends the set of differences, as in the following:

```
*****foodprp.txt
Our expected revenues for the month of January is expected to rise
...
when the results are not yet certain.
*****foodprp.txt
Our expected revenues for January are less than projected
...
when the results are not yet certain.
*****
```

For more information on the **fc** command, see the *MS-DOS 5.0 User's Reference.*

Viewing and Changing File Attributes

Every file has four qualities associated with it that help you back it up and protect it from being seen or changed. These qualities, called file attributes, do the following:

- The archive attribute (**a**) is used with the **backup** and **xcopy** commands to control which files are backed up. See Chapter 7, "Managing Disks," for a discussion of backing up files.
- The read-only attribute (**r**) protects a file by preventing it from being changed or deleted. When a file has this attribute, you can look at the file but you cannot delete it, rename it, or change its contents. You'll see how to give a file this attribute later in this section.
- The hide attribute (**h**) tells MS-DOS not to display a file in directory lists. The file remains in a directory, but cannot be used unless you know its filename. This attribute is useful if you are working on sensitive files that people should not see. To learn more about the hide attribute, see the **attrib** command in the *MS-DOS 5.0 User's Reference.*
- The system attribute (**s**) tells MS-DOS to make a file a system file. Files with the system attribute are not shown in directory listings. To learn more about the system attribute, see the **Attrib** command in the *MS-DOS 5.0 User's Reference.*

NOTE No files are hidden from the file list in the Shell File Manager screen.

t-mark • Wed May 16 18:09:40 1990 • MICROSOFT CONFIDENTIAL

Viewing File Attributes

In Brief

To view the access and backup attributes of a file, use the **attrib** command as in the following example:

```
attrib outgo.xls
```

MS-DOS displays the filename and the attributes of the file.

To see a file's attributes, enter the **attrib** command followed by the filename. For example, the following command shows you the attributes of the CONFIG.SYS file on drive A:

```
attrib a:config.sys
```

MS-DOS displays up to four attributes in front of the filename. For example, if CONFIG.SYS has the archive and read-only attributes, MS-DOS displays the following:

```
a r config.sys
```

You can see the attributes for a group of files using the MS-DOS wildcards. This command shows you the attributes of all files in the root directory of drive C:

```
attrib c:\*.*
```

Shell ▶ **To view the attributes of a file:**

1. Select the file from a file list on the File Manager screen.
2. Choose Show Information from the Options menu.

   MS-DOS displays the Show Information dialog box, which lists the file's attributes along with other information about the file.
3. Choose OK when you are finished viewing the attributes.

Changing a File Attribute

In Brief

To assign or remove an attribute from a file, include the attribute's letter and a plus or minus sign respectively. For example, the following command makes the OUTGO.XLS file read only:

```
attrib +r outgo.xls
```


t-mark • Thu May 17 12:44:36 1990 • MICROSOFT CONFIDENTIAL

When you want to be sure that the contents and name of a file will not change, assign a read-only attribute to the file. For example, suppose you have spent three weeks getting your spreadsheet, GEMINI.XLS, just right. You want to let other people use it, but you don't want them to change it. To make sure that the file cannot be altered, you could put its disk in drive B and enter this command:

```
attrib +r b:gemini.xls
```

Later, if you decide that you want to change the file, you can remove the read-only attribute with this command:

```
attrib -r b:gemini.xls
```

You can use the MS-DOS wildcards to assign and remove the read-only attribute from groups of files.

For information about using other file attributes, see the *MS-DOS 5.0 User's Reference.*

Shell ▶ **To change the attributes of a file:**

1. Select the file or files you want to change from a file list on the File Manager screen.
2. Choose Change Attribute from the File menu.

   MS-DOS displays the Change Attribute dialog box.
3. Choose option 1 if you want to change attributes of each file you selected individually. Choose option 2 if you want to change the attributes of all the files at once.

   MS-DOS displays another Change Attribute dialog box that shows the file you selected and its present attributes.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

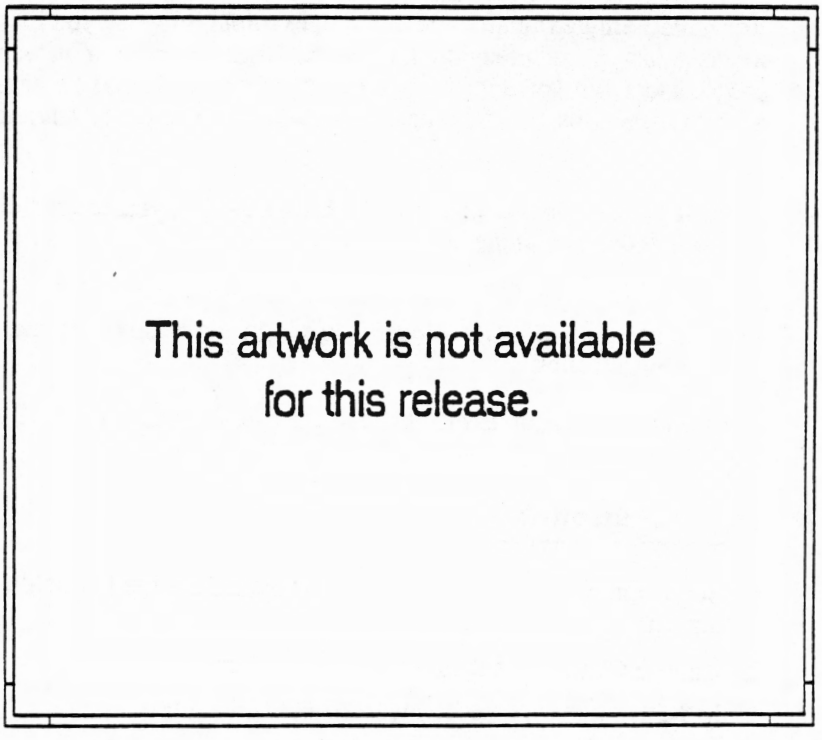

fil_2

4. Choose the attribute you want to change or assign to the file or files listed in the box.

   A mark appears next to the attribute to show that it is assigned.

   To cancel a selection, choose it again.

5. Choose OK .

Finding Text Within a File

In Brief

To display the lines of a file that contain a specified group of words, use the **find** command, as in the following example:

```
find "Error" output.txt
```

To display only the number of lines that contain the text you specify, include the /c switch:

```
find "Error" output.txt /c
```

The text you specify must be identical in capitalization and spacing to the text in the file.

If you want to search one or more files for a group of words, you can use the **find** command. For example, if your personal phone book is in the PHONE.TXT file, you can use the following command to display all lines of the file that contain the text *Area Code: 206*:

```
find "Area Code: 206" phone.txt
```

MS-DOS searches the PHONE.TXT FILE and displays each line that has the text *Area Code: 206*. You must enclose the text in quotation marks. MS-DOS finds only text that exactly matches the characters you specify, including capitalization and spacing. If the text in the file has formatting codes (for example, if the words Area Code are underlined), MS-DOS won't match the specified text.

You cannot use wildcards to search more than one file, but you can list all the files you want to search when you enter the command. For example, the following command searches the PHONE.TXT file as well as the ADDR.TXT file:

```
find "Area Code: 206" phone.txt addr.txt
```

If you just want to know how many lines of the file contain the text, use the /c switch. For example, the following command tells you how many lines of the ADDR.TXT file contain the text *Bellerose:*

```
find "Bellerose" addr.txt /c
```

If you want the results of the find command to be stored in a file rather than displayed on the screen, you can use the greater-than sign (>) to redirect the output. For example, the following command stores the result of the find command in the NWEST.NUM file:

```
find "Area Code: 206" phone.txt >nwest.num
```

For information on using redirection characters, see Chapter 8, "Advanced Command Techniques."

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Using the Shell to Search for Files

Using the Shell File Manager, you can locate files with the Search command. The Search command searches the directory selected or the entire current disk for the file or files you specify. Once you have located the files, you can use any of the commands on the File menu to work with the files you have found.

Shell ▶ **To search for a file:**

1. Choose Search from the File menu on the File Manager screen.
   MS-DOS displays the Search File dialog box.

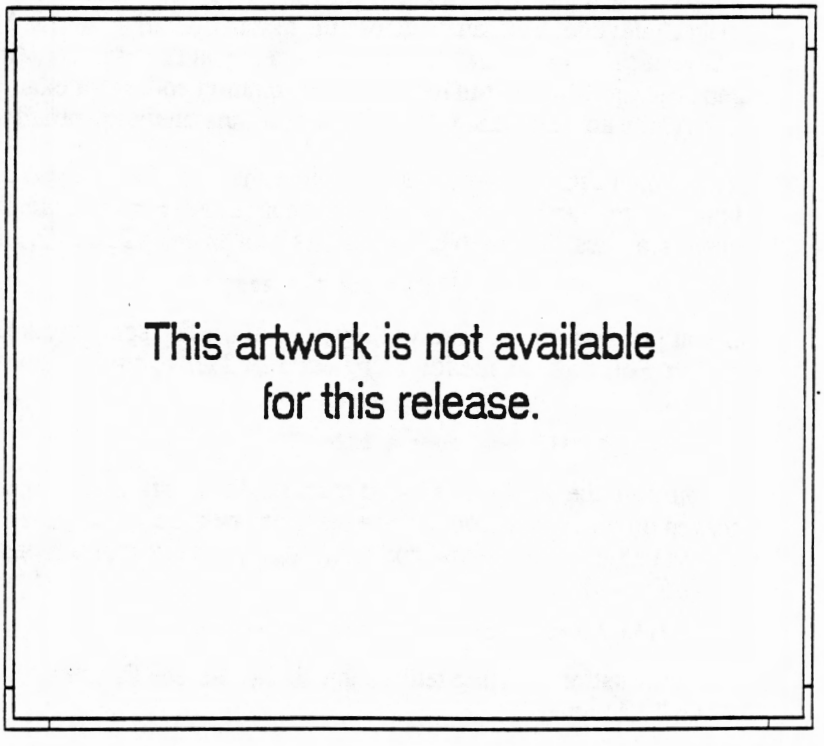

fil_3

2. Type the name of the file you want to find.

   You can search for a single file by typing its name or you can use MS-DOS wildcards to search for files with similar names.

3. Clear the Search Entire Disk check box if you want MS-DOS to search only the current directory for the files.

   If the Search Entire Disk option is selected (if the box preceding it contains an X), MS-DOS searches through every directory on the currently selected disk. If you have two directories displayed and two disks selected, MS-DOS searches the disk selected on the upper half of the screen.

4. Select OK to begin searching for the file or files you specified.

   MS-DOS displays a list of files that match the one you specified. You can select files from this list and work with them using the commands on the File menu.

Using the Shell to Get Information About a File

When you have one or more files selected from a file list in the File Manager, you can display the Show Information dialog box to get information about the file, its directory, and its disk.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

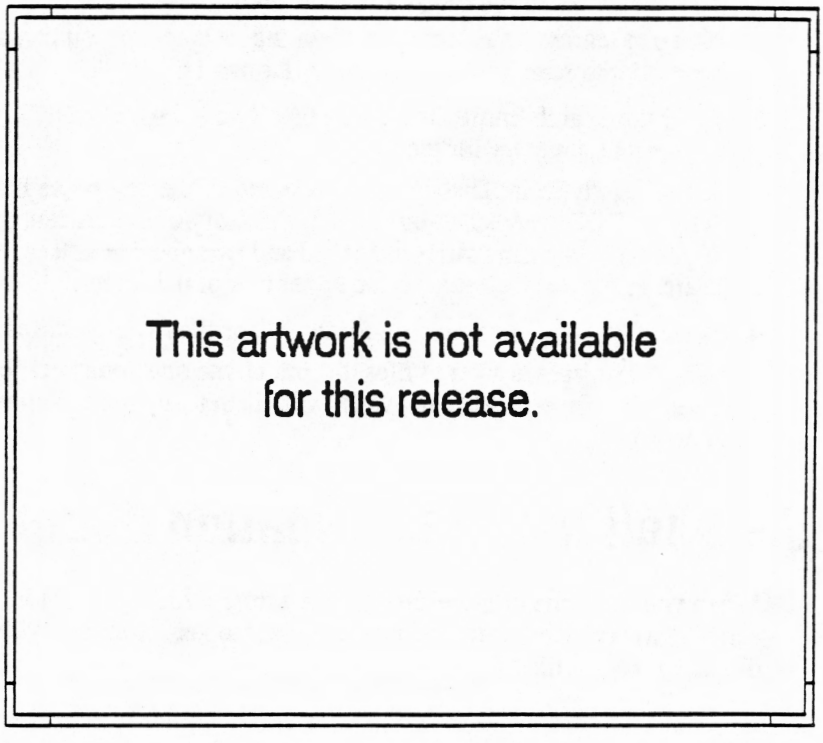

fil_4

The File section of the box shows the filename and attributes of the file you selected. The attributes are (a) archive, (r) read-only, and (h) hidden file. For more information about file attributes, see the "MS-DOS 5.0 User's Reference."

The Selected section of the box shows the number of selected files on the current disk and their combined total size. If you have worked with two different disks, the Selected section has two columns: one for the most recently selected disk, and one for the previously selected disk.

The Directory section of the box lists the name, size, and number of files in the directory that contains the file you selected.

The Disk section of the box lists the name, size, amount of available space, and the number of files and directories on the disk that contains the file you selected.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Shell ▶ **To get information about a file:**

1. Select the file you want information about from the file list on the File Manager screen.
2. Choose Show Information from the Options menu.

   MS-DOS displays the Show Information dialog box.
3. Choose Cancel when you are finished viewing information.

Using the Shell to Associate a File with a Program

If you have a set of files that you often use with a particular program, you can save time with the Associate command in the File menu. This command associates one or more file extensions with a program. When you open a file that has one of the extensions you specified in the Associate command, MS-DOS runs the associated program automatically, and the file is loaded into the program.

For example, suppose you normally do word processing with WordPerfect, which has a program file named WP.EXE. If you assign a .TXT extension to the documents you create with WordPerfect, you can use the Associate command so that MS-DOS automatically starts WordPerfect when you open a .TXT file.

You can associate up to 20 different file extensions with one program. When you choose a file that has any of the extensions, the program runs and loads the file. You can associate an extension with only one program at a time. For example, you can't associate the extension .TXT with WordPerfect and another word processing program at the same time.

Shell ▶ **To associate one or more files with a program:**

1. Select the program file you want to associate with the file extension (or extensions) from the file list.
2. Choose Associate from the File menu.

   The Associate File dialog box appears.
3. In the box, type the file extension (or extensions) that you want to associate with the program.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

NOTE Don't type a period at the beginning of the extensions you type in the box. To associate more than one extension with a program, type the extensions with one or more blank spaces between each one.

4. Choose ENTER.

The program is now associated with the file extension or extensions you specified.

If you occasionally want to run a file with a program other than the one it is associated with, use the Open command from the File menu to specify a new program.

Shell ▶ **To run an associated file with a different program:**

1. Select the file you want to use from the file list.
2. Choose Open from the File menu.
   The Open File dialog box appears.
3. Type the path and filename of the new program you want to run with the file.
4. Choose ENTER.

If you've associated a program with a file extension, you can remove the association.

Shell ▶ **To delete the association between a program and a file:**

1. Select the program.
2. Choose Associate from the File menu.
3. When the Associate File dialog box appears, erase the file extension or extensions you no longer want to associate with the program.
4. Choose ENTER.

niklasb • Wed May 16 16:32:14 1990 • MICROSOFT CONFIDENTIAL

Chapter 6

Working with Directories

6

You can think of your disks as cabinets where you keep your files. Like a file cabinet, your disks have folders that group the files that belong together. These folders are called *directories*. You use directories to organize files. When you have a number of files that you want to keep together, you can put them in their own directory.

In a file cabinet, when a folder contains so much information that you can no longer easily find what you want, you subdivide it. For example, if your sales folder becomes large, you might add folders to separate the files by month. In the same way, when your directories get too large, you can divide them into subdirectories.

Understanding Directories

Directories provide a way of organizing files into groups. Directories are most important when you use a hard disk. If you use only floppy disks, you can usually keep files separate by putting them on different disks. With a hard disk, which may contain as much information as dozens of floppy disks, it becomes necessary to organize files into categories so you can find them more easily. A hard disk with no directories is like a large file cabinet with no dividers.

The Directory Tree

Every disk has at least one directory. When you format a floppy or hard disk, MS-DOS creates a directory where all other files and directories will be stored. This directory is called the *root directory*.

You create subdirectories of the root directory to organize and separate files. For example, you could put all of your Microsoft Paint files in one directory and all of your Microsoft Word files in another directory. You can picture this directory structure as an upside-down tree with 2 branches:

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

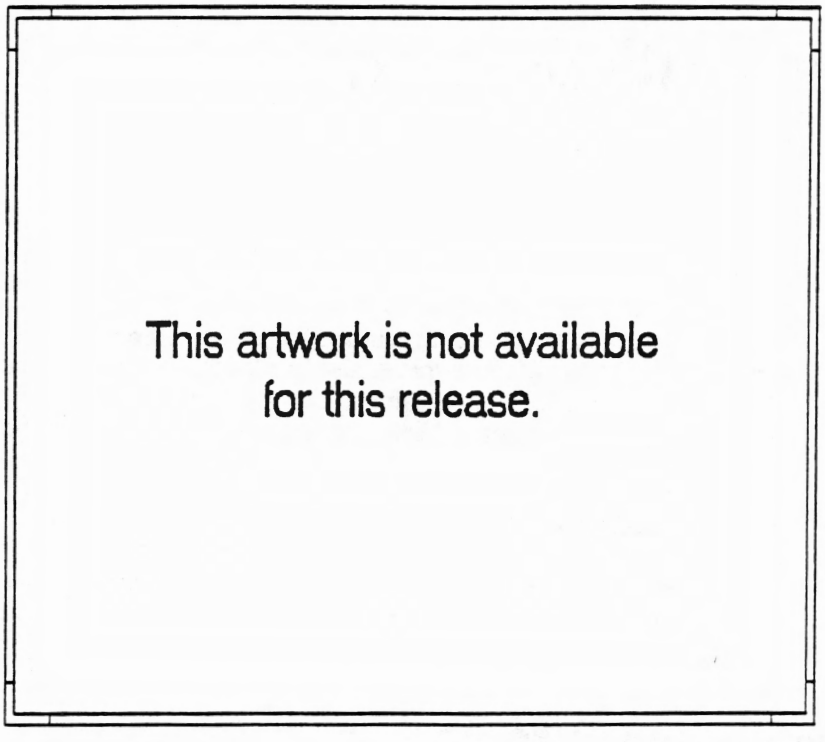

dir_1

You can create subdirectories within subdirectories to further organize your files. For example, suppose you use Microsoft Paintbrush for work, school projects, and personal projects. To keep your files separate, you can create three subdirectories in the Paintbrush directory. You can put your work files in the WORK directory, your school files in the SCHOOL directory, and your personal files in the HOME directory. You can picture the resulting directory structure as a tree with two main branches and three sub branches:

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

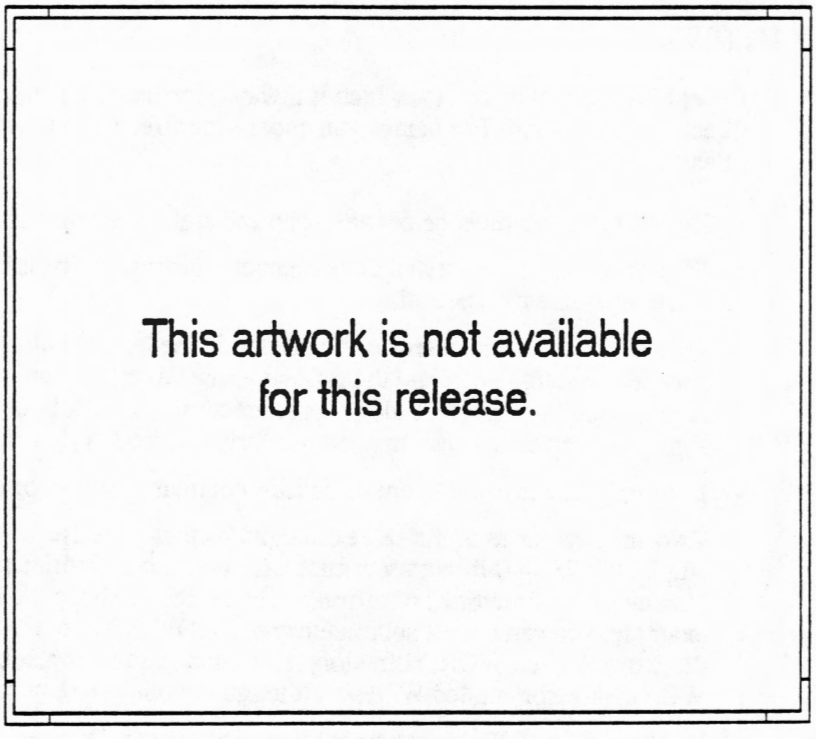

dir_2

You can continue to add directories at any level of the structure until your files are organized to your satisfaction. In this way, you create a directory tree that lets you quickly locate the files you need.

In general, there can be no more than 512 files and directories in the root. In other directories, you can have as many files and directories as you like. However, MS-DOS runs slower if there are more than about 150 files and subdirectories in a directory.

Strictly speaking, all directories other than the root directory are subdirectories. However, it is usually most convenient to use the term *directory*. In this manual, the term *subdirectory* is used only to emphasize the relationship between two directories. Subdirectories are sometimes called *child directories*, and a directory that contains subdirectories is sometimes called the *parent directory*.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Directory Names

Except for the root directory, which is always represented by a backslash (\), each directory has a name. The names you choose for directories must follow these rules:

- Directory names must be between one and eight characters long.
- Directory names can have a three-character extension that is separated from the directory name by a period.
- Directory names and extensions can contain the letters A through Z, the numbers zero through nine, and the following special characters: underscore (_), caret (^), dollar sign ($), tilde (~), exclamation point (!), pound sign (#), percent sign (%), ampersand (&), hyphen (-), curly brackets ({}), and parentheses ( ).
- Directory names cannot contain spaces, commas, periods, or backslashes.
- Two subdirectories of the same directory cannot have the same name. For example, the WORD directory cannot have two subdirectories named FILES. However, subdirectories of different directories can have the same name. For example, you can have a subdirectory named FILES in both the PBRUSH directory and the WORD directory. (You can even have a subdirectory of the WORD directory called WORD, although it would be very confusing.)
- It is best to keep directory names short because MS-DOS will not recognize pathnames that are more than 64 characters long.

In addition its own name, the current directory is called "." (period) by MS-DOS. The parent directory of the current directory is called ".." (double period). MS-DOS recognizes these names if you substitute them for the real names of either of these directories.

Paths and Pathnames

The *path* is the location of a file within the directory tree. You can think of it as the route that MS-DOS must travel, starting at the root, to get to files in the directory. For example, suppose that the hard disk in drive C has this directory tree:

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

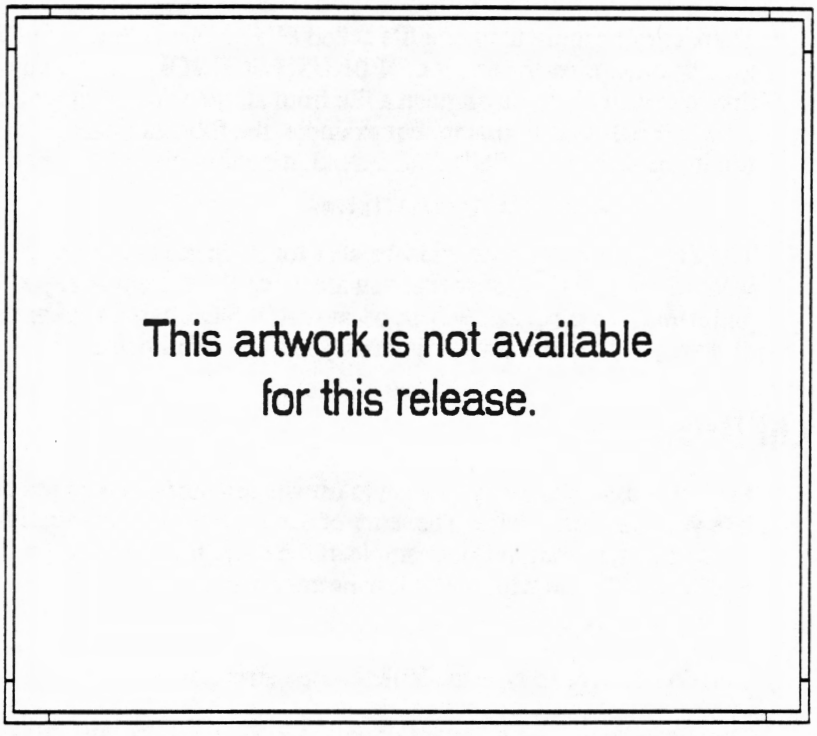

dir_3

To get to files in the FINAL directory, MS-DOS must go into the following directories: Root (\), PBRUSH, SCHOOL, and FINAL.

In MS-DOS commands, you name the path in the following way:

```
\pbrush\school\final
```

This is the path of the FINAL directory. The first backslash represents the root directory; the other backslashes separate the various directory names.

If you want MS-DOS to find the FINAL directory, you type the path of the directory. To specify the FIG1.MSP file in the \PBRUSH\SCHOOL\FINAL directory, you add another backslash and the filename to the path:

```
\pbrush\school\final\fig1.msp
```


niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

There may be more than one file called FIG1.MSP in other directories and there may be other directories called \PBRUSH\SCHOOL\FINAL on other disks. For this reason, to fully distinguish a file from all other files, you must add a drive letter to the path and filename. For example, the full designation for the FIG1.MSP file in the \PBRUSH\SCHOOL\FINAL directory on the disk in drive C is:

```
c:\pbrush\school\final\fig1.msp
```

The drive, directory path and filename for a file are the file's *pathname*. If you want to be absolutely sure that you are using the correct file, you can always type pathname of the file. However, because MS-DOS has a current drive and a current directory, you don't always have to type a file's full pathname.

The Current Drive

MS-DOS assumes that you want to use the directory tree on the current drive unless you tell it otherwise. The letter of the current drive is usually shown as part of the command prompt. For example, if the current drive is A, you can delete the A:\FIG1.MSP file with the following command:

```
del fig1.msp
```

You do not have to type the letter of the current drive.

There can be only one current drive at a time. To work with files on a drive other than the current one, you can either type the other drive letter or change the current drive by entering a new drive letter followed by a colon (:). For example, to make drive A current, enter A:.

The Current Directory

One directory on each disk in your system is current. Often MS-DOS displays the path of the current directory as part of the command prompt. Like the current drive, you don't have to type the path of the current directory because MS-DOS assumes you want to work with it. For example, if C is the current drive and \PBRUSH\SCHOOL\FINAL is the current directory, you can delete the C:\PBRUSH\SCHOOL\FINAL\FIG1.MSP file with this command:

```
del fig1.msp
```

Because C is the current drive and \PBRUSH\SCHOOL\FINAL is the current directory, you don't have to type them.

Every drive has a current directory. Even if a drive is not current, it still has a current directory. For example, if the \PBRUSH\SCHOOL\FINAL directory is current on drive C and the \FIGS directory is current on drive A, you could use the

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

following command to copy the FIG2.MSP file from A:\FIGS to C:\PBRUSH\SCHOOL\FINAL:

```
copy a:fig2.msp c:
```

Unless you tell it otherwise (by typing a specific path), MS-DOS assumes that you want to work with the current directory on each drive. When you start your system, all of the current directories are set to the root directories of the drives in your system.

To work with files in a directory that is not current, you have three choices:

- You can type the path of the other directory.
- You can make the other directory current using the **cd** command. This command is described in "xx," later in this chapter.
- You can include the path of the other directory in the **path** command. This command is described in "xx," later in this chapter.

If you want to type the path of another directory, you need only include the part of the path that is different from the path of the current directory. For example, if the current directory is \PBRUSH, you can enter the following command to delete the \PBRUSH\SCHOOL\FINAL\FIG1.MSP file:

```
del school\final\fig.msp
```

Because the file you want to delete is in a subdirectory of the current directory, you don't have to type the complete path. If the file is not in a subdirectory of the current directory, you have to type its entire path. For example, if the current directory is \WORD, to delete \PBRUSH\SCHOOL\FINAL\FIG1.MSP, you would have to enter this command:

```
del \pbrush\school\final\fig.msp
```

Using the Prompt Command to See the Current Directory

You can use the **prompt** command to change the command prompt so it always displays the current directory. Unless you tell it otherwise, MS-DOS uses the current drive followed by the greater than sign (>) as the command prompt. For example, the following prompt tells you that the current drive is A:

```
A>
```

You can use various options with the **prompt** command to change the way your prompt looks. For example, the following command tells MS-DOS to display the current drive and directory as the command prompt:

```
prompt $p
```


niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

If the current directory is C:\PBRUSH, MS-DOS displays this prompt:

```
C:\PBRUSH
```

The following command creates a prompt that contains the current drive and directory and a greater-than sign (>) to separate the prompt from the command you type:

```
prompt $p$g
```

If the current directory is C:\PBRUSH, MS-DOS displays this prompt:

```
C:\PBRUSH>
```

NOTE If you use **$p** to create a prompt that displays the current drive and directory, MS-DOS will check the directory after every command. This may cause a small delay if your current drive contains a floppy disk. To return the prompt to its original value (the greater-than sign (>) preceded by the current drive), enter this command:

```
prompt
```

If you change the prompt, it will return to its original form each time you start your system.

To change the prompt automatically each time you start the system, you can include a **prompt** command in your AUTOEXEC.BAT file. If your prompt contains more than just the current drive when you start your system, there is already a **prompt** command in your AUTOEXEC.BAT file. For more information, see xx.

For information about the other options you can use with the **prompt** command, see the *MS-DOS User's Reference*.

Viewing Directories

To see the files that are in any directory on any disk, you can use the **dir** command. The simplest form of the command displays a list of the files in the current directory. By adding to the command, you can tell MS-DOS to:

- Display only some of the files in a directory.
- Show the directory one screen at a time.
- Arrange the way files are displayed in the directory listing.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Displaying Whole Directories

In Brief

To view the contents of a directory, use the **dir** command. For example, the following command displays the contents of the C:\WORD directory :

```
dir c:\word
```

The **dir** command without its options lists the files in the current directory. For example, if your current directory is A:\ you can use the following command to see its contents:

```
dir
```

MS-DOS displays the following information about the A:\ directory and the files it contains:

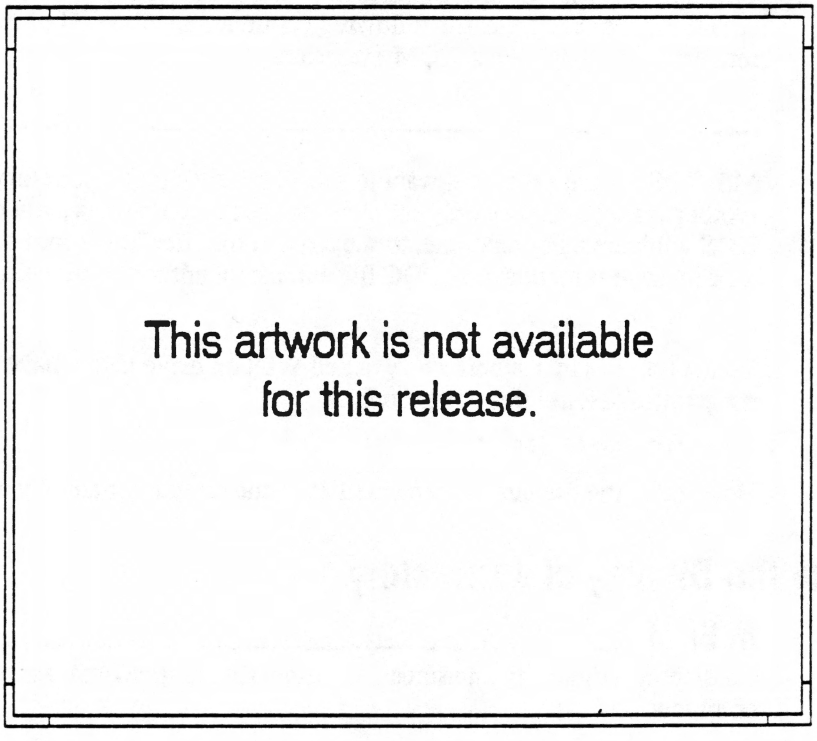

dir_4

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

For more information about each element in a directory listing, see xx. If you add the path of a directory to the command, MS-DOS displays the files in the specified directory rather than in the current directory. No matter which directory is current, the following command shows you the files in the root directory of the disk in drive B:

```
dir b:\
```

When you want to see the contents of a subdirectory, you must include the backslash that represents the root directory. For example, this command displays the files in the WIN subdirectory on drive C:

```
dir c:\win
```

Displaying Groups of Files

In Brief

To display a group of files in a directory listing, include wildcards with the **dir** command. For example, the following command displays all of the files in the current directory that have a .COM extension:

```
dir *.com
```

MS-DOS assumes that you want to see all the files in the directory unless you tell it otherwise. To display only some of the files in a directory, you can use the MS-DOS wildcards. For example, to see a list of the files in the root directory of the disk in drive B that have a .DOC file extension, enter the following command:

```
dir b:*.doc
```

To list the files in a subdirectory called WIN on drive C that have filenames beginning with JAN, use this command:

```
dir c:\win\jan*.*
```

Notice that the filename is separated from the directory name by a backslash (\).

Arranging the Display of a Directory

In Brief

To display a directory one screen at a time use the **/p** switch, as in the following command:

```
dir c:\win /p
```

To display an abbreviated directory, with only filenames listed, use the /w switch:

```
dir c:\win /w
```


niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Often a directory is too long to be displayed on a single screen. To display a directory one screen at a time, use the /p switch, as in the following command:

```
dir /p
```

After displaying the first screen of files, MS-DOS pauses. To continue the display, press any key.

If you include the /w switch with the **dir** command, MS-DOS displays only the names of the files in the directory. With this switch you can usually see all of the files on a single screen. For example, the following command displays the contents of the root directory of drive C:

```
dir c:\ /w
```

MS-DOS displays up to five columns of filenames.

Sorting a Directory Listing

In Brief

To sort the directory listing by filename (n), extension (e), date (d), or file size (s) use the /o: switch. For example, the following command alphabetizes the listing by file extension:

```
dir c:\win /o:e
```

This command alphabetizes the listing in reverse order (from Z to A):

```
dir c:\win /o:-e
```

You can tell MS-DOS to sort a directory listing by including the /o: switch. The following list shows the various ways you can sort the directory:

- /o:n alphabetizes the directory by name.
  /o:-n reverse alphabetizes the directory by name (z to a).
- /o:e alphabetizes the directory by extension.
  /o:-e reverse alphabetizes the directory by extension (z to a).
- /o:d numbers the directory by date (oldest first).
  /o:-d numbers the directory by date (youngest first).
- /o:s orders the directory by file size (smallest first).
  /o:-s orders the directory by file size (largest first).

t-mark • Thu May 17 12:49:27 1990 • MICROSOFT CONFIDENTIAL

For example, the following command displays the directory of drive B with the largest file first:

```
dir b: /o:-s
```

You can combine switches. For example, this command alphabetizes the director of C:\ and displays the filenames in five columns:

```
dir c:\ /o:n /w
```

Viewing All Directories on a Disk

In Brief

To display the relationship between a directory and its subdirectories, use the **tree** command. For example, the following command displays the relationship between the C:\WIN directory and its subdirectories:

```
tree c:\win
```

The following command uses the **/f** switch to include files in the display.

```
tree /f
```

The easiest way to see the relationship between the directories on a disk, or between a directory and its subdirectories, is to use the **tree** command. You can also see subdirectories with the **dir** command, but the **tree** command gives you more information. The **dir** command usually lists only the first level of subdirectories, while the **tree** command lists all the levels. The **dir** command displays the subdirectories along with files in a list on your screen, while the **tree** command displays the relationship between a directory and its subdirectories graphically, showing how each level fits.

For example, to see the subdirectories of the current directory, you would enter the following command:

```
tree
```

MS-DOS displays a directory tree graphic like this one:

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

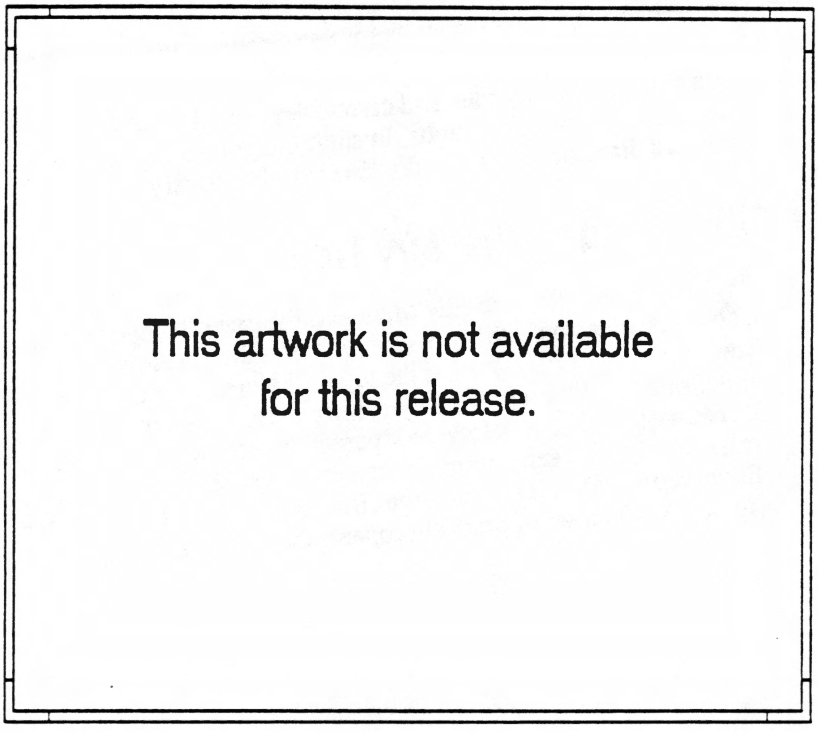

dir_5

To see the tree structure starting at the root directory of the current drive, enter this command:

```
tree \
```

If you would like to see the files in each directory of the tree, include the /f switch. For example, this command displays the directories with all their files on drive C:

```
tree c:\ /f
```

Viewing Directories in the Shell

The Shell File Manager screen, is divided into two parts. The left side of the screen shows the directory tree for the current disk. the right side of the screen shows the files in the selected directory. Using the File Manager commands, you

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

can change the way files and directories are displayed on the screen and perform file and directory operations. In addition, you can split the screen horizontally to see two directory trees and file lists simultaneously.

Using the File Manager Directory Tree

When you first start the File Manager, the tree displayed on the left side of the screen includes only the root directory and the first level of subdirectories. The root directory is displayed at the top of the directory tree area of the screen. Subdirectories of the root directory are listed below the root directory. Additional subdirectories are listed below their parent directories. The display shows the relationship between parent directories and subdirectories. Each directory has a folder icon next to it that provides information about the directory's subdirectories (in text mode, a set of brackets appears instead of an icon).

t-mark • Thu May 17 12:54:12 1990 • MICROSOFT CONFIDENTIAL

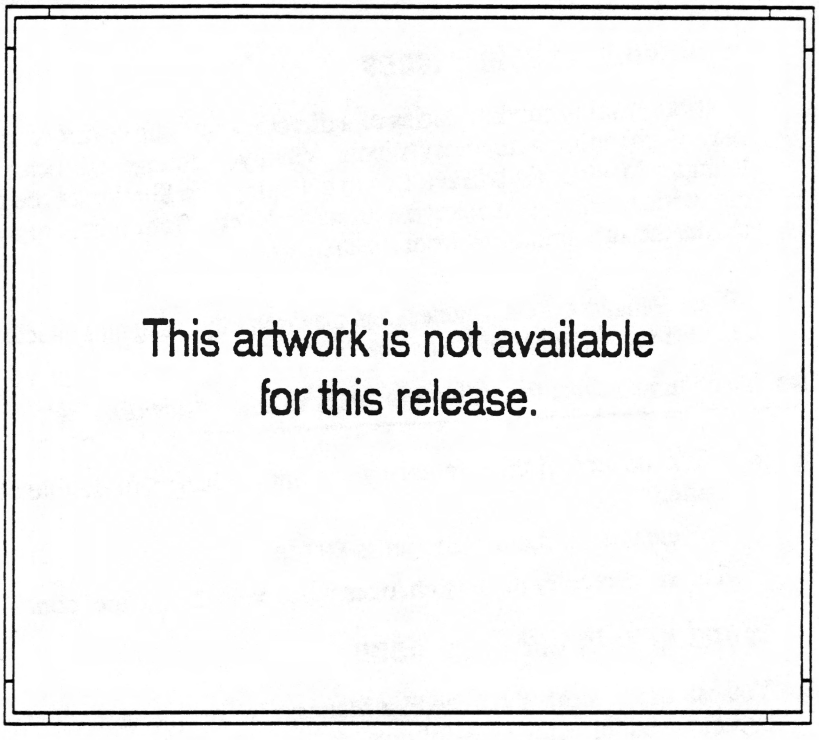

dlr_6

If a directory's icon is blank, that directory has no subdirectories. For example, in the preceding illustration the ???, ???, and ??? directories have no subdirectories.

If the icon contains a plus sign (+), the directory has subdirectories that are not displayed. For example, in the preceding illustration the ???, ???, and ??? directories have subdirectories that are not displayed.

If the icon contains a minus sign (-), the directory has subdirectories that are displayed. In the preceding illustration only the root directory's subdirectories are displayed.

You can change the subdirectory display by changing these icons with the keyboard or mouse, or by choosing the commands in the Tree menu.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Modifying Directory Icons

You can display subdirectories of a directory or remove directories from the display by changing a directory's icon. When you change a directory's icon from plus to minus to add its subdirectories to a display, the Shell only the next level of subdirectories. When you change a directory's icon from minus to a plus, the Shell removes the subdirectories from the display.

NOTE Removing subdirectories from the display by changing a directory's icon does not affect the subdirectories or their contents.

Shell ▶ **To change a directory's icon (and its subdirectory display):**

- Click the icon of the directory you want to change, or double click the directory name.

  Or select the directory and press ENTER.

  The subdirectory display changes when you change the icon.

Working with the Tree Menu

You can use commands in the File Manager's Tree menu to display subdirectories, or remove subdirectories as follows.

Command	Function
Expand One Level	Displays one level of subdirectories of the selected directory.
Expand Branch	Displays all levels of subdirectories of the selected directory.
Expand All	Displays all the subdirectories in the tree.
Collapse Branch	Removes the subdirectories of the selected directory from the display.

To display the level of subdirectories directly beneath the selected directory, choose Expand One Level from the Tree menu.

For example, suppose the selected directory contains three subdirectories, and each of these has two subdirectories of its own. If you choose Expand One Level, the three subdirectories are displayed. The subdirectories of the newly-displayed directories are not displayed.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

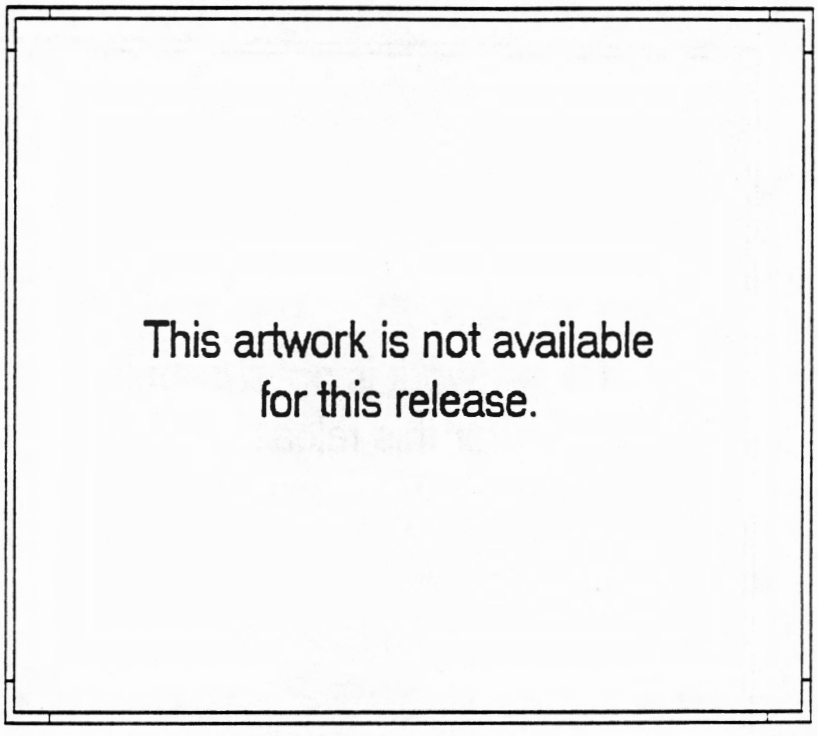

dir_7

The Expand One Level command is equivalent to changing a directory icon from plus to minus.

To display all the subdirectories of the currently selected directory, choose Expand Branch from the Tree menu.

For example, suppose the selected directory has three subdirectories, and each of these subdirectories has two subdirectories of its own. If you choose Expand Branch, all nine subdirectories directories are displayed.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

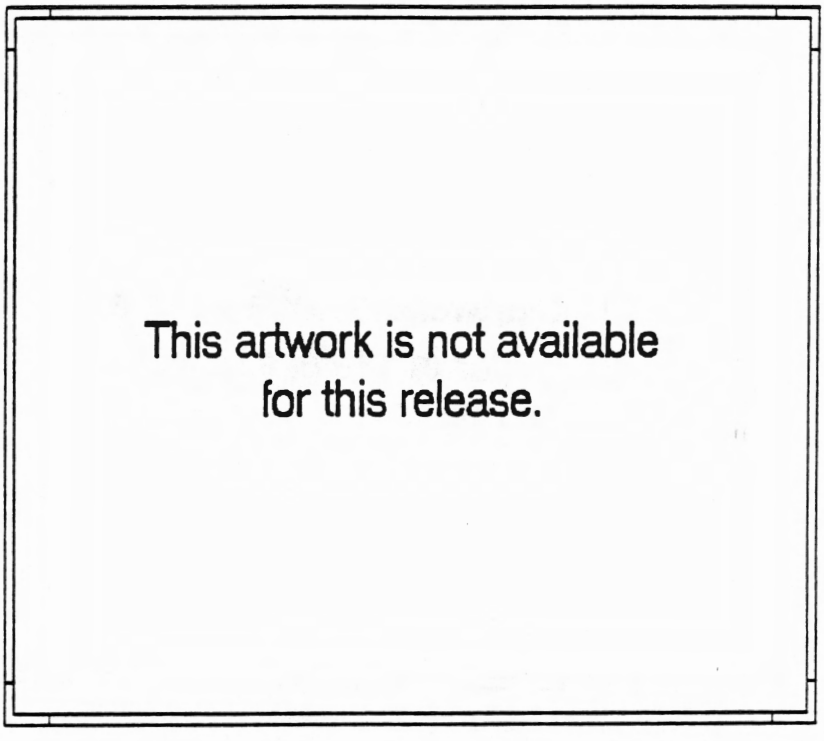

dir_8

To display all the subdirectories on the drive, choose Expand All from the Tree menu. Expand All works no matter which directory is selected.

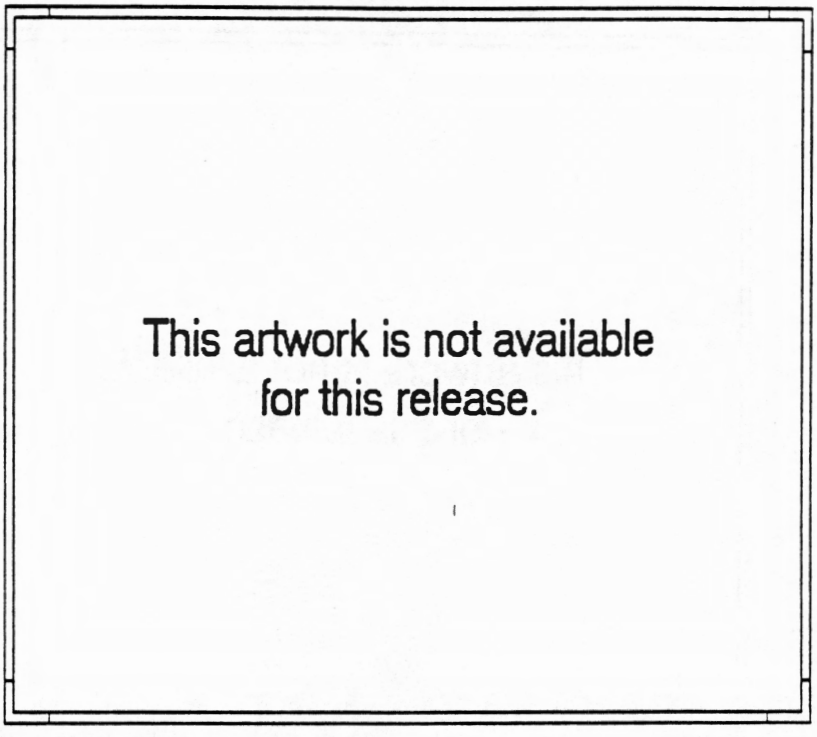

dir_9

NOTE Use the UP ARROW, DOWN ARROW, PAGE UP, and PAGE DOWN keys, or the scroll bar on the right side of the directory tree, to scroll up and down a long list of directories.

To remove the subdirectories of the currently selected directory from display, choose Collapse Branch from the Tree menu.

For example, if you select the root directory and choose Collapse Branch, all subdirectories are removed from display.

t-mark • Thu May 17 12:54:12 1990 • MICROSOFT CONFIDENTIAL

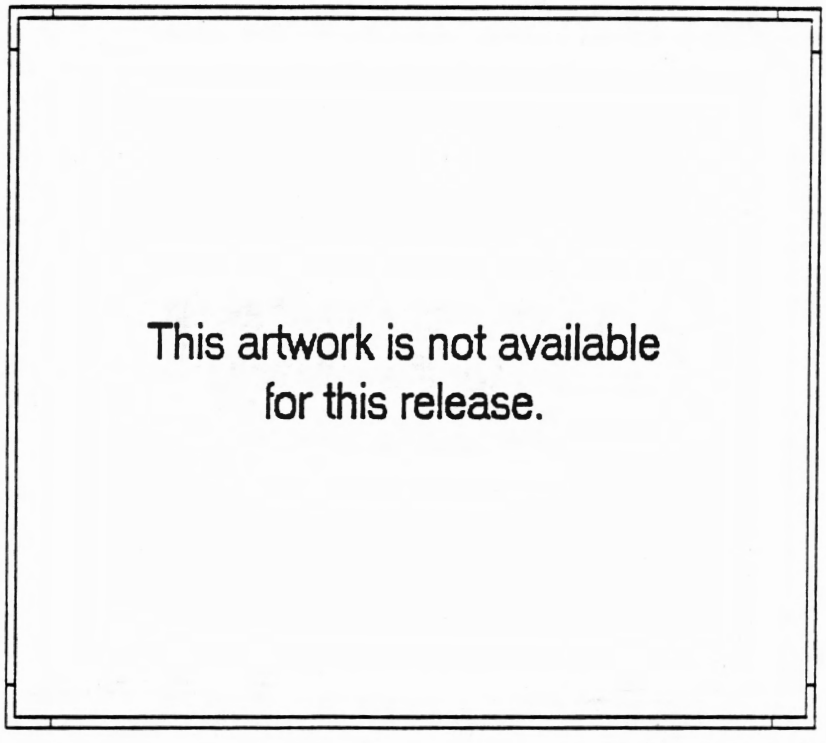

dir_10

The Collapse Branch command is equivalent to changing a directory icon from minus to plus.

Rearranging the Shell Display

You can change the way the File Manager displays directory trees and file lists using the options on the File Manager's Arrange Menu.

Displaying Two Directories at Once

When you first move to the File Manager screen, the files are in a single file list. To see and compare the contents of two directories, whether on the same drive or two different drives, use the Multiple File List command on the Arrange menu.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

To see the contents of two directories, choose Multiple File List command from the Arrange menu.

The screen displays two drive indicators, two directory trees, and two file lists.

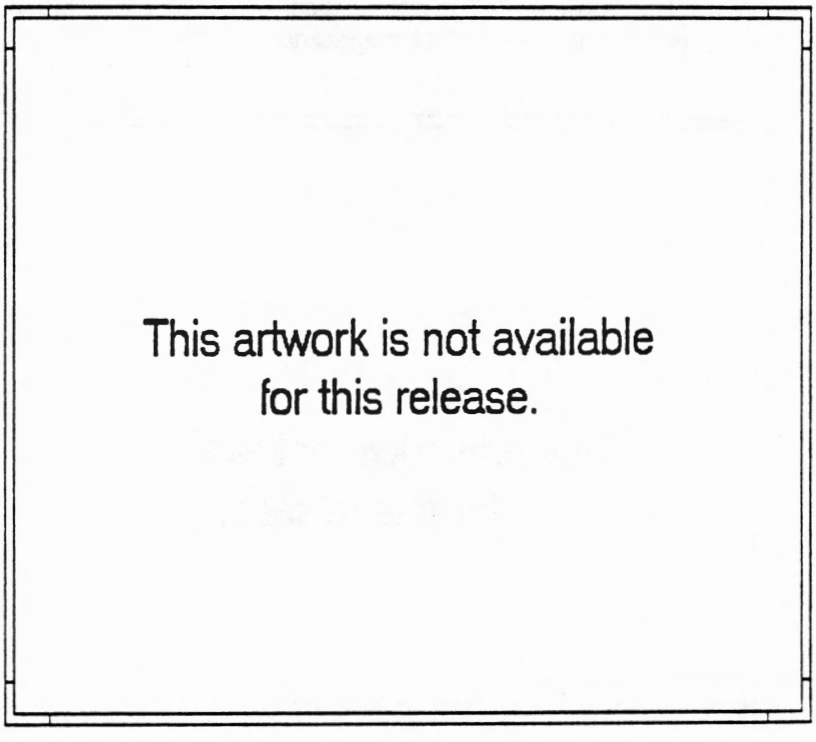

dir_11

You can use the TAB key or the mouse to move from one drive, directory, and file display to the other. You can change drives and directories in each display, and select files in either file list.

To select files from both file lists at once, select the Select Across Directories option in the File Options command. For more information about the Select Across Directories option, see "XX".

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Displaying All the Files on a Disk

The System File List command in the Arrange menu shows you all the files in all of your directories and a summary list of system information.

To display a system file list, choose the System File List command from the Arrange menu. The System file list appears.

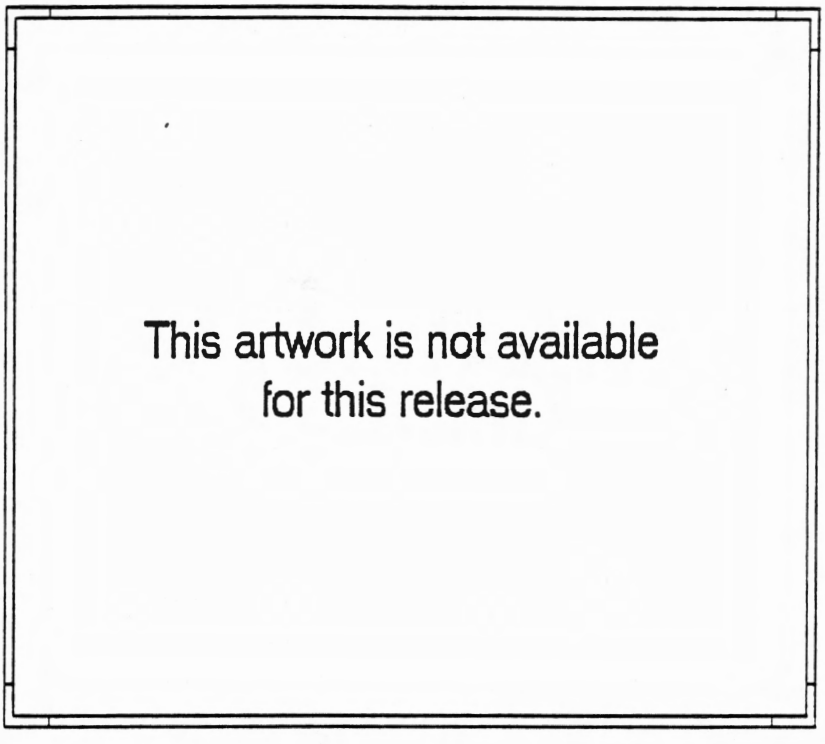

dir_12

The system file list provides the following information:

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Information	Description
File	The filename and type of file you have selected. The attributes are: (a) archive, (r) read-only, and (h) hidden file. You assign these attributes with the Change Attribute command in the File menu.
Selected	The number of selected files on the working disk and their combined total size. You may see two columns, with the previously selected drive also represented.
Directory	The name, size, and number of files in the directory you have selected.
Disk	The name, size, amount of available disk space, and number of files and directories on the disk you have selected.

Returning to a Single File List

You can return to the standard single file list format by choosing Single File List from the Arrange menu.

Modifying File Lists

You can display a selected group of files in a directory's file list or display the files in a different order by choosing the Display Options command from the Options menu. These modified file lists can make it easier for you to find and work with files in a long file list.

Displaying a Group of Files

You can display a specific group of files in a file list. To display a group of files, choose Display Options from the Options menu and type a combination of MS-DOS wildcards and characters in the Display Options dialog box.

For example, to display only files with an .EXE extension:

1. Choose Display Options from the Options menu.
2. The Display Options dialog box appears.
3. Type ***.exe** in the Name: box.
4. Choose OK or press ENTER.

   The files with an .EXE extension are displayed in the file list.

t-mark • Thu May 17 13:12:19 1990 • MICROSOFT CONFIDENTIAL

TIP After you've changed the display to show a group of files, you can easily show all the files again by choosing Display Options, pressing DEL, SPACEBAR or BACKSPACE to clear the Name box, and choosing OK or pressing ENTER.

For more information about MS-DOS wildcards, see "XX".

Sorting a Directory Listing

You can use the Display Options command to rearrange the order of files in a file list. You can reorder files in the following ways:

- by file name, in alphabetical order
- by file extension, in alphabetical order
- by creation date, in chronological order starting with the file created most recently
- by the number of bytes in the file, from largest to smallest
- by the order in which the files are stored on disk

Shell ▶ **To change the order of the files in a file list:**

1. Choose the **Display Options** command from the Options menu.
   A dialog box appears.
2. Choose the sort option you want.
3. Choose OK or press ENTER.
   The file list appears in the order you selected.

Files are sorted by name unless you specify otherwise. Once you change the sort order in the Display Options dialog box, files will be sorted in the order you selected until you change it again. If you are working with a multiple file list, both lists will be reordered.

Creating Directories

In Brief

To create a directory, use the **md** command (also called **mkdir**). For example, if the \WIN\EXCEL directory already exists, the following command creates the directory \WIN\EXCEL\FINANCE:

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

```
md. finance
```

If the new directory will be a subdirectory of the current directory, you need only type the part of the path that is not current.

Whenever you have a group of files that belong together (such as specialized files from the same program, files that belong to a certain person, files that are from the same project) consider storing them in their own directory. To create the directory, you use the **md** (make directory) command. For example suppose that the current directory is the root (\). To create a subdirectory to the root called WORD, you enter the following command:

```
md word
```

MS-DOS makes a new subdirectory of the root directory called \WORD. Instead of **md** you can use **mkdir** and get the same result. For example, this command does exactly the same thing as the preceding example:

```
mkdir word
```

The **md** command makes a subdirectory in the current directory unless you specify otherwise. For example, if the current directory is \WORD, to make a directory called \WORD\HOME, you need only type the last subdirectory in the path:

```
md home
```

MS-DOS makes a subdirectory in the \WORD directory called HOME. If you are not making a subdirectory of the current directory, you have to type the entire path of the new directory. For example, if the current directory is \WIN, to make \WORD\HOME, you would enter the following command:

```
md \word\home
```

If you include a drive letter in the **md** command, you can make a directory on a disk that is not the current disk. For example, suppose you wanted to copy the files in the current directory, C:\WORD\HOME to the disk in drive A. To keep the files separate, you might want to create a subdirectory on A to hold them. To create a directory on the disk in drive A without having to leave the current directory, you enter this command:

```
md a:\home
```

Shell ▶ **To create a directory as a subdirectory of the currently selected directory:**

1. Display the File System screen.
2. Select the directory for which you want to create a new subdirectory.
3. Choose Create Directory from the File menu.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

MS-DOS displays the Create Directory dialog box. The currently selected directory is shown as the parent directory.

4. Type the name of the new directory in the xx box.

   A name can be up to eight characters long, and you may add a three-character extension.

5. Choose OK or press ENTER.

   MS-DOS adds the new directory to the directory tree, as a subdirectory of the currently selected directory.

You can add directories at any level in the tree, but the directory you create will always be a subdirectory of the currently selected directory.

Moving Between Directories

The disks in each drive of your system have a current directory. If you have two floppy disks and one hard disk, there are three current directories.

If a disk has no subdirectories, the root directory is always the current directory for that disk. If a disk has subdirectories, you can use the **cd** (change directory) command to move from the one directory to another.

Finding Out Which Directory Is Current

In Brief

To display the current directory on the current drive, enter a **cd** command with no parameters as in the following command:

```
cd
```

If the command prompt is set up to show you the path of the current directory on the current drive, you need only look at the prompt to see which directory is current. If the prompt does not show the current directory or if you want to see which directory is current on another drive, you can use the **cd** command. For example, the following command displays the path of the current directory on the current drive:

```
cd
```

The following command displays the current directory on drive B:

```
cd b:
```


niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

It does not make drive B current.

Changing Directories

In Brief

To move to a different directory on the current disk, use the **cd** command (also called **chdir**). For example, the following command changes the current directory to \WIN\EXCEL\FINANCE:

```
cd \win\excel\finance
```

Use the path ".." to change to the parent directory current as in the following command:

```
cd ..
```

Suppose that the current directory is the root (\). You can move to the \WORD directory and make it current by entering the following command:

```
cd word
```

Instead of **cd** you can use **chdir** and get the same result. For example, this command is the same as the previous example:

```
chdir word
```

As in the **md** command, unless you specify otherwise, MS-DOS assumes you want to change to a subdirectory of the current directory. For example, if the current directory is \WORD, to change to \WORD\HOME, you need only type the last subdirectory in the path:

```
cd home
```

If the current directory is \WIN, to change to \WORD\HOME, you have to enter the entire path:

```
cd \word\home
```

To change to the parent of the current directory (the directory one level closer to the root) you can use the ".." combination. For example, if the current directory is \WORD\HOME, you can change to \WORD with this command:

```
cd ..
```

No matter which directory is current, you can change to the root directory of the current drive by entering this command:

```
cd \
```

You can't use the **cd** command to change the current drive, but you can use it to change the current directory on a drive that is not current. For example, suppose

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

the current drive is A. To change the current directory on drive C to \WORD *without making drive C current*, use the following command:

```
cd c:\word
```

Now, when you type C: in a command without a directory, MS-DOS assumes you want to use the \WORD directory. For example, if A is the current drive and \WORD is the current directory on drive C, the following command copies all the files from the current directory on drive A to C:\WORD:

```
copy *.* c:
```

The current directory on a drive is the root unless you change it.

Shell In the Shell, the files in the currently selected directory are displayed on the right side of the File System screen. The name of the currently selected directory appears in the directory indicator just above the drive indicator in the upper-left corner of the screen. In the directory tree, the currently selected directory is highlighted.

For information about selecting directories, see "XX".

Deleting Directories

In Brief

To delete a directory, use the **rd** command (also called **rmdir**), as in the following example:

```
rd \win\excel\finance
```

MS-DOS removes the FINANCE subdirectory from the \WIN\EXCEL\ directory. The directory you remove must contain no files or subdirectories.

If you no longer need a directory, you can remove it with the **rd** command. Before you remove a directory, it must be empty and it must not be the current directory. It cannot contain any files or subdirectories. If you display the contents of an empty directory with a **dir** command, it should have only two items listed: the period (.), which stands for the directory itself, and the double period (..), which represents the parent directory.

If a directory is empty, you can enter a **rd** command to delete it. For example, suppose you have a directory called \WORD. Before you can remove the directory, you must delete its contents with the following command:

```
del \word\*.*
```

You can then enter the following command to remove the directory:

```
rd word
```

MS-DOS removes \WORD from the current drive. If \WORD has subdirectories, you must remove them before you can remove \WORD.

Instead of **rd** you can use **rmdir** and get the same result. For example, this command is the same as the preceding example:

```
rmdir word
```

As with the **md** and **cd** commands, MS-DOS assumes you want to remove a subdirectory of the current directory. For example, if the current directory is \WORD, to remove \WORD\HOME you need only type the last subdirectory in the path:

```
rd home
```

If the current directory is \WIN, to remove \WORD\HOME, you must enter the entire path:

```
rd \word\home
```

If you include a drive letter in the **rd** command, you can remove a directory from a disk that is not the current disk. For example, to remove the A:\HOME directory while the current drive is C, use the following command:

```
rd a:\home
```

Shell ▶ **To delete a directory or subdirectory:**

1. Make sure the directory does not contain any files or subdirectories.
2. Select the directory.
3. Choose Delete from the File menu.

   MS-DOS displays the Delete Directory dialog box.
4. Choose option 2 to delete the directory. Choose option 1, or Cancel, if you don't want to delete the directory.
5. Choose OK or press ENTER.

If you try to delete a directory that contains files or subdirectories, the shell displays the Delete Directory dialog box with an "Access denied" message. If this message appears, delete the files and subdirectories in the directory and try again.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Copying Directories

To copy directories and their subdirectories, you use the **xcopy** command. The **xcopy** command is similar to the **copy** command. Both commands copy files from one directory or disk to another. However, while the **copy** command is designed to work with single files or groups of files, the **xcopy** command is designed to work with single directories or groups of directories. Both commands create new files in the "destination" directory, but only the **xcopy** command creates new subdirectories as well.

Copying All Files in a Directory

In Brief

To copy single directories (without subdirectories), use the **xcopy** command with no switches. For example, the following command copies all files in the C:\WIN\EXCEL\FINANCE directory to the \FINANCE directory on drive A:

```
xcopy c:win\excel\finance a:\finance
```

If you want to copy all the files in a directory to another existing directory, the **copy** command is equivalent to the **xcopy** command. Unlike the following **copy** command which uses wildcards to copy all of the files from drive A to drive B:

```
copy a:*.* b:
```

Because the **xcopy** command assumes you want to copy whole directories, you don't need to use wildcards. For example, the following **xcopy** command performs exactly the same function as the preceding command:

```
xcopy a: b:
```

Before MS-DOS copies the files, it displays a "Reading source file(s)..." message while it prepares to copy the files. As in the **copy** command, MS-DOS displays the names of the files it copies and tells you how many files were copied when the operation is complete.

Shell ▶ **To copy all of the files in a directory to another existing directory:**

1. Select the disk drive or directory containing the files you want to copy.
2. Choose Select All from the File menu to select all the files in the directory.

   If you don't want to copy all of the files, you can cancel the selection of individual files by holding down the CTRL key and clicking them, or by pressing SHIFT+F8, moving the selection cursor to the files you want to deselect, and

t-mark • Thu May 17 12:54:12 1990 • MICROSOFT CONFIDENTIAL

pressing CTRL+SPACEBAR. You can also use the Deselect All command on the File menu to deselect all the files and start again.

3. Choose Copy from the File menu to copy the files.

   MS-DOS displays the Copy dialog box.

4. Type the path of the directory you want to copy to in the To box. If the directory is on a different drive, include the drive name.

5. Choose OK or press ENTER.

For more information about paths and drive names, see "XX".

Creating Directories as You Copy

In Brief

If the destination path in an **xcopy** command does not exist, MS-DOS creates it. For example, the following command copies all files from the root directory of drive A to the C:\ATMP directory:

```
xcopy a: c:\atmp
```

If the directory does not exist, MS-DOS asks you if you wan to create it (to stop MS-DOS from prompting you by adding a backslash (\) to the end of the directory name.

You can use the **xcopy** command to create directories as you copy files. For example, suppose you want to copy all the files on the disk in drive A to drive C. Using the following **xcopy** command, you can tell MS-DOS to put the files in a directory called \NEWFILES:

```
xcopy a: c:\newfile
```

If the \NEWFILE directory does not already exist on drive C, MS-DOS creates it as a subdirectory of the root directory. Then, MS-DOS copies the files from drive A to the \NEWFILE directory. In this example, only the files in the root directory of drive A are copied. If there are subdirectories on drive A, MS-DOS does not copy them.

If you do not type a path, MS-DOS copies the files to the current directory.

Shell To duplicate a directory that has several subdirectories, first use the Create Directory command on the File menu to create the same directory structure in the new location. Then copy the files from each of the source directories to each of the destination directories.

t-mark • Thu May 17 12:54:12 1990 • MICROSOFT CONFIDENTIAL

Copying Subdirectories

In Brief

To reproduce a directory structure completely in another directory or on another disk, use the /s and the /e switches. For example, the following command recreates the directory structure and files within C:\WIN on drive B:

```
xcopy c:\win b:\ /s /e
```

To tell MS-DOS to copy the files in a directory along with any subdirectories that have files, you add the /s switch to the **xcopy** command. For example, suppose the disk in drive A has the following directories on it: \SCHOOL, \WORK, and \HOME. The following command copies the files in the root directory of A, the three subdirectories, and all their files to the directory on drive C called \MEMOS:

```
xcopy a:\ c:\memos /s
```

The backslash (\) after the A: tells MS-DOS to start at the root directory. The /s tells MS-DOS to copy every file in every subdirectory that has files. MS-DOS copies files from the root directory of drive A to C:\MEMOS, from A:\SCHOOL to C:\MEMOS\SCHOOL, from A:\WORK to C:\MEMOS\WORK, and from A:\HOME to C:\MEMOS\HOME. If any of the directories do not exist on drive C, MS-DOS creates them. In this example, empty subdirectories on drive A are not copied.

To copy empty directories add a /e switch in addition to the /s switch. For example, if the disk in drive A has an empty subdirectory called \MISC, in addition to the three subdirectories mentioned above, MS-DOS would not have copied it. To include the empty directory, enter this command:

```
xcopy a:\ c:\memos /s /e
```

MS-DOS copies the same files as before, but now also creates an empty directory called C:\MEMOS\MISC. You can use the /s switch with or without the /e switch. However, if you do use the /e switch you must also include the /s switch.

Renaming Directories

In Brief

To rename a directory, use the **xcopy**, **del**, and **rd** commands. For example, the following sequence of commands rename the \OPS\STATS directory to \OPS\FIGURES:

```
xcopy \ops\stats \ops\figures

del \ops\stats\*.*
```


niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

```
rd \ops\stats
```

If the original directory has subdirectories, add the /s and /e switch to the **xcopy** command, and delete each subdirectory separately.

▶ To rename a directory:

1. Copy the contents of the directory to a directory with the new name.
2. Delete the contents of the original directory
3. Delete the original directory.

For example, suppose you want to rename the C:\TEMP directory to C:\LETTERS. The first step is to copy the contents of the directory to a directory with the new name. You can accomplish this most easily with this **xcopy** command:

```
xcopy c:\temp c:\letters
```

MS-DOS creates a subdirectory of the root directory of drive C called LETTERS, and copies all the files from C:\TEMP into it.

The second step is to delete the files in C:\TEMP. To do this, use the following **del** command:

```
del c:\temp\*.*
```

MS-DOS asks you if you really want to delete all of the files in this directory. If you are sure the files were successfully copied to C:\LETTERS, enter **y**. If you have any doubt, enter **n** and use the **dir** command to double-check.

Once the C:\TEMP directory is empty, the final step is to delete the directory itself by entering the following **rd** command:

```
rd c:\temp
```

MS-DOS removes the old directory. As a result of this three-step process, the C:\TEMP directory has been renamed to C:\LETTERS.

Shell

▶ To change the name of a directory or subdirectory:

1. Choose Deselect All from the File menu if any files are selected.
2. Select the directory you want to rename.
3. Choose Rename from the File menu.
   A dialog box appears.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

4. Type the new name for the directory in the box.
5. Choose OK or press ENTER.
   The directory name changes.

Updating Directories

Sometimes you will have two directories that should contain the same files. For example, when you are making backups, you will have a primary directory that contains the files you are working on and a secondary directory or disk that contains the backup or most recent version of the files. To keep the secondary directory current, use the **replace** command.

Replacing Outdated Files

In Brief

To replace the files in a destination directory that are older than the corresponding files in a source directory use the **replace** command with a **/u** switch, as in the following command:

```
replace c:\win\*.* a: /u
```

MS-DOS replaces the files in A:\ that have more recent versions in C:\WIN.

Suppose you have a directory called C:\OPS\STATS containing statistics files you periodically update. To keep a backup of these reports you can copy them to a floppy disk and periodically update them with this command:

```
replace c:\ops\stats\*.* a: /u
```

MS-DOS compares the files in C:\OPS\STATS with the files on the disk in drive A. If a file on drive A has a more recent version on drive C, MS-DOS replaces the older version. This form of the command does not add any new files to the backup disk; it only updates those that are already there.

Adding New Files

In Brief

To add files to the destination directory that are currently only in the source directory, use the **replace** command with an **/a** switch. For example, the following command compares the files in C:\WIN with those in A:\ and copies any that exist in C:\WIN, but not in the A:\ directory:

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

```
replace c:\win\*.* a: /a
```

In the example in the previous section, you used the **replace** command with the /u switch to update the files on the backup disk in drive A. To add files to the backup disk, you use the /a switch rather than the /u switch. For example, the following command compares the files in C:\OPS\STATS with the files on the disk in drive A:

```
replace c:\ops\stats\*.* a: /a
```

If there are any files in the C:\OPS\STATS directory that aren't on the disk in drive A, MS-DOS copies them over.

Telling MS-DOS Where to Look for Files

When you want to run a program, you enter its filename. In order to run the program, MS-DOS must first locate it. Likewise, when you type a filename as part of a command, or when you try to get to a file from inside a program, MS-DOS must locate the file. Unless you tell it otherwise, MS-DOS only looks for files in the current directory.

There are two commands you can use to tell MS-DOS which other directories to search for files:

- The **path** command tells MS-DOS which other directories to search for program files and commands.
- The **append** command tells MS-DOS to search additional directories for all other kinds of files.

Using the Path Command

In Brief

To have MS-DOS search specific directories for program or batch files, use the **path** command. For example, the following command tells MS-DOS to look in the three directories listed in addition to the current directory when it searches for program and batch files:

```
path \;c:\bin;c:\utilities
```

Each directory in the **path** command is separated by a semicolon (;). The first backslash (\) tells MS-DOS to search the root directory of the current drive.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

One way to run a program stored in a directory that is not current is to enter its path and filename. Another way is to first make its directory current with the **cd** command. To avoid the extra work involved with either if these procedures, you can type all the paths you commonly use once in a **path** command. Then, if MS-DOS cannot find the file you type in the current directory, it searches the other directories you specified. The **path** command you enter remains active until you restart or reset your system.

For example, suppose you commonly run programs stored in the C:\PBRUSH directory, the C:\WORD directory, and the C:\EXCEL directory. You can save having to type these paths each time you want to use them by entering them once in the following **path** command:

```
path c:\word;c:\excel;c:\pbrush
```

Each directory is separated from the others by a semicolon (;). MS-DOS searches the directories in the order you type them (in this case, MS-DOS would search \WORD before \EXCEL). To have MS-DOS look first in the root directory of the current drive, you add it to the beginning of the list:

```
path \;c:\word;c:\excel;c:\pbrush
```

You can tell MS-DOS to search as many directories as you care to list in the **path** command as long as the command doesn't exceed 127 characters (not including the word *path*).

To set the search directories automatically each time you reset or restart the system, you can include a **path** command in your AUTOEXEC.BAT file. If you find that the search directories have already been set, it means that there is already a **path** command in your AUTOEXEC.BAT file. For more information, about AUTOEXEC.BAT, see xx.

Using the Append Command

In Brief

To have MS-DOS search additional directories for text or data files, use the **append** command. For example, the following command tells MS-DOS to look in the C:\WORD\NOTES directory in addition to the current directory for files that are included in commands or are requested by programs:

```
append c:\word\notes
```

The **append** command is similar to the **path** command except that it applies to non-program files. The **append** command is useful when you have directories that contain files you often use in commands.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

For example, suppose you commonly use the files stored in the C:\PBRUSH\PICS directory, the C:\WORD\DOCS directory, and the C:\EXCEL\SHEETS directory. You can save having to type these paths each time you want to use them by entering them once in the following **append** command:

```
append c:\word\docs;c:\excel\sheets;c:\pbrush\pics
```

As in the **path** command, each directory is separated from the others by a semicolon (;). MS-DOS searches the directories in the order you type them (in this case, \WORD\DOCS would be searched before \EXCEL\SHEETS).

Be careful that you don't end up using the wrong file. For example, suppose there is a file called LIST.TXT in both the C:\WORD\DOCS directory and the C:\EXCEL\SHEETS directory. After entering the append command in the preceding example, you might be tempted to delete the C:\EXCEL\SHEETS\LIST.TXT file by simply entering:

```
del list.txt
```

If you did, MS-DOS would delete C:\WORD\DOCS\LIST.TXT, not C:\EXCEL\SHEETS\LIST.TXT as you had intended.

To set the append path automatically each time you start the system, you can include an **append** command in your AUTOEXEC.BAT file. If you find that an append path has already been set, it means that there is already an **append** command in your AUTOEXEC.BAT file. For more information, see xx.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Chapter 7

Managing Disks

7

Disks store information permanently. In contrast to your system's random access memory (RAM), which is lost when you turn the power off, the information on a disk remains intact until you erase it. In addition, floppy disks provide a convenient method for transferring information. Almost all the programs you run come to you on floppy disks, and when you want to transfer files to other systems, you are likely to use floppy disks.

Types of Disks

The disks your system uses store information on magnetic surfaces. Floppy and hard disks get their names from the kind of magnetic surface they have. In floppy disks the magnetic surface is a thin flexible disk inside a protective plastic cover. Hard disks have two or more rigid disks stacked on top of each other in a sealed case. Hard disks are also called fixed disks because they remain in your system.

The information on all disks is divided into tracks somewhat like the grooves on a record. Each track is a concentric circle that can hold a certain amount of information. The more tracks a disk has, the more information it can hold. Floppy disks with the fewest tracks per side are called single sided or low density. Floppy disks with more tracks are called double sided, double density, quad density, or high density, depending on the number of tracks they have.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

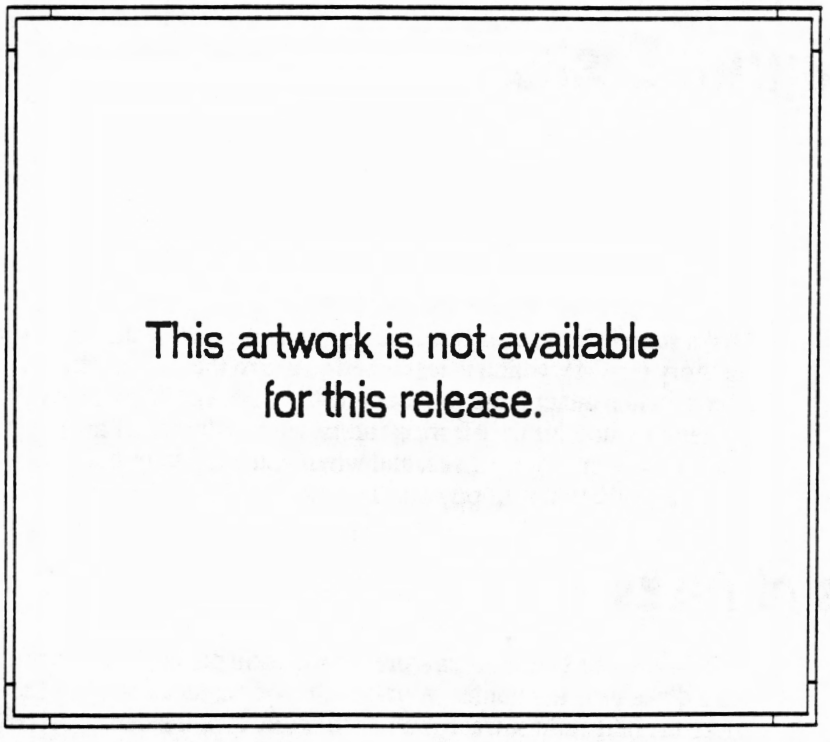

dsk_1

Both hard disks and floppy disks have tracks. Hard disks hold more information than floppies because they have more sides and more tracks per side.

Floppy disks vary in physical size and the amount of information they can hold. The following table lists the major kinds of floppy disks that MS-DOS can work with and the amount of information they can hold:

- 5.25-inch, single sided/double density, 160K
- 5.25-inch, single sided/double density, 180K
- 5.25-inch, double sided/double density, 320K
- 5.25-inch, double sided/double density, 360K
- 5.25-inch, double sided/quad density, 1200K (1.2 MB)

- 3.5-inch, double sided/double density, 720K
- 3.5-inch, double sided/quad density, 1440K (1.44 MB)

Most floppy disks have labels that tell you which kind they are. However, sometimes the only way to tell one type of disk from another is to use a **dir** or **chkdsk** command to display information about the storage capacity of a formatted disk.

Bytes, Kilobytes, and Megabytes

Your files are measured in *bytes*. One byte is the amount of space it takes to store a single letter. A kilobyte is 1024 bytes. In this guide, the word *kilobyte* is abbreviated K.

A megabyte is 1024K (about a million bytes). In this guide, the word *megabyte* is abbreviated MB. For example, if a disk can store about 1.2 million bytes of information, it is a 1.2 MB disk. The following terms are equivalent:

```
1.2 MB = 1228.8K = 1,258,291 bytes
```

Kinds of Disk Drives

Hard disks are indistinguishable from hard disk drives because the two are a single unit. Once your hard disk is installed, you should never have to remove it. MS-DOS adjusts its operations to suit the hard drive you use.

On the other hand, for every type of floppy disk there is a floppy disk drive that is designed specifically to work with it. Not all types of floppy disks are compatible with all types of floppy disk drives. In general, the capacity of the disk must be less than or equal to the capacity of the drive in order for them to be compatible. For example, if you have a quad density, 5.25-inch disk drive that is designed to work with 1.2 MB floppy disks, you can use 360K double-density floppy disks with it. However, if you have a 360K drive, you cannot normally use 1.2 MB disks with it. If you are unsure whether a disk will work with a drive, try it. MS-DOS will display a "General failure error" message if the drive and disk are incompatible.

MS-DOS automatically adjusts its operations to suit the disk drive you are using. In some commands, you must type an additional switch if your disk drive and disk don't have the same capacity.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Formatting Disks

MS-DOS must format disks before using them. To format a floppy disk, MS-DOS divides the disk into smaller segments called *sectors* and sets up a file tracking system. Hard disks are already divided into sectors by the time you are ready to format them, so MS-DOS ensures that the disk is usable and set up the file tracking table. If you are using a new hard disk, however, you need to partition it before you can format it. You can use the MS-DOS installation program to partition and format the hard disk automatically when you install MS-DOS. For more information about installing MS-DOS on a hard disk, see "XX". You can also partition a new hard disk by using the **fdisk** command. For more information on partitioning a hard disk with **fdisk**, see "XX".

A sector is the basic unit of storage on a disk. Each sector on a hard disk or floppy holds one half of a kilobyte of information. When MS-DOS formats a disk it checks each sector for defects. MS-DOS marks "bad" sectors so that it will not store information there. When MS-DOS stores a file on the disk it uses groups of sectors called *allocation units*. The number of sectors depends on the size of the disk.

When you format a floppy or hard disk, MS-DOS reserves a small part of the disk for its tracking system. The allocation system consists of two parts: a file allocation table (which tracks the location of each file on the disk) and the root directory (which stores the name, size, creation date and time, and file attributes for the files on the disk).

One of the reasons you can't get information back from a newly formatted disk is because MS-DOS destroys any existing file table to create a new one. With floppy disks there is another reason. As MS-DOS divides a floppy disk into sectors, it destroys the contents of any sectors that were already there. When it formats a hard disk, the old file table is destroyed, but any existing sectors remain intact. The old sectors are filled as you copy new information to the disk.

During the formatting process, you can copy the three main MS-DOS system files to the disk. This makes the disk a system disk that you can use to start your system. For more information about system disks, see "xx" later in this chapter.

CAUTION The **format** command destroys all information on a floppy or hard disk. You should develop the habit of using the **dir** command before formatting your floppy disks or you might accidentally destroy important files. The **format** command is used to prepare your hard disk, so it is possible to format a hard disk drive if you accidentally enter the wrong drive letter. As a safety measure, MS-DOS displays a warning message if you attempt to format your hard disk. If you accidentally format your hard disk you may be able to use the

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

unformat command to recover its contents. For more information, see "xx" later in this chapter.

Formatting a Single Disk

In Brief

To format a floppy or hard disk for use with MS-DOS, use the **format** command. For example, the following command formats a floppy disk in drive A:

```
format a:
```

You must specify the drive that contains the disk you want to format.

You format disks using the **format** command. For example, the following command formats the floppy disk in drive B:

```
format b:
```

MS-DOS requires you to specify the drive letter when you use the **format** command.

As it formats the disk, MS-DOS displays a message that tells you what percentage of the disk has been formatted. When MS-DOS is finished, it asks you if you want to give the disk a *volume label.* You can enter a label to describe the disk or press ENTER if you do not want a label. If you give the disk a volume label, be sure you also write it on the outside cover of the disk to help identify it.

After MS-DOS asks you for a label, it displays the following information that describes how the disk was formatted:

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

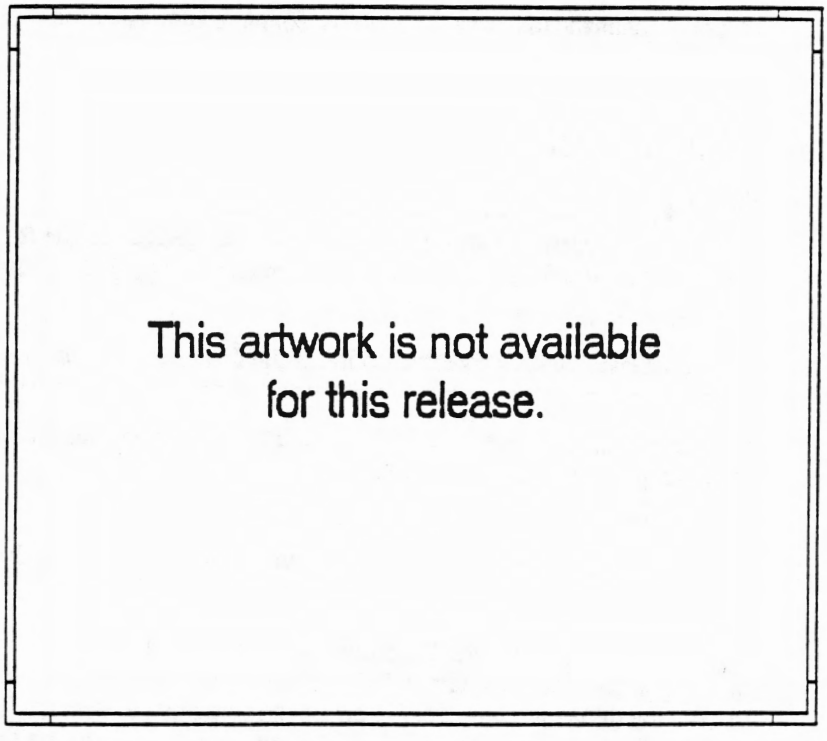

dsk_2

The "bytes total disk space" line tells you how much storage the disk contains. The number should be as much as or more than the capacity you expect for the disk. In the preceding example the total disk space is xx, a little more than the 1.2 MB the disk is designed for.

The "bytes used by system" line appears if you have transferred the MS-DOS system files to the disk. This line shows how much disk space is used by the three system files.

The "bytes in bad sectors" line tells you how much of the disk is unusable because of bad sectors. If there are no bad sectors, this line is omitted. The bad sectors that MS-DOS finds during the format will not be a problem because they have been marked. However, if a floppy disk has any bad sectors, it may be indicative of a growing problem with the disk. You should consider not using a floppy disk with bad sectors to store important files or backups. Most hard disks have a small num-

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

ber of bad sectors. In general, the portion of a hard disk taken up by bad sectors should be a very small fraction of the total space available on the hard disk. The exact permissable amount depends on the manufacturer of your hard disk.

The "bytes available on disk" line is the total disk space minus the space taken up the system and any bad sectors. If the disk does not contain the system files and there are no bad sectors, this number should match the total disk space number.

The "bytes in each allocation unit" line and the "allocation units available on disk" line show you the way MS-DOS has divided the available disk for file storage. If you multiply the two numbers on these lines the result will equal the number on the "bytes available on disk" line.

The "Volume serial number is" line shows you the serial number that MS-DOS has assigned to the disk. This number will not change unless the disk is formatted again.

On the last line of the display, MS-DOS asks you if you want to format another disk. Enter **y** to format another disk in the same drive with the same options. Enter **n** to return to the command prompt.

Formatting Different Disk Types

In Brief

To format a floppy disk that has a lower storage capacity than your disk drive, use the **/f:** switch. For example, if drive A is a high density disk drive, the following command allows it to format a 360K disk:

```
format /f:360
```

There are a number of different kinds of floppy disks, each of which MS-DOS must format differently. Unless you state otherwise, MS-DOS assumes that the disk you want to format has the maximum capacity for the drive. For example, if you have a high-density (1.2 MB) 5.25-inch disk drive, MS-DOS assumes that the disks you format in the drive are also high density. To tell MS-DOS that you want to format a disk with a lower capacity, you use the **/f:** switch.

For example, if drive A is a 1.2 MB, 5.25-inch drive and you want to format a 360K disk in it, you use the following command:

```
format a: /f:360
```

If drive B is a 1.44 MB, 3.5-inch drive and you want to format a 720K disk in it, you use this command:

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

```
format b: /f:720
```

NOTE Because there are differences in hardware between disk drives, some 360K drives cannot reliably read disks formatted on a 1.2 MB drive with the **/f:360** switch.

Creating System Disks

In Brief

To create a system disk that can start your system, use the **format** command or the **sys** command.

To create the system disk during the format operation, add the /s switch to the **format** command. For example, the following command copies the system files to the disk in drive A after it is formatted:

```
format a: /s
```

To create a system disk from a disk that is already formatted, use the sys command. For example, the following command makes the disk in drive B a system disk:

```
sys b:
```

System disks contain the MS-DOS program. They are the kind of disks you can use to start your system.

System disks are just like other disks except that they contain the three main MS-DOS system files: IO.SYS, MSDOS.SYS, and COMMAND.COM. When you switch on your system, these three files are moved from the system disk to your system's random access memory (RAM). The IO.SYS and MSDOS.SYS files are hidden files; you do not see them in directories. The COMMAND.COM file is usually in the root directory of every system disk. The other command and system files that MS-DOS uses need not be present on a system disk. If you have a hard disk, it is usually set up to be your main system disk. However, when you switch on the system, it always checks drive A first to see if you want to start the system from a system disk there. That is why you see an error message if there is a non-system disk in drive A when you switch on your system.

You can copy the three system files to a disk as part of the **format** command or with the **sys** command.

To make a disk a system disk when you format it, you include the /s switch in the **format** command. After the disk has been formatted, MS-DOS copies the three

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

files to the disk. For example, the following command formats the disk in drive B and makes it a system disk:

```
format b: /s
```

To make a disk a system disk after it has been formatted, you use the **sys** command. For example, the following command makes the disk in drive A a system disk:

```
sys a:
```

After you run this command, the disk has two of the three files you need. Before you start MS-DOS from the disk, you must copy the COMMAND.COM file to the disk.

When a floppy disk has the three system files on it, you can use it to start your system by putting it in drive A and switching on the system. When your hard disk has the system files on it, you can use it to start the system by making sure no other disk is latched into drive A when you switch on your system.

Unformatting a Hard Disk

In Brief

To recover as much information as possible from a hard disk that has been reformatted, use the **unformat** command as in the following example:

```
unformat c:
```

The **unformat** command will not restore floppy disks.

After you first set up your hard disk, it should rarely, if ever, need to be formatted. If you accidentally format your hard disk, you may be able to recover all of the information. If you run the **unformat** command before you store any files on the disk, MS-DOS will restore the disk to its condition before the format. If you have stored any files on the disk since you formatted it, MS-DOS will not be able to restore the entire disk. The amount of the disk MS-DOS can restore depends on where the new file is stored on the disk.

Unless you tell it otherwise, MS-DOS performs a "safe" format on your hard disk. The safe format allows you to use the **unformat** command. To disable safe formatting you include the **/u** switch with your **format** command.

To unformat the hard disk in drive C, use the following command:

```
unformat c:
```


niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

If MS-DOS cannot restore all the information on the disk, it displays a message asking you if you want to continue.

Using the Shell to Format Floppy Disks

When you format a floppy disk from the shell you are running the MS-DOS **format** command from the Program Manager screen. Therefore you use the same switches and some of the same procedures to format a disk from the shell as you would from the command line.

Switches allow you to format a floppy disk with a smaller storage capacity than your floppy disk drive and transfer the MS-DOS operating system to a disk. For more information about the switches you can use with the **format** command see the previous xx sections.

Shell ▶ **To format a floppy disk:**

1. Choose Format from the DOS Utilities group on the Program Manager screen.

   MS-DOS displays the Format Utility dialog box.

2. To format drive A and use no switches, Choose OK. To format a different drive or change the way the command functions, type a new drive letter and switches in the xx box and then choose OK.

   From this point on, MS-DOS displays the same messages and prompts in the Shell as it does at the command prompt. For more information about messages MS-DOS displays, see xx.

3. After the formatting is complete, to give the disk a volume label, type a name at the volume label prompt. If you don't want to give the disk a label, press ENTER at the prompt.

4. At the next prompt, enter **y** if you want to format another disk or enter **n** if you want to return to the MS-DOS Shell.

   MS-DOS returns you to the Program Manager screen when you press any key.

Labeling Disks

Each disk you use, including a hard disk, can have a name and a number. The name is called the volume label. You can use it to identify the disk electronically. The number is called the volume serial number. MS-DOS uses the volume serial number to keep track of which disk is in a drive. MS-DOS assigns a serial number to the disk when you format it. The serial number will not change unless the disk

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

is formatted again. Only disks formatted by MS-DOS versions later than 4.0 have a serial number.

MS-DOS displays the disk's volume label and serial number at the top of every directory.

You can change a disk's volume label with the **label** command. The volume labels you choose must be less than 12 characters long and cannot include the following characters: asterisk (*), question mark (?), slash (/), backslash (\), pipe (|), period (.), comma (,), colon (:), semicolon (;), plus sign (+), equal sign (=), double quotation mark ("), square brackets ([ ]) ampersand (&), and any control characters. Volume labels can include spaces but not tabs.

Assigning and Deleting Labels

In Brief

To assign a volume label to a disk, use the **label** command. For example, the following command gives the disk in drive A the label "backup disk 1":

```
label a:disk 1
```

The label can be no longer than 12 characters including spaces. There should be no spaces between the drive name and the label. If you enter the **label** command without parameters, MS-DOS prompts you for the drive and label you want.

If you work with a large number of disks, you may find it convenient to create a label for the disk that you can see when you use the **dir** or **vol** commands. This electronic label is called a volume label.

To assign a volume label, you use the **label** command. For example, the following command assigns the label "BERNIE'S 2" to the disk in drive A:

```
label a:bernie's 2
```

There must be no spaces between the colon of the drive letter and the label. If you type a drive letter, but no label, MS-DOS prompts you for a label. For example, to label the disk in drive B, you would enter the following command:

```
label b:
```

MS-DOS displays the current label and serial number for the disk in drive B and then prompts you to enter a new volume label.

To delete a volume label, enter the **label** command without a label name. Then, when MS-DOS prompts you to enter a new volume label, press ENTER. If you are giving a new volume label to a hard disk, MS-DOS asks you to confirm that you

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

want to delete the volume label. Enter **y** to delete the label or **n** to exit from the command without changing the current label.

Viewing Labels

In Brief

To display the volume label and serial number of a disk, use the **vol** command. The following command displays this information for the disk in the current drive:

```
vol
```

To view a disk's volume label and serial number, you use the **dir** command or the **vol** command. These commands can help you identify the disk you are using. With the **dir** command, the volume label and serial number for the disk that you specify are displayed above the list of files.

The **vol** command displays the volume label and serial number of the disk in the drive you specify. For example, the following command displays the volume label and serial number of the disk in drive A:

```
vol a:
```

Making Backup Disks

Because both floppy and hard disks can fail occasionally, and just in case you need a file you deleted, it is wise to back up your files on a regular basis. MS-DOS gives you many ways to make backup copies of files. If you want to make a backup copy of a few files, the simplest way is to use the **copy** or **xcopy** command to save the files on other disks. If you have a lot of files to back up, or if you want to automate the process of backing up files, you can use the **backup** command to:

- Back up single directories.
- Back up directories and their subdirectories.
- Back up selected files.
- Add files to a backup disk that you previously created.

Because the **backup** command uses whole disks, be sure you have enough disks to hold all the files you want to back up. MS-DOS deletes the existing files on the disks you use, so choose a disk for backups that you don't need for any other purpose.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

You cannot directly access the files that MS-DOS creates on backup disks. If you need to retrieve the files you backed up, you must use the **restore** command. The **restore** command reads the backup disk and puts the files you specify back where they came from. The **restore** command is described in "xx".

Backing Up Single Directories

In Brief

To create and maintain backup disks, use the **backup** command. For example, the following command makes a backup of the files in the C:\WIN directory on drive A:

```
backup c:\win a:
```

The simplest form of the **backup** command backs up single directories. For example, the following command backs up the files in C:\WORD\HOME to the disk in drive B:

```
backup c:\word\home b:
```

MS-DOS displays the following prompt to tell you to insert your backup disk and to remind you that it erases the existing files before creating the backup files.

```
Insert backup disk 01 in drive B:
 WARNING! Files in the target drive
 B:\ root directory will be erased
 Press any key to continue . . .
```

When you press a key, MS-DOS begins copying files from C:\WORD\HOME. Files in subdirectories of this directory are not copied. To cancel the command without erasing any files from the target disk, press CTRL+C.

MS-DOS creates two files on drive B: BACKUP.001 and CONTROL.001. It combines all the files in C:\WORD\HOME and stores them in BACKUP.001. It stores the pathnames of the files in CONTROL.001. MS-DOS also changes the volume label of the disk to BACKUP 001.

If MS-DOS needs more than one disk to back up your files, it prompts you to insert another disk in drive B. The second disk has the files BACKUP.002 and CONTROL.002 (if there is a third disk the files are BACKUP.003 and CONTROL.003, and so on). Usually, if you don't specify a drive, MS-DOS assumes you want to use the current drive. However, with the **backup** command, you must always type at least a drive letter for both the source and destination directories. You do not have to type the pathname of the current directory. For example, if C:\WORD\HOME is the current directory, the following command is equivalent to the preceding example:

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

```
backup c: b:
```

Backing Up a Directory and its Subdirectories

In Brief

To back up a directory and its subdirectories, include the **/s** switch with the **backup** command. For example, the following command backs up every file in every directory on drive C:

```
backup c:\ a: /s
```

You can save time by backing up a directory and all its subdirectories with one command. To include subdirectories in your backup, use the /s switch. For example, to back up C:\WORD\HOME and all of its subdirectories, enter the following command:

```
backup c:\word\home b: /s
```

MS-DOS copies the files from C:\WORD\HOME and all of its subdirectories into the BACKUP.001 file on drive B. The directory structure of the files is preserved in the CONTROL.001 file.

To back up all the files on drive C enter this command:

```
backup c:\ b: /s
```

MS-DOS starts at the root directory and backs up all the files on drive C. MS-DOS prompts you to insert new disks as it needs them.

Backing Up Selected Files

In Brief

To back up selected files from a directory, use the MS-DOS wildcards as in the following command:

```
backup c:\win\*.xls a:
```

It is not always necessary to back up all the files in a directory. Sometimes you need to back up only files of a certain type, or files that have changed since the last backup.

To back up a single file, specify its filename after its drive letter and path. For example, the following command backs up the OUTGO.XLS file in the C:\WORD\HOME\directory:

```
backup c:\word\home\outgo.xls b:
```


niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

To back up files of a certain type, you can use the MS-DOS wildcards. For example, the following command backs up only the files in C:\WORD\HOME that have a .DOC extension:

```
backup c:\word\home\*.doc b:
```

Adding Files to a Backup Disk

In Brief

To copy files to a backup disk without first deleting the files that are already there, use the /a switch with the backup command as in the following example:

```
backup c:\win a: /a
```

To add only files that have later versions than currently backed up file, or that don't already exist on the backup disk, include the /a and /m switches as in this command:

```
backup c:\win a: /a /m
```

In the preceding section, the **backup** command erased all existing files on the backup disk. To copy files to a backup disk without erasing the ones that are already there, use the /a switch. For example, the following command adds the files from C:\WORD\SCHOOL to those already on the disk in drive A:

```
backup c:\word\school a: /a
```

If some of the files from the WORD\SCHOOL directory are already on the backup disk, MS-DOS overwrites them with the files from drive C. When the operation is complete, the backup disk has the files it originally had plus the most current version of the files in C:\WORD\SCHOOL.

If you want to back up only files that have been added or changed since the last time you backed up a directory, use the /m switch with the /a switch.

For example, suppose that after you backed up the C:\WORD\SCHOOL directory, you added three new files and changed two that were backed up. To back up the files that are new or have changed, you would put the original backup disk in drive A and enter the following command:

```
backup c:\word\school a: /a /m
```

MS-DOS adds the new files to the backup disk and replaces the ones that have changed with the newer version.

NOTE If you use the /m switch without the /a switch, MS-DOS erases the existing files on the backup disk and copies only those that have changed since the last backup.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Using the Shell to Make Backup Disks

When you back up files from the Shell you are running the MS-DOS **backup** command from the Program Manager screen. Therefore, you use the same switches and wild cards and some of the same procedures to back up files from the Shell as you would from the command line.

Switches and wildcards allow you to back up subdirectories and selected files, and to add files to an existing backup disk. For more information about the switches and wildcards you can use with the **backup** command see the previous xx sections.

You can use the Backup Fixed Disk and Restore Fixed Disk commands only if you have the Shell installed on a hard disk.

Shell ▶ **To backup files:**

1. Choose Backup from the DOS Utilities group on the Program Manager screen.

   MS-DOS displays the Backup Utility dialog box.

2. To back up your entire hard disk, choose OK. To back up a subdirectory or selected files, or to add files to an existing disk, type the appropriate switches and wildcards in the Parameters box and then choose OK.

   From this point on, MS-DOS displays the same messages and prompts in the Shell as it does at the command prompt. For more information about messages MS-DOS displays, see xx.

3. When the backup is finished, press any key to return to Program Manager.

   To restore the files you backed up, you can use the Restore Fixed Disk command described in the following section.

Restoring Directories and Files

If you lose files you have backed up with the **backup** command, you can retrieve the copies stored on the backup disk with the **restore** command. If you use the **backup** command to make backup disks for your files, you must use the **restore** command to retrieve them. For information about the **backup** command, see the previous section.

Once you have created a backup disk, you can use the **restore** command to:

- Restore all the files on the disk to a specific directory or to a directory and its subdirectories.

- Restore selected files.

CAUTION Unless you use the **/p** switch, the restore command will overwrite files that changed since they were backed up. For information on the **/p** switch, see "xx" later in this section.

Restoring Files to a Directory

In Brief

To restore files backed up with the **backup** command, use the **restore** command. For example, the following command restores the files on the backup disk in drive B to their original locations in the root directory of drive C:

```
restore b: c:\*.*
```

The **restore** command requires a source directory, but it does not require a destination directory. The first parameter tells MS-DOS where to get the files from, and the second parameter tells MS-DOS which files to restore. For example, to restore all the files from the backup disk in drive B to the C:\WORD\HOME directory you would enter the following command:

```
restore b: c:\word\home\*.*
```

B: is the backup disk and C:\WORD\HOME*.* specifies the files you want to restore—every file on the backup disk that came from the C:\WORD\HOME directory.

When MS-DOS restores the files, it puts them in the directory they came from. If the directory they came from no longer exists, MS-DOS creates it.

When you enter the preceding **restore** command, MS-DOS prompts you to insert the disk with the backup files in drive B. When you press a key, MS-DOS displays the date of the backup and starts copying from the BACKUP.001 file to the C:\WORD\HOME directory. As files are restored, MS-DOS lists them on your screen.

If the files you want to recover were backed up on more than one disk, MS-DOS prompts you to insert the other disks. If the files you want to restore are not on the disk you specified, MS-DOS displays a "File not found" message.

To tell MS-DOS to prompt you before it replaces a file that is read-only or has been changed since the last backup, use the **/p** switch. For example, if you enter the following command, MS-DOS asks you to confirm your choice if any of the

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

files that are backed up on drive B are read-only or have been changed since they were backed up:

```
restore b: c:\word\home\*.* /p
```

NOTE The /p switch depends upon directory time stamps to determine which file is the most recent. Because time stamps are set according to your system clock, if you depend on the /p switch, make sure your clock is always accurate.

To restore files to a directory and its subdirectories, use the /s switch. For example, the following command restores files from the backup disk in drive B to the C:\WORD\HOME directory and all of its subdirectories:

```
restore b: c:\word\home\*.* /s
```

MS-DOS reads the CONTROL.001 file to find out which directory a file came from and then stores it there. Any directories that don't exist are created.

To make sure that every file on a backup disk is restored, use the /s switch and start restoring at the root directory. For example, the following command restores every file on the backup disk in drive A to its original location on drive C:

```
restore a: c:\*.* /s
```

Restoring Selected Files

In Brief

To restore selected files from a directory, use the MS-DOS wildcards as in the following command:

```
backup a: c:\win\*.xls
```

To see a prompt before MS-DOS replaces files that have changed since the last backup, use the /p switch as in the following command:

```
restore b: c:\*.* /p
```

You can restore a subset of the files that were backed up by typing a single filename or by using the MS-DOS wildcards. For example, to restore only the C:\WORD\HOME\OUTGO.XLS file from the backup disk in drive B, you could enter this command:

```
backup b: c:\word\home\outgo.xls
```

To restore only the files with a .DOC extension, you would enter this command:

```
restore b: c:\word\home\*.doc
```


niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Using the Shell to Restore Files

When you restore files from the Shell you are running the MS-DOS **restore** command from Program Manager. Therefore, you use the same switches and wildcards and some of the same procedures to restore files from the Shell as you would from the command line.

Switches and wildcards allow you to restore subdirectories or selected files. For more information about the switches and wildcards you can use with the **restore** command, see the previous xx sections.

You can use the Backup Fixed Disk and Restore Fixed Disk commands only if you have MS-DOS Shell installed on a hard disk.

Shell ▶ **To restore files:**

1. Choose Restore from the DOS Utilities group on the Program Manager screen.

   MS-DOS displays the Restore Utility dialog box.

2. To restore all of the files on the backup disk in drive A, choose OK. To restore selected files or change the drive that the backup disk is in, type the appropriate drive letter, switches and wildcards in the Parameters box and then choose OK.

   From this point on, MS-DOS displays the same messages and prompts in the shell as it does at the command prompt. For more information about the information MS-DOS displays, see xx.

3. When the operation is finished, press any key to return the Program Manager screen.

Verifying All Save Operations

In Brief

To verify any data that MS-DOS writes to disk, use the following **verify** command:

```
verify on
```

To stop verifying the data use this command:

```
verify off
```

In general, MS-DOS reads and stores information on your disks with no problems. Occasionally, due to problems with the magnetic media of the disk, information is

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

not stored properly on your disk. To tell MS-DOS to check that the information is stored accurately on your disks, you can use the following **verify** command:

```
verify on
```

While **verify** is on, MS-DOS makes sure that none of the sectors it tries to save information in are bad. To turn **verify** off, use this command:

```
verify off
```

To see whether the command is currently on or off, enter this command:

```
verify
```

When **verify** is on, data is written to disks more slowly than when it is off.

Recovering Files from Bad Disks

If you find that MS-DOS or another program can no longer read a file or group of files, there may be one or more bad sectors on the disk where the files or their directories are stored. To recover the parts of the file or files that are not damaged, you can use the **recover** command.

Recovering Files

In Brief

To recover as much information as possible from a file or files that have bad sectors, use the **recover** command. For example, the following command attempts to recover the COMB.TXT file from drive A:

```
recover a:comb.txt
```

You cannot get back the part of a file that is stored in a bad sector, but you can recover the rest of the file with the **recover** command. For example, if you have found that part of the GRAY.HIC file on drive A is no longer readable by the program that created it, you could use the following command to try to recover some of the information in the file:

```
recover a:gray.hic
```

MS-DOS reads the file one sector at a time. If any of the sectors are damaged, MS-DOS removes them from the file. MS-DOS marks the bad sectors so that it knows not to store any more information there.

When the operation is complete, MS-DOS stores the recovered file in the root directory of the disk it came from. MS-DOS names the files it recovers sequen-

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

tially, beginning with FILE0001.REC (FILE0001, FILE0002, FILE0003, and so on).

NOTE Even if a file is successfully recovered, it might be unusable if the lost information is necessary to the proper use of the file.

Recovering Disks and Directories

In Brief

If the directory of a disk is unusable, you may be able to recover some of the information on the disk with the **recover** command. For example, the following command recovers files from drive A:

```
recover a:
```

If you find that a disk is unusable because of problems in its directory, you can use the **recover** command to recover as much of the information on the disk as possible. For example, to recover files from drive A, you would enter this command:

```
recover a:
```

All the files that MS-DOS recovers are stored in the root directory of the disk they came from.

CAUTION The root directory can hold only a limited number of entries. If you try to recover more files than the root directory can hold, some files will be lost. In general, you should only use the **recover** command when it is absolutely necessary.

Giving a Drive Letter to a Directory

In Brief

To give a drive letter to a directory, use the **subst** command. For example, the following command assigns the drive letter A to the C:\BAR directory:

```
subst a: c:\bar
```

To remove the letter, use the **/d** switch. For example, the following command removes the association between A and C:\BAR:

```
subst a: /d
```


niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Sometimes, the program you are using will not accept any drive letters other than A and B. In these situations, you can use the **subst** command to fool the program into thinking that it is getting files from drive A or B when in reality the files are coming from a directory on your hard disk.

For example, suppose you are using a communications program that only accepts files from drive A or drive B. To use the files in C:\COMM with this program, you could enter the following command before you start the program:

```
subst a: c:\comm
```

Then, when the program requests files from drive A, MS-DOS will look in C:\COMM instead.

The drive letter you specify in the **subst** command must not be higher than the letter specified in the **lastdrive** command in the CONFIG.SYS file. For more information about the **lastdrive** command, see the *MS-DOS 5.0 User's Reference*.

When you are finished using the program, remove the association between the drive and the directory with the **/d** switch:

```
subst a: /d
```

The following commands ignore any associations you make with the **subst** command: **backup, format, chkdsk, diskcomp, diskcopy, fdisk, label, recover, restore, sys.**

Partitioning Your Hard Disk

Each operating system has its own conventions for storing files on a hard disk. If you use only MS-DOS, then it is no problem if your entire hard disk is set up using the MS-DOS conventions. However, if you want to use your hard disk with another operating system in addition to MS-DOS, you have to *partition* your hard disk into MS-DOS sections and non-DOS sections.

If you use only MS-DOS, you can create a single MS-DOS partition that occupies your entire disk. This gives MS-DOS access to all of the disk's storage capacity, and in some cases enables MS-DOS to gain access to the disk more quickly. If you use only MS-DOS but you would like to separate the files you store on your hard disk, you can create a second MS-DOS partition. In this case, MS-DOS still has access to the entire hard disk. However, the files in the second partition appear to be on a different drive.

If you want to use your hard disk with another operating system (for example XENIX or OS/2) you tell MS-DOS to use only part of the disk for its files. Then,

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

you can use the other operating system to set up the remaining disk space for its files. You switch to another operating system by making its partition *active*.

Partitioning your disk is different from formatting it. When you partition a disk, you tell MS-DOS which sections of the disk it can use. When you format a disk, MS-DOS prepares an existing partition to receive files. After you partition your disk, you must still format each partition before it can be used.

You create one or more MS-DOS partitions on a hard disk by using the Fdisk program included with MS-DOS.

Using Fdisk from the MS-DOS Command Prompt

You can partition you hard disk by entering **fdisk** at the command prompt.

The Fdisk program displays a series of menus that allow you to:

- Display information about your current partitions.
- Create, change, or delete MS-DOS partitions.
- Make a partition active.

CAUTION If you use Fdisk to change the existing partitions on a hard disk, you lose the information contained in those partitions. Be sure you have copies of all the data in a partition before you use Fdisk to change the partition.

Using Fdisk from the Install Program

You normally start Fdisk from the MS-DOS command prompt. If you want to partition your hard disk when you install MS-DOS, you can start Fdisk from the installation program. During the installation program, MS-DOS checks to see if your disk is partitioned. If is not partitioned, MS-DOS asks you how you want it partitioned.

If you choose to create a single MS-DOS partition, MS-DOS creates the partition and continues with the installation. If you choose to create more than one partition, MS-DOS starts Fdisk. You can then set up partitions, using the information in this section. When you are finished creating partitions with Fdisk, MS-DOS continues the installation process. For more information about installing MS-DOS, see "XX".

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Understanding Hard Disk Partitions

You can create two MS-DOS partitions on a hard disk:

- The *primary MS-DOS partition* is the main storage area for MS-DOS. If you want to start MS-DOS using a hard disk, that disk must have a primary MS-DOS partition.
- An *extended MS-DOS partition* provides a way to further divide the files on a disk. You do not have to create an extended partition.

Whatever disk space you don't allocate to a primary and extended MS-DOS partition can be made into one or more non-DOS partitions by another operating system. The total number of partitions on a hard disk cannot exceed four. Thus, if you create only a primary MS-DOS partition and do not give it all the space on the disk, you can create three non-DOS partitions from another operating system. If you create a primary and extended MS-DOS partition, and you don't use all the disk's storage capacity, you can create two non-DOS partitions from another operating system.

The Primary MS-DOS Partition

If you want to start MS-DOS using a hard disk, it must have a primary MS-DOS partition. If you want to start MS-DOS from your hard disk, the primary MS-DOS partition must contain the three MS-DOS system files. In general, the primary partition contains all the files that are on drive C. Most users require only this one partition. Your hard disk must have a primary MS-DOS partition to start MS-DOS.

You use Fdisk to set up a primary MS-DOS partition that takes up all the room on your hard disk, as shown in the following illustration:

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

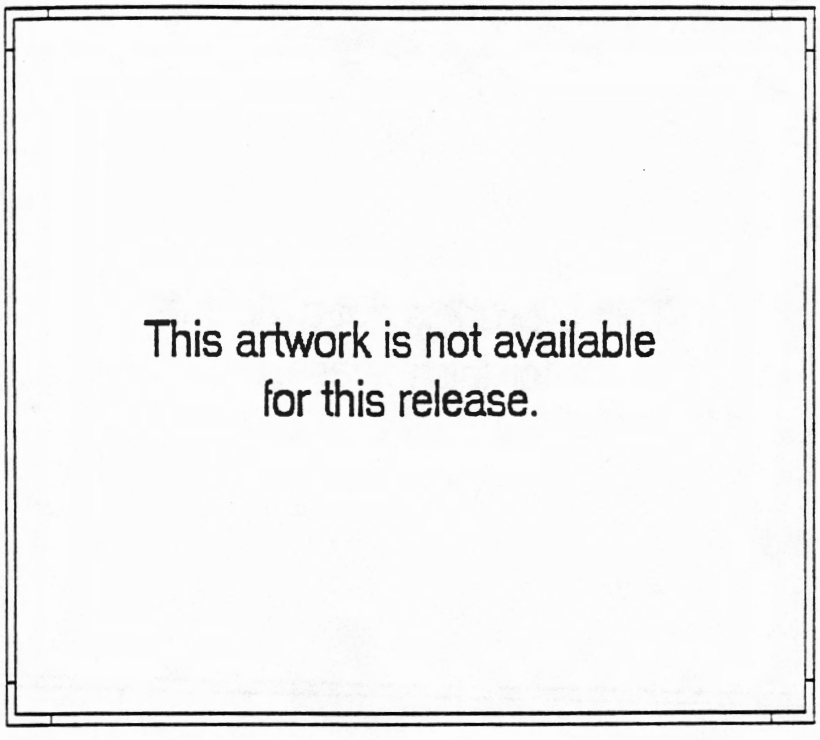

dsk_3

If you reserve half of the disk's space for the primary MS-DOS partition, the other half will be available for other partitions, as shown in this illustration:

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

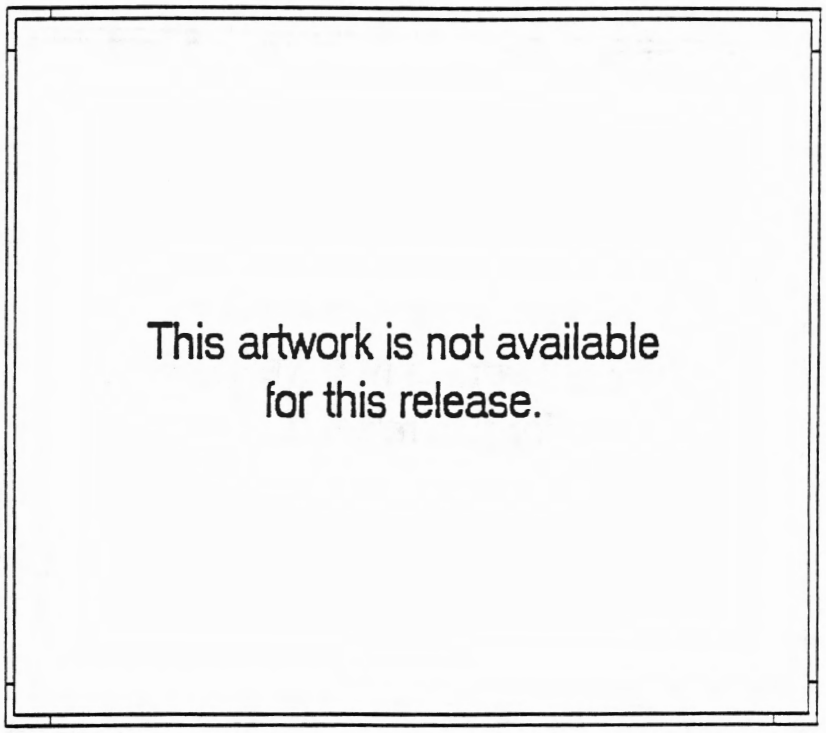

dsk_4

The Extended MS-DOS Partition

You can create a second MS-DOS partition on a hard disk, called an extended MS-DOS partition. An extended partition lets you treat a single hard drive as if it were two or more disk drives. When you create an extended partition, you divide it into one or more *logical drives*. A logical drive is a section of a hard disk that behaves like a separate disk drive. In other words, you can treat each logical drive in the extended MS-DOS partition as though it were its own disk drive.

For example, suppose you create an extended MS-DOS partition that takes up 10 MB of hard disk space. If you create one logical drive in the extended MS-DOS partition, that part of the hard disk is named D. Your system would have a C drive that contains the files in the primary partition and a D drive that contains the files in the extended partition. You can change the current drive to D and work with

files and directories stored in those 10 MB of the hard disk as though they were on a separate disk drive.

If you divide the extended partition into two logical drives, your system would have a C drive with the files in the primary partition, a D drive with some of the disk space in the extended partition, and an E drive with the remaining space in the extended partition.

There are 26 letters available for drives (A through Z). A and B are reserved for floppy disk drives. C is usually reserved for the primary partition (unless you have additional floppy drives). That leaves a maximum of 23 logical drives that you can create within an extended partition.

Suppose you create a primary MS-DOS partition and an extended MS-DOS partition containing two logical drives. A diagram of your hard disk might look like this:

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

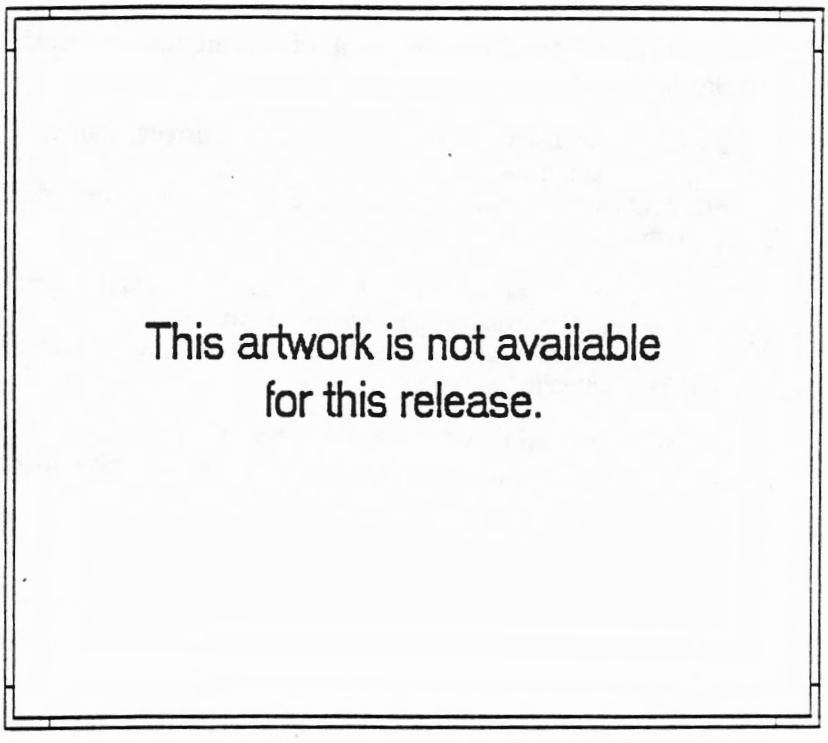

dsk_5

Logical drives do not give you more total disk space, but they do give you more flexibility in storing files.

Non-DOS Partitions

Non-DOS partitions are partitions for other operating systems (such as XENIX). You cannot use Fdisk to create a non-DOS partition. For information about creating non-DOS partitions, see the documentation for the system you want to use.

If you want to use non-DOS partitions, be sure you leave room on your hard disk. For example, if you want to use 40 percent of a disk for a non-DOS partition, you should create MS-DOS partitions that take up a total of 60 percent of the disk space. You can create two or three non-DOS partitions on a disk, depending on the number of MS-DOS partitions you have.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

If you use half your disk for MS-DOS and the other half for another operating system, a diagram of your disk looks like this:

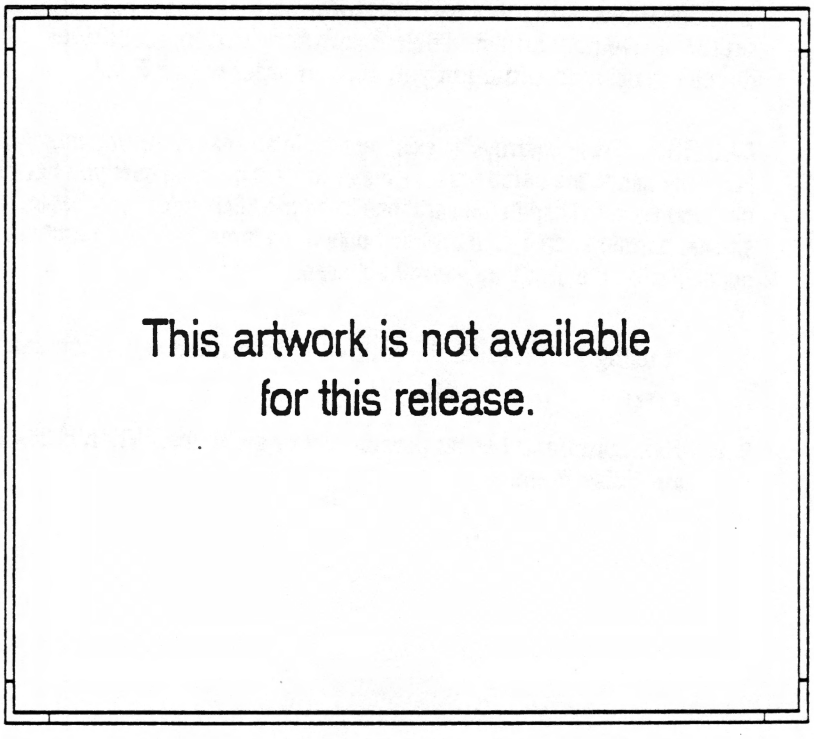

dsk_6

The Active Partition

To tell your computer to use the operating system stored in a partition, you make it active. To use MS-DOS, you make your primary MS-DOS partition active (because an extended MS-DOS partition does not contain the MS-DOS operating system it cannot be active). A hard disk can have only one active partition at a time.

If you have only a primary MS-DOS partition that occupies the entire disk, it is automatically the active partition. For more information about setting the active partition, see "XX" later in this chapter.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Using Fdisk

You use Fdisk to display partition information, create partitions and logical drives, set the active partition, and delete partitions and logical drives. This section introduces the basic information you need in order to use Fdisk.

CAUTION Fdisk destroys all existing files in any partitions you modify. If you are using Fdisk to change the partitions on a disk with files on it, be sure you have backup copies of all files you want to keep in the partitions to be modified before you begin. If you want to create smaller partitions on a hard disk that only has a large MS-DOS partition, you need to back up all files on the disk that you want to keep.

To start using Fdisk, enter the following command at the command prompt:

```
fdisk
```

The **fdisk** command has no parameters or switches. When Fdisk starts, it displays the main Fdisk menu:

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

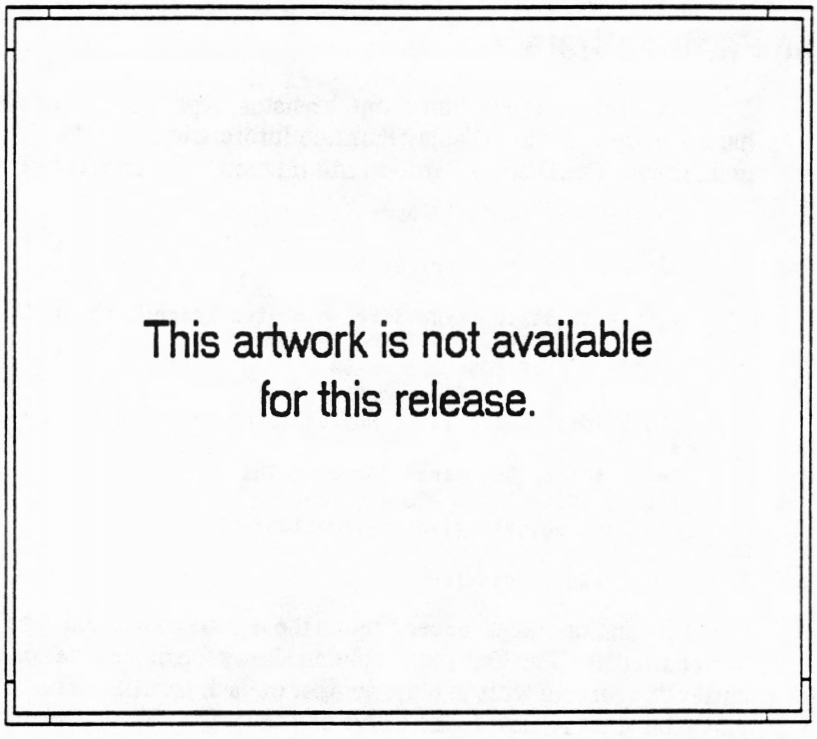

dsk_7

Fdisk uses a series of menus to display options, help messages, and warnings. To choose a menu option, type the number next to the option you want and press ENTER. To return to a previous menu, press ESC. To exit Fdisk, return to the main Fdisk menu and press ESC.

Each Fdisk menu displays a "Current fixed disk drive" message, followed by a number. The term *fixed disk* means *hard disk*. If you only have one hard disk drive, this number will always be 1. If you have more than one hard disk drive, the number will show which disk Fdisk is currently working with. The first hard disk drive in your system is 1, the second disk drive is 2, and so on. Changing the current drive in Fdisk does not change the current drive when you return to the system prompt. The Fdisk current drive refers only to physical disk drives, not logical drives.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Displaying Partition Data

You can display information about the status, type, and size of the partitions on a hard disk by choosing Display Partition Information (option 4) from the Fdisk main menu. The Display Partition Information screen looks like this :

```
Display Partition Information

Current hard disk drive: 1

Partition Status Type Size in Mbytes Percentage of Disk Used
 C: 1    A  PRI DOS   21    50
%  2       EXT DOS   21    50

%Total disk space is 42 Mbytes (1 Mbyte = 1048576 bytes).

The Extended DOS partition contains
logical DOS drives. Do you want to
display logical drive information?  [Y]

Press ESC to continue
```

The information varies, depending on the number, size, and type of partitions on your hard disk. The "Partition" column shows the drive letter of the disk Fdisk is currently working with, and the number of each partition. The "Status" column displays the letter A next to the active partition. The "Type" column shows whether a partition is a primary MS-DOS partition (PRI DOS), an extended MS-DOS partition (EXT DOS), or a non-DOS partition (non-DOS). The "Size in Megabytes" column shows the size of each partition, and the "Percentage of Disk Used" column shows the percentage of the current disk that each partition occupies.

If there is an extended MS-DOS partition that contains logical drives, Fdisk asks if you want to see information about that partition's logical drives. Enter y to display this information.

The screen looks like this :

```
Display Logical DOS Drive Information

Drv Volume Label Mbytes System Usage
D:  BACKUPA      18  DOS   90
%E:  BACKUPB      2  DOS   10

%Total Extended DOS Partition size is 20 Mbytes (1 Mbyte = 1048576
bytes)

Press ESC to continue
```

The information on the screen varies depending on the number and size of the logical drives. The "Drv" column displays the drive letter of each logical drive. The

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

"Volume Label" column shows the label assigned to each drive. "Mbytes" is the size of each logical drive and "Usage" shows the percentage of the available space in the extended MS-DOS partition that each logical drive takes up.

Creating a Primary MS-DOS Partition

The first hard disk you use with MS-DOS must have a primary MS-DOS partition. You can create a primary MS-DOS partition that reserves all of a hard disk's storage space or only a part of it. If you want to create an extended MS-DOS partition with logical disk drives, or if you want to leave room for a non-DOS partition, you need to create a primary MS-DOS partition that is smaller than the total size of your disk.

To change the size of an existing primary MS-DOS partition, delete it and recreate a new one that is the size you want. You will lose any information stored in the existing primary MS-DOS partition, so be sure you have backup copies of any files you want to save. See "XX" later in this chapter for information about deleting a partition.

If your hard disk already has a partition on it, you must delete it before you can create a primary MS-DOS partition that occupies the entire disk. If your hard disk does not already have a partition you can use the following procedure to create a primary MS-DOS partition that occupies the entire disk.

▶ To create a primary MS-DOS partition that occupies the entire the hard disk:

1. Start Fdisk and then press ENTER to choose Create MS-DOS Partition or Logical Drive (option 1) from the Fdisk main menu.

   The Create DOS Partition menu appears.

2. Press ENTER to choose Create Primary DOS Partition (option 1).

   Another menu appears, with this message:

   ```
   "Do you wish to use the maximum size for a Primary DOS Partition
   and make the partition active (Y/N).....? [Y]
   ```

3. Enter **y**. If you enter **n**, Fdisk prompts you to create a smaller primary partition. See the following procedure for more information.

   Fdisk creates a primary partition that occupies the entire hard disk. If you have only one hard disk MS-DOS displays the following message:

   ```
   System will now restart

   Insert DOS Install disk into drive A:
   Press any key when ready
   ```


niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

4. Insert an MS-DOS system disk and press any key. You still need to format your hard disk before you can use it. For more information about formatting, see "XX".

▶ To create a primary MS-DOS partition that occupies part of the hard disk:

1. Press ENTER to choose Create DOS Partition or Logical DOS Drive (option 1) from the Fdisk main menu.

   The Create DOS Partition menu appears.

2. Press ENTER to choose Create Primary DOS Partition (option 1).

   Another menu appears, with this message:

   ```
   "Do you wish to use the maximum available size for a Primary DOS
   Partition
   and make the partition active (Y/N).....? [Y]
   ```

3. Enter n.

   A second Create Primary DOS Partition menu appears.

4. Press ENTER if you want the default size (100%). Otherwise, enter the number of megabytes or percentage of the disk to use. If you enter a percentage, follow the number with a % sign.

   The following message appears:

   ```
   Primary DOS Partition created, drive letters changed or added.
   ```

5. Press ESC to return to the Fdisk main menu.

   When you leave Fdisk you will need to format the new partitions on your hard disk. For more information see "XX", later in this chapter.

Any part of the disk that you do not use for the primary MS-DOS partition can be used for an extended MS-DOS partition, or for non-DOS partitions.

NOTE When you create a primary MS-DOS partition that does not take up all the room on a hard disk, you must make the primary MS-DOS partition active before you can use the hard disk with MS-DOS. For information about making a MS-DOS partition active, see "XX" later in this chapter.

Creating an Extended MS-DOS Partition

To divide your hard disk into two MS-DOS storage areas, you create an extended MS-DOS partition. Within the extended MS-DOS partition you can create one or more logical drives. Logical drives are parts of your hard disk that MS-DOS treats

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

as separate disk drives. You can create only one extended MS-DOS partition on a hard disk, but you can create up to 23 logical drives in extended MS-DOS partitions on your hard disks.

If you have one hard disk, there must be a primary MS-DOS partition on the disk before you can create an extended MS-DOS partition. If you have more than one hard disk, the first disk in your system must have a primary MS-DOS partition, but you can create extended MS-DOS partitions on your additional disks without creating a primary partition on them.

▶ To create an extended MS-DOS partition:

1. Choose Create DOS Partition or Logical DOS drive (option 1) from the main Fdisk menu.
2. Choose Create Extended DOS Partition (option 2) from the Create DOS Partition menu.

   Fdisk displays a menu that shows the total number of megabytes available for an extended partition. The default for the partition size is the maximum available space on the hard disk drive minus the size of the primary partition. If there is no space available, you must delete and recreate the primary MS-DOS partition so it is smaller, or reduce the size of any non-DOS partitions that exist.
3. Press ENTER to choose the default size. Otherwise, type the number of megabytes or the percentage of the disk to be used for the extended MS-DOS partition. If you enter a percentage, follow the number with a % sign.

   The Create Logical Drive(s) in the Extended DOS Partition menu appears.

   When you create the extended MS-DOS partition, you can set up one or more logical drives. See the following section for more information.

NOTE If Fdisk finds any defective tracks at the start of an extended MS-DOS partition, it adjusts the partition boundaries to avoid bad tracks.

Creating Logical Drives in the Extended MS-DOS Partition

To store information on the portion of the hard disk assigned to the extended MS-DOS partition, you need to create one or more logical drives. Logical drives are sections of the extended MS-DOS partition that MS-DOS treats as disk drives. You can use logical drives to organize the information on your hard disk. When you create logical drives in an extended MS-DOS partition, they are assigned drive letters. For example, if you create one logical drive on a hard disk with the drive

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

letter C, the logical drive is given the drive letter D. For more information about how drive letters are assigned to logical drives, see the next section, "XX".

You can store and retrieve information on your logical drives as though they were physical disk drives. For example, you can use logical drive D to store files for a particular application, and work with them by specifying drive D rather than a directory location.

▶ **To create or modify logical drives:**

1. Create an extended MS-DOS partition. See the preceding section for more information.
2. On the Create Logical Drive(s) menu, enter the number of megabytes or the percentage of the partition space for the first logical drive you want to create. If you enter a percentage, follow the number with a % sign. If you want one logical drive to take up the whole extended MS-DOS partition, press ENTER to accept the default (the entire disk).
3. Continue entering the sizes of partitions until you have used up the entire partition or until you have created all the logical drives you want.

   If the entire partition is assigned to logical drives, Fdisk exits the menu automatically. To exit from the menu before all the space has been allocated, press ESC.

After you create logical drives, you must format them before MS-DOS can use them. For more information about formatting logical drives, see "XX", later in this chapter.

How Drive Letters Are Assigned

The primary partition of the first hard disk in your system is normally drive C. The drive letters of additional hard disks and logical drives depend on the number of disks and how they are partitioned.

NOTE If you have three or four floppy disk drives in your system, the primary partition of the first hard disk may be D or E. In the examples in this section, it is assumed that the primary partition of the first hard disk is C.

If you have only one hard disk, any logical drives you create in the extended MS-DOS partition are given letters beginning with D. For example, if you create five logical drives in the extended partition, they are named D, E, F, G, and H.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

If you have more than one hard disk, your first hard disk must have a primary partition (this partition is normally drive C). If you do not have any other primary partitions in your system, all the logical drives you create in the extended MS-DOS partitions on your hard disks are assigned letters consecutively.

Suppose you have two hard disks in your system: the first hard disk has a primary partition and an extended partition with two logical drives, and the second hard disk has an extended partition with two logical drives and no primary partition. The primary partition on the first disk is drive C, the two logical drives on the first hard disk are drives D and E, and the two logical drives on the second hard disk are drives F and G as shown in the following illustration.

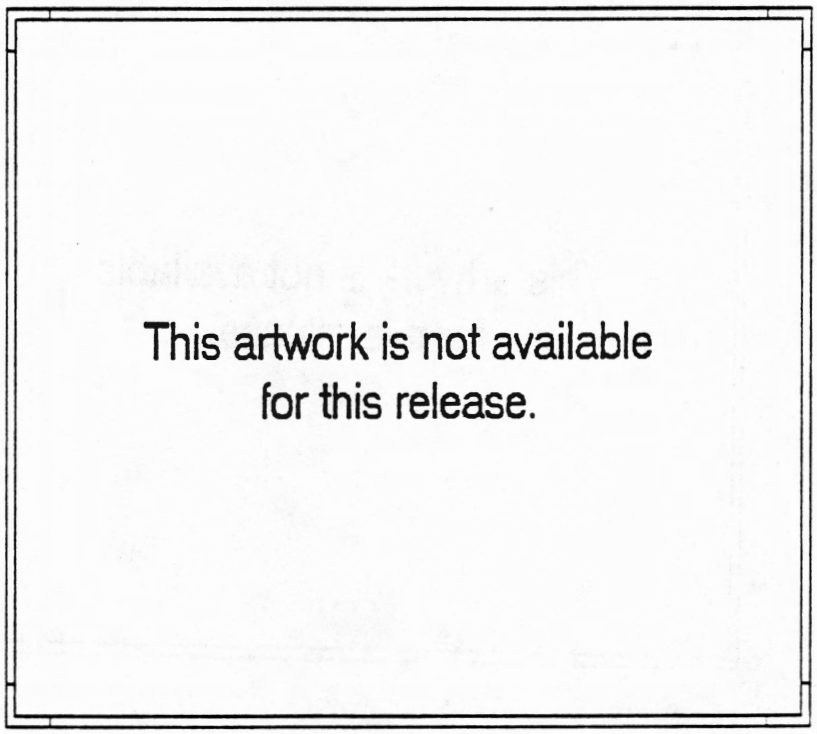

dsk_8

If you have a primary MS-DOS partition on more than one of the hard disks in your system, drive letters are first assigned consecutively to all the primary parti-

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

tions, and then assigned consecutively to the logical drives in the extended partitions.

Suppose you have two hard disks in your system: both hard disks have a primary partition and an extended partition with two logical drives. The primary partition on the first disk is drive C, the primary partition on the second disk is drive D, the logical drives on the first disk are drives E and F, and the logical drives on the second disk are drives G and H as shown in the following illustration.

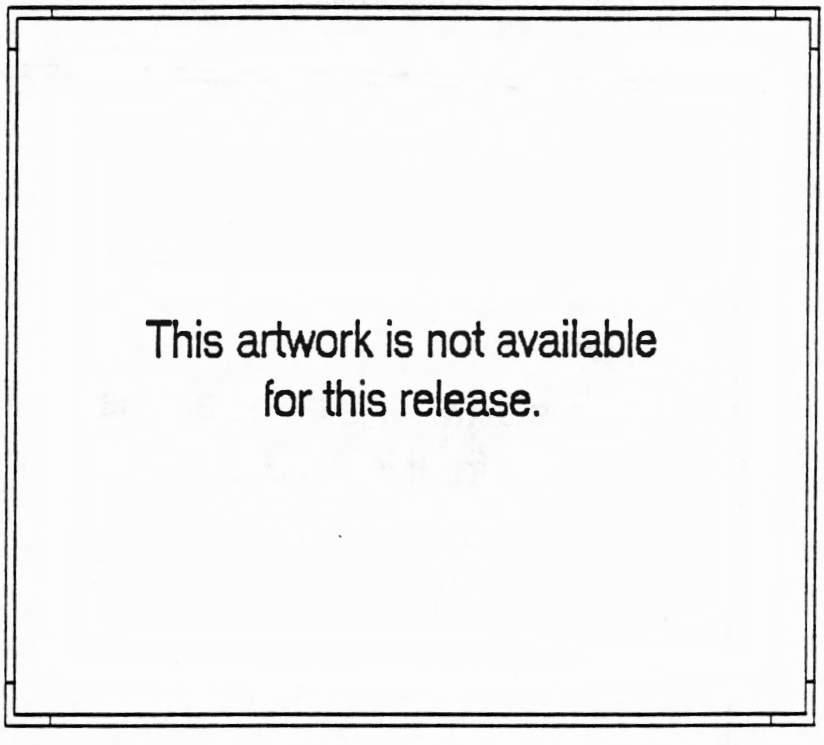

dsk_9

If you have existing logical drives on a hard disk and you add an additional hard disk, the logical drives are given new letters if you create a primary MS-DOS partition on the new disk. If you create only an extended MS-DOS partition, the drive letters on the first disk are unchanged. For example, suppose you have a logical drive on drive C that is named D. If you add a hard disk to your system and create

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

a primary MS-DOS partition on it, the primary partition on the new disk becomes drive D and the logical drive on the old disk becomes drive E.

On the other hand, if you add a hard disk to your system and create only an extended MS-DOS partition on it, the drives on the old disk are unaffected. Any logical drives that you create on the new disk are given the next available drive letter. For example, suppose you have one hard disk with a primary partition (drive C) and two logical drives (drives D and E). If you add a second hard disk and create an extended partition with two logical drives, these drives are named F and G. The drive letters on the first disk remain unchanged.

Setting the Active Partition

The active partition contains the operating system your system loads when you start or reset it. Unless you create a single MS-DOS partition that takes up all the room on your hard disk, you need to set the active partition with Fdisk. If you are using a non-DOS partition, you need to reset the active partition when you want to switch between MS-DOS and the non-DOS operating system. Only one partition can be active at a time.

▶ **To set the active partition:**

1. Choose Set Active Partition (2) from the Fdisk main menu.

   A menu appears that displays the status of each partition. The active partition is indicated with the letter A.

2. Enter the number of the partition you want to activate. The default setting is the current active partition number.

3. Press ESC to return to the Fdisk main menu.

If your hard disk drive contains only MS-DOS partitions, only the primary MS-DOS partition can be active. If you try to activate an extended MS-DOS partition, **fdisk** displays the following message:

```
Partition selected (3) is not startable, active partition not changed.
```

Deleting an MS-DOS Partition or Logical Drive

You might need to change the size of the partitions that currently exist on a hard disk for several reasons. You might need to make room for a non-DOS operating system, or you might want to change the size and number of the logical drives. You cannot reduce or enlarge an existing partition. If you want to change a partition's size, you need to delete it and recreate it again in the size you want. When

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

you delete a partition, all the information in the partition is erased and cannot be recovered. Before you delete a partition, be sure you have backup copies of the information you want to save in the partition. When you delete a partition, you will not lose the information in the other partitions on a disk.

For example, if you just want to delete the extended MS-DOS partition but not the primary MS-DOS partition, the files in the primary MS-DOS partition will not be affected. If you want to delete the primary MS-DOS partition on your first hard disk, you also need to delete the extended MS-DOS partition and all logical DOS drives.

You can delete one or more of the logical drives in the extended MS-DOS partition of a hard disk. All the information on a logical drive is lost when you delete it. Deleting one logical drive does not affect the information on other logical drives. However, if there are logical drives on a disk that have higher drive letters than the drive you delete, these letters will be changed. Suppose you have logical drives D, E and F on a disk. If you delete drive D, drive E becomes drive D and drive F becomes drive E.

▶ To delete an MS-DOS partition or logical DOS drive:

1. Choose Delete DOS Partition or Logical Drive (option 3) from the Fdisk main menu.

   The Delete DOS Partition menu appears.

2. Enter the number of the option you want.

   Fdisk displays the status of the partition or logical drives, along with a message warning you that the data in the partition or logical drive will be lost.

3. Enter the drive letter and volume label of the logical drive you want to delete.

   Fdisk displays a message confirming the information you entered.

4. Enter **y** to delete the partition or drive.

NOTE To continue using MS-DOS after you have deleted the primary MS-DOS partition, you must restart your system with an MS-DOS system disk in drive A.

Working with Additional Hard Disks

If your system has more than one hard disk drive, you can use Fdisk to create and modify partitions on any of the drives you have. Only the first disk needs to have a primary MS-DOS partition. Your other disks can have primary MS-DOS partitions or extended MS-DOS partitions.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

When you start Fdisk, it assumes you want to work with the first hard disk on your system. To work with a different disk drive, you must choose Change Current Fixed Disk Drive (option 5) from the Fdisk main menu, and specify the number of the drive you want to partition. If you only have one hard disk drive, the Change Current Fixed Disk Drive option does not appear on the Fdisk main menu.

You do not need to create a primary MS-DOS partition on additional hard disks in your system. Instead, you can create extended MS-DOS partitions with one or more logical drives.

When you finish creating partitions on an additional hard disk, you must format the partitions. See "XX" for more information. You do not need to use the /s switch or the sys command to transfer the system to additional hard disks.

Formatting Your Hard Disk After Using Fdisk

Fdisk reapportions the space on your hard disk, but it does not reformat it. After using Fdisk, you must use the **format** command to prepare any partition that you have created or changed.

You must format each new partition separately. For example, if you made your primary MS-DOS partition (drive C) smaller and created two logical drives in an extended partition (drives D and E), you must use the **format** command three times:

```
format c:
format d:
format e:
```

The first command formats the primary partition. The second and third commands format the logical drives.

When you leave Fdisk after you have changed the sizes of any of the MS-DOS partitions on any of your hard disks, Fdisk displays this message:

```
System will now restart
```

If you changed the size of your primary MS-DOS partition, Fdisk prompts you to insert an MS-DOS system disk in drive A and press any key. Otherwise, you do not need to insert an MS-DOS system disk. In either case, you return to the command prompt. You can now format one or more of the partitions on your hard disks with the **format** command.

If you are formatting the primary MS-DOS partition of the hard disk from which you will start your system, be sure to transfer the MS-DOS system with the /s switch or the sys command. For more information, see "XX".

lindas • Thu May 17 11:56:34 1990 • MICROSOFT CONFIDENTIAL

CAUTION If you have made changes to some of the partitions or logical drives in your system, but not all of them, be very careful when you format the partitions or drives you have changed. Since Fdisk may assign different letters to drives after you change partitions or logical drives, you may inadvertently format a drive that has information stored on it.

Before you format a drive in this situation, use the **chkdsk** command to check the contents of the drive. If you see the message "Probable non-DOS disk" before the disk information is displayed, the drive is not formatted. If the disk information is displayed without this message, the drive is formatted.

You may also want to give descriptive labels to your logical drives when you create them so that you can be sure which drive has what information when you make changes to your system.

For more information about formatting, see "XX".

Changing to Non-DOS Partitions

Fdisk can only create MS-DOS partitions. For information about creating non-DOS partitions, see the documentation for the non-DOS system you want to use. However, you can use Fdisk to make a non-DOS partition the active partition on your system by choosing Set the Active Partition from the Fdisk main menu and re-starting your system. If you decide later that you want to make the primary MS-DOS partition the active partition, start your system from drive A with an MS-DOS system disk, then run Fdisk to make the primary MS-DOS partition active.

niklasb • Wed May 16 17:03:21 1990 • MICROSOFT CONFIDENTIAL

Chapter 8

Advanced Command Techniques

8

This chapter describes three MS-DOS features for working with commands: redirection, command editing keys, and the Doskey program. *Redirection* means changing the place that a command gets information from or sends information to. Redirection is useful when you want MS-DOS to save information in a file rather than displaying it on the screen. You can also redirect the information that a command usually sends to the screen through a *filter command*. Filter commands help you sort, display, and select parts of a command's output.

MS-DOS provides a number of command editing keys that let you quickly redisplay and edit your last command rather than retyping it.

The Doskey program records the commands you enter so that you can use them again rather than retype them. Doskey uses the MS-DOS command editing keys plus a number of other keys that make it even easier to edit commands. In addition, Doskey lets you create macros that contain a series of commands that you can run like a batch file.

Redirecting Command Output and Input

Unless you tell it otherwise, MS-DOS gets input for a command from the keyboard and sends the output of the command to the screen. Sometimes it is useful to redirect the input or output to a file. For example, you might want to redirect a directory listing from the screen to a file. Or you might want the information that the **more** command displays to come from a file.

To tell MS-DOS to redirect the input or output of a command, you use one of the following *redirection characters*:

- The greater-than sign (>) tells MS-DOS to redirect the output of a command to a file or printer.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

- The less-than sign (<) tells MS-DOS to get the input for a command from a file rather than from the keyboard.

The following sections describe some of the uses of the redirection characters.

NOTE If you use a program such as MANS or LINK that prompts you for any parameters you don't enter with the program name, you can use input redirection to tell the program to look in a file for the parameters.

Redirecting the Output of a Command

Almost all commands send some output to your screen. Even the commands that send output to a disk drive or printer also display messages and prompts on the screen.

To redirect the output from the screen to a file or to your printer, use the greater-than sign (>). You can use the greater-than sign with any MS-DOS command. For example, the following command redirects the directory listing that the **dir** command produces to the DIRLIST.TXT file:

```
dir > dirlist.txt
```

If the DIRLIST.TXT file doesn't exist, MS-DOS creates it. If DIRLIST.TXT exists, MS-DOS replaces the information in the file with the output from the **dir** command. For example, the following command creates a file called CHECKDSK.TXT that contains the output of your most recent **chkdsk** command:

```
chkdsk a: > checkdsk.txt
```

MS-DOS replaces the contents of CHECKDSK.TXT with the output that the **chkdsk** command usually sends to the screen.

To add the output from a command to the end of a file without losing any of the information already in the file, use a double greater-than sign (>>). For example, the following command appends the directory listing that the **dir** command produces to the DIRLIST.TXT file:

```
dir >> dirlist.txt
```

To send the output of a command to the printer, use the greater-than sign (>) with the name of the port to which the printer is connected. For example, the following command redirects the output of the **dir** command from the display to the printer attached to the LPT1 port:

```
dir > lpt1:
```


niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

Redirecting the Input to a Command

Just as you can tell MS-DOS to send the output of a command to a file or printer rather than to the screen, you can tell it to take the input for a command from a file rather than from the keyboard. To tell MS-DOS to take input from a file, use the less-than sign (<). For example, the following command tells MS-DOS to take the input for the **sort** command from the LIST.TXT file:

```
sort <list.txt
```

MS-DOS alphabetizes the lines of the LIST.TXT file and displays the result on your screen. If you enter the **sort** command without a less-than sign, MS-DOS assumes that you will enter the lines you want alphabetized from the keyboard.

Passing Information Through Filter Commands

Filter commands divide, rearrange, or extract portions of the information you pass through them. MS-DOS has three filter commands:

- The **more** command displays files and command output one screen at a time.
- The **find** command searches through files and command output for the words that you specify.
- The **sort** command alphabetizes files and command output based on the first character of each line.

To tell MS-DOS that a filter command should get its input from a file, use the less-than sign (<). To tell MS-DOS that the filter command should get its input from another command, use the pipe character (|). The following sections describe how you use redirection characters with these the three filter commands.

Controlling the Screen Display with the More Command

The **more** command tells MS-DOS to display the contents of a file or the output of a command one screen at a time.

For example, to display the contents of the LIST.TXT file one screen at a time, you would use the following command:

```
more < list.txt
```

Between each screen of information, MS-DOS displays a "--More--" message. To continue to the next screen of information, press any key. To end the command without displaying any more information, press CTRL+C.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

The **more** command is particularly helpful if you are working with a command that produces a lot of output. For example, suppose you want to display a directory tree for your hard disk. If you have more directories than will fit on a single screen, you can follow the **tree** command with a pipe and a **more** command as in the following example:

```
tree c:\ | more
```

MS-DOS displays the first screen of output from the **tree** command and then pauses until you press a key.

Searching for Text with the Find Command

The **find** command searches one or more files for the text you specify. When it finds a line with text that matches the text you specified, it displays the whole line on your screen. The **find** command can be used as a filter command or as a regular MS-DOS command. For information about using **find** like a regular MS-DOS command, see xx.

To use the **find** command as a filter command, include a less-than sign and a filename to tell MS-DOS which file to search for the text. For example, the following command finds occurrences of the text *Pacific Rim* in the file TRADE.TXT:

```
find "Pacific Rim" <trade.txt
```

To tell MS-DOS to save the output of the **find** command rather than simply displaying it, use a greater-than sign (>) and a filename where you want the output stored. For example, the following command finds occurrences of the "Pacific Rim" in the TRADE.TXT file and saves them in the NWTRADE.TXT file:

```
find "Pacific Rim" <trade.txt >nwtrade.txt
```

To print the output rather than displaying it, use a greater-than sign and the name of the port your printer is attached to, as in the following command:

```
find "Pacific Rim" <trade.txt >LPT1:
```

Sorting Text Files

The **sort** command alphabetizes a text file or the output of a command based on the first letter of each line. In the previous section, you saw how the following command sorts the LIST.TXT file and displays the result on your screen:

```
sort <list.txt
```

The command tells MS-DOS to sort the lines of the LIST.TXT file and display the result without changing the file. If you don't include a less-than sign, MS-DOS assumes you want to enter the lines to be sorted directly from the keyboard.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

To save the output of the **sort** command rather than displaying it, include a greater-than sign (>) and a filename in the command. For example, the following command alphabetizes the lines of the LIST.TXT file and stores the result in the ALFLIST.TXT file:

```
sort <list.txt >alflist.txt
```

To sort the output of a command, enter the command followed by a pipe character (|) and the **sort** command. For example, the following command sorts the output of the **find** command:

```
find "Jones" maillst.txt | sort
```

When you enter this command, rather than simply finding and listing the occurrences of the word *Jones* in the file MAILLST.TXT, MS-DOS alphabetizes these occurrences and then displays them.

Combining Commands with Redirection Characters

You can combine filter commands, regular commands and filenames to make custom commands. For example, you can use the following command to store the names of files in the current directory that contain the characters *log*:

```
dir | find "log" > loglist.txt
```

MS-DOS passes the output of the **dir** command through the **find** filter command. MS-DOS stores the lines that contain the characters *log* in the LOGLIST.TXT file. The result is a stored list of filenames that contain *log* (for example, A.LOG, LOGDAT.SVD, and MYLOG.BAT).

To use more than one filter in the same command, separate the filters with a pipe character. For example, the following command finds the files in every directory on drive C whose names include the characters *log* and displays them one screen at a time:

```
dir c:\ /s /b | find "log" | more
```

This **dir** command would normally display every file on the disk. However, in this case, MS-DOS sends the output of the **dir** command through the **find** command. The find command selects only the files that contain the characters *log*. The **more** command displays the files that are selected by the **find** command one screen at a time.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

Using Command Editing Keys

MS-DOS provides several command editing keys that you can use to edit the last command you typed. For example, if you misspell the name of a file in a copy command, rather than retyping the whole command, you can use the command editing keys to redisplay the command and change the part that is misspelled. Or if your next command is similar to your previous command, you can include parts of the previous command in the command that you are typing.

When you enter a command, MS-DOS runs the command and also saves it in a temporary location called the *template*. For example, suppose you type the following command:

```
type ada.txt
```

When you press ENTER, MS-DOS runs the command and also copies it to the template. Whatever command was in the template is replaced by the command you entered. Thus, the template saves only the very last command you entered. For information about saving and reusing all the commands that you enter, see xx later in this chapter.

You can use the command stored in the template as a resource when you type your next command. To copy characters from the command in the template to the command you are typing, you use the MS-DOS command editing keys.

NOTE MS-DOS might clear the template if you load large programs.

The following table shows the command editing keys and how they help you use the command that is stored in the template. Each key can affect two commands: the command that you are typing and the command in the template.

To do this	Press this key
Delete the character before the cursor on the display and move back one character in the template.	LEFT ARROW or BACKSPACE
Delete the character above the cursor on the display and move forward one character in the template.	DEL
Insert new characters on the display without overtyping the existing characters on the display or moving forward in the template.	INS

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

To do this	Press this key
Copy the next character in the template to the display.	F1 (or RIGHT ARROW)
Copy characters up to the character you specify from the template to the display.	F2
Copy all of the remaining characters from the template to the display.	F3
Move forward in the template to the character you specify without copying characters to the display.	F4

The trick to using the template is knowing where you are in the template as you type a new command. In general, as you type a character on the display you move forward one character in the template. For example, if you type three new characters, the next character in the template is character number four from your last command.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

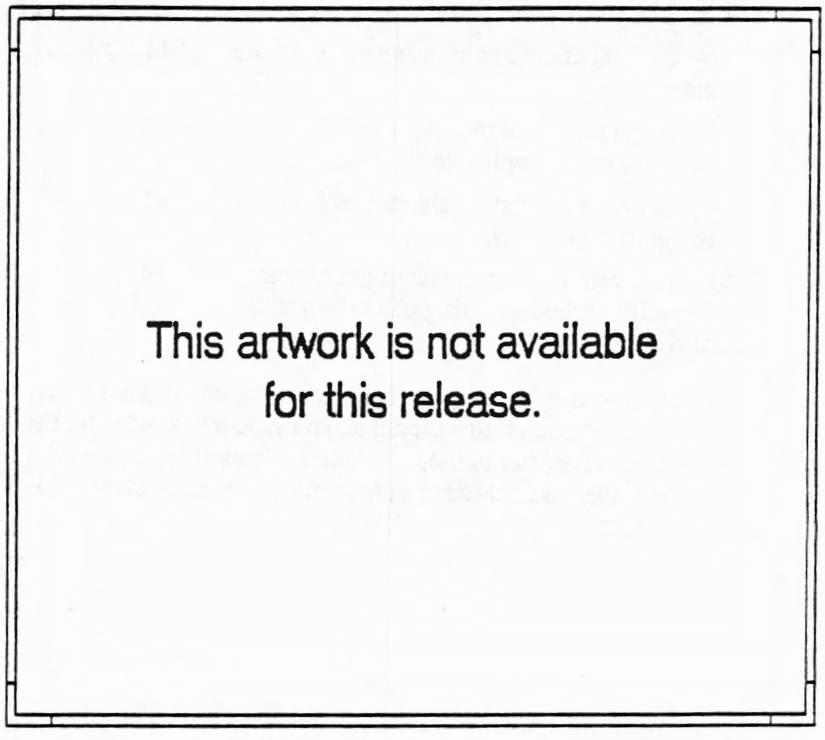

com_1

Redisplaying and Reentering a Command

Suppose you enter the following command

```
copy c:\word\*.doc a:
```

When you press ENTER, MS-DOS runs the command, copies it to the template and displays a new command prompt. Before you have typed any new characters, the cursor is at position one on the display, and the next character in the template is the first character of your previous command (C).

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

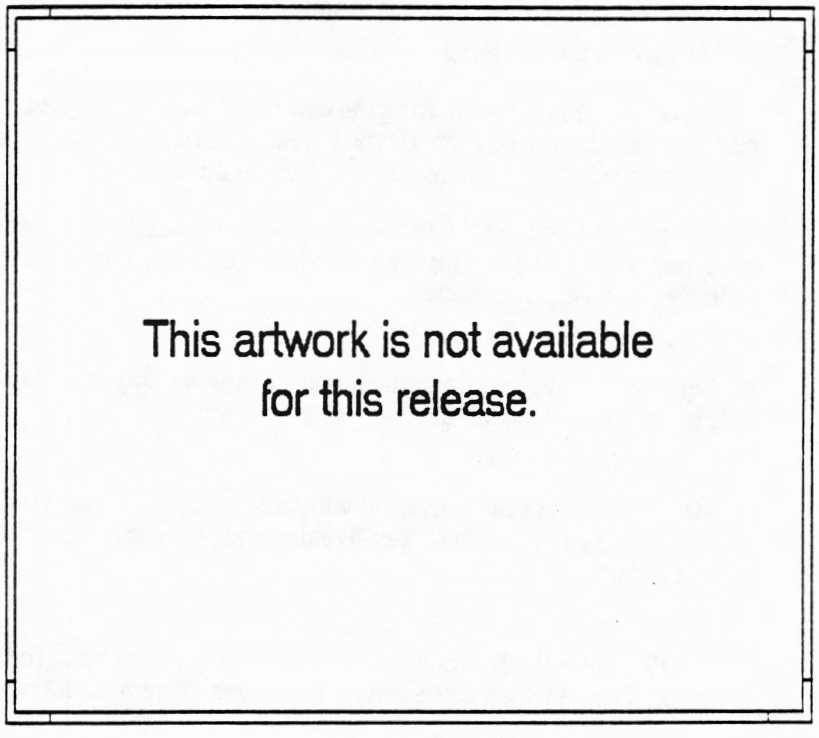

com_2

At this point, you can copy the entire previous command by pressing F3. For example, suppose you wanted to copy the *.DOC files onto two disks. After you have entered the command once, you can press **F3** to redisplay the command from the template:

```
copy c:\word\*.doc a:_
```

MS-DOS redisplays the command and places the cursor at its end. The result is exactly as if you had retyped the command. To copy your files to a second disk, you would insert a different disk in drive A and press ENTER. MS-DOS executes the **copy** command again.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

Fixing a Misspelled Command

Once you are familiar with using the command editing keys, it is often easier to edit your last command than to type it again. The key to editing your previous commands is to remember where you are in the template.

With just the F3 and LEFT ARROW keys you can quickly fix a command that you mistyped. For example, suppose you typed *.DIC when you meant to type *.DOC as in the following command:

```
copy c:\word\*.dic a:
```

Rather than retyping the command, you can edit the old one. To edit the command, first press **F3** to redisplay the command from the template:

```
copy c:\word\*.dic a:_
```

MS-DOS redisplays the command with the cursor at its end. To change DIC to DOC, press the LEFT ARROW key five times to move the cursor back to the first incorrect letter:

```
copy c:\word\*.d_
```

MS-DOS deletes the letters from the display and moves back five characters in the template. Then, to correct the command, retype the remaining portion:

```
copy c:\word\*.doc a:_
```

To run the corrected command, press ENTER.

You can use this method to correct a command or even change one command into another. For example, if you want to copy the *.DOC files and then copy the *.BAK files, you can enter the **copy** command once for the *.DOC files and then change it so that it copies the *.BAK files.

Editing a Command

Rather than having to retype information that follows the part of the command you changed, you can use command editing keys to work with the characters stored in the template.

For example, in the previous section, you saw how to use the LEFT ARROW key to delete characters from the display. Instead of correcting the command by retyping the remaining part, you can take advantage of the fact that as you backspaced on the display you also moved back in the template. After pressing LEFT ARROW five times, the command line and the template look like this:

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

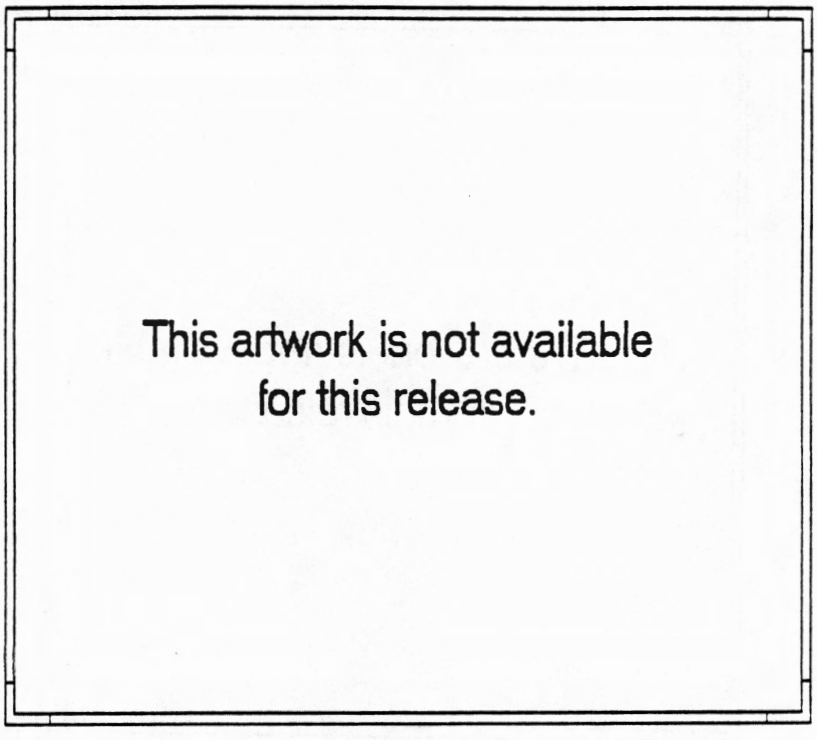

com_3

After you type the correct character, the display has one more character, and you have moved forward one character in the template:

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

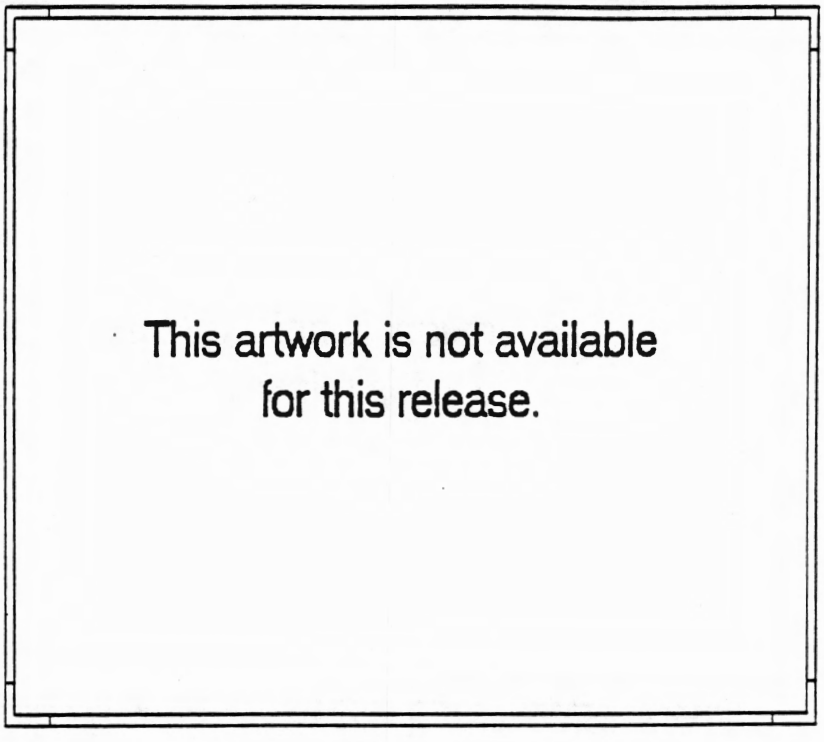

com_4

To copy the rest of the characters from the template to the display, press F3.

```
copy c:\word\*.doc a:_
```

Notice that when the command line is blank, F3 redisplays the entire previous command from the template. After you have typed part of a new command, F3 redisplays the template from the next character on.

Editing with F1 and INS

Suppose you have the following command stored in the template:

```
dir c:\word\finals\*.bak
```

To redisplay the command one character at a time you press the F1 key. For example, if you press F1 11 times, you will display the first 11 characters of the command:

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

```
dir c:\word_
```

To insert text in the command without changing where you are in the template, press INS before typing the new letters. For example, to change WORD to WORD-NEW, press INS and then type NEW:

```
dir c:\wordnew_
```

To continue copying characters from the template to the command line, you press F1 again. For example, to copy \FINAL from the template to the command line, press F1 six times:

```
dir c:\wordnew\final_
```

Editing with DEL

To avoid copying characters from the template to the command line, you press DEL. For example, to skip the next character in the template (the S in FINALS) you press DEL once:

```
dir c:\wordnew\final_
```

Because there is no character above the cursor, DEL has no effect on the display. However, in the template, the DEL moved forward one character. If you press F3 to copy the rest of the line from the template to the display, you'll notice that the S from FINALS is not copied:

```
dir c:\wordnew\final\*.bak_
```

Editing with F2 and F4

Often it is most convenient to use only part of the command that is stored in the template. To tell MS-DOS to copy characters from the template up to a certain position, you press F2 and type the character you want to copy up to. For example, suppose you have the following command in the template:

```
dir c:\wordnew\final\*.bak
```

To change the command so that it gives you a directory listing for C:\WORD-NEW, you can use the F2 key. To copy the characters in the template up to the first backslash (\), press F2 and type a backslash:

```
dir c:_
```

MS-DOS copies the characters up to but not including the backslash. The next character in the template is the first backslash in the command. To copy the characters up to the next backslash, press F2 and type backslash once more:

```
dir c:\wordnew_
```

Now you have the command that you want. To run it, you press ENTER.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

To move forward in the template without copying characters to the display, you press F4 and type the character you want to move forward to. For example, suppose the following command is in the template:

```
dir c:\wordnew\final\*.bak
```

You can use the F4 key to transform the command in the template into the following command:

```
dir c:\wordnew\*.bak
```

First, to copy the characters up to the second backslash you can press F2, press W, and press F1 twice. Afterwards, the display and the template look like this:

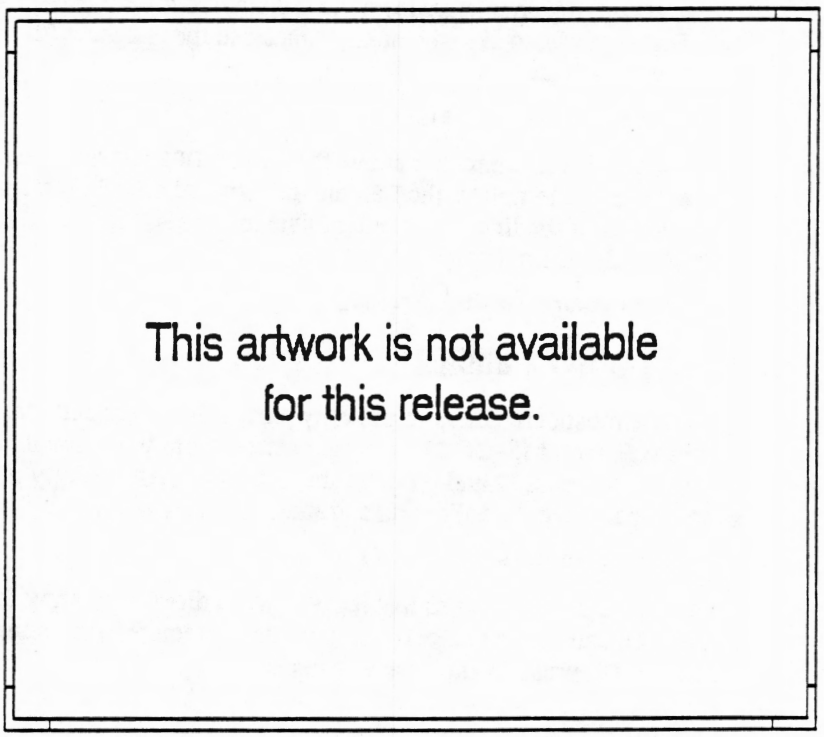

com_5

nikasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

To move to *.BAK in the template without copying any characters to the display, press F4 and type asterisk (*). At this point, the template and the display look like this:

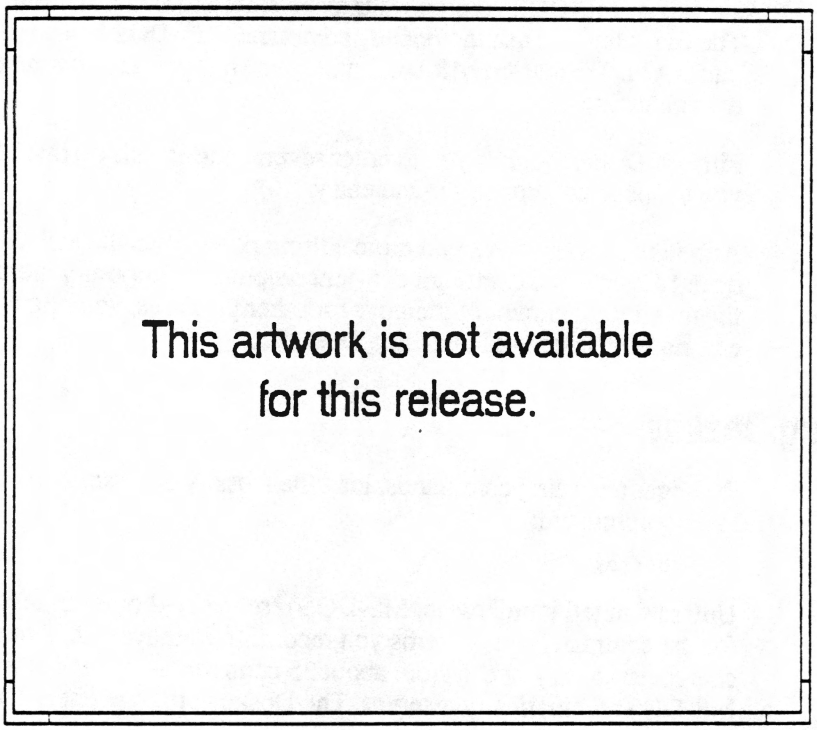

com_6

Finally, to copy the rest of the characters from the template to the display, press F3.

Using Doskey to Work with Commands

The doskey command starts the Doskey program, which you can use to display, edit, and execute MS-DOS commands you have entered previously. Doskey uses the MS-DOS command editing keys and adds other keys that make it very easy to reuse commands. With the template that was discussed in the previous section you

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

can reuse the last command you entered. With Doskey, you can reuse many of your previous commands (the exact number depends on how you set up Doskey).

In addition, you can create, run and save command *macros*. A command macro is a series of MS-DOS commands that are stored in RAM and run like a batch file. The first time you use the **doskey** command, MS-DOS loads the Doskey program into RAM. Thereafter, MS-DOS will save your previous commands and any macros you create.

Finally, Doskey allows you to enter several commands on one line. This enables you to speed up your command entry.

Although Doskey gives you more editing power than the MS-DOS editing keys, it does take up a small amount of your computer's temporary memory. If you need the maximum amount of memory for other purposes, you might want to use the editing keys instead of installing Doskey.

Installing Doskey

To begin recording commands, load the Doskey program into RAM with the following command:

```
doskey
```

Unless you tell it otherwise, MS-DOS reserves 512 bytes of temporary memory for the commands and macros you record. If your average command is 15 characters long, you can store about 35 commands with the amount of memory MS-DOS automatically reserves. The Doskey program itself occupies about 3K of memory.

If you want to reserve more or less memory, you can include the **/bufsize=** switch in the command. For example, to reserve 206 bytes of memory for recorded commands, enter the following command:

```
doskey /bufsize=206
```

If you enter more commands than can fit in the buffer you reserved, the oldest commands are removed from the buffer to make room for the newer ones.

To tell MS-DOS to reinstall Doskey after it has been installed once, use the **/reinstall** switch as in the following example:

```
doskey /reinstall
```

This option is useful if you want to use Doskey with a Microsoft Windows ® command prompt.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

Typing More than One Command On a Single Line

Normally, you type a single command on a line and then press ENTER to run the command. However, once you install Doskey, you can type as many commands on a single line as you like. To type more than one command on a line, you separate the commands by pressing CTRL+T. The CTRL+T character appears on your screen as a paragraph mark (¶).

For example, to delete all the files in the \TMP directory and then remove the directory you could enter the following two commands on the same line:

```
del \tmp\*.* ¶ rd \tmp
```

MS-DOS runs the **del** command and prompts you as usual to confirm the deletion. When the first command is complete, MS-DOS runs the second command.

You can type as many commands as you like on a line as long as the total line length does not exceed 128 characters.

Displaying Previous Commands

Once Doskey is loaded, it keeps a list of your commands as you enter them. To run a command again, you redisplay it and press ENTER. When you reuse a command, Doskey adds it to the end of the list again. You redisplay commands using the following keys:

To do this	Press this key
Display the list of commands Doskey has recorded.	F7
Display the previous command in the list.	UP ARROW
Display the next command in the list.	DOWN ARROW
Search the list of stored commands for one that begins with the text you type.	F8
Choose the number of the command you want to display.	F9
Display the oldest command in the list.	PAGE UP
Display the newest command in the list.	PAGE DOWN
Erase the command that is displayed.	ESC

For example, suppose you enter the following three commands after you load Doskey:

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

```
copy c:\word\*.doc c:\bakup\
dir c:\bakup\*.doc
del c:\word\*.doc
```

The three commands are saved and you can redisplay them using the keys in the preceding list. To display the full list of commands, press F7. Doskey displays a numbered list of the commands it has saved:

```
1: copy c:\word\*.doc c:\bakup\
2: dir c:\bakup\*.doc
3:>del c:\word\*.doc
```

The command that you most recently used or displayed is marked with a greater-than sign (>). This command is called the current command. When you move through the list, you start from the current command.

NOTE If there are more commands in the list than can fit on a single screen, Doskey pauses at the bottom of each screen of commands.

Displaying the Next or Previous Command

The first time you press the UP ARROW key, Doskey displays the current command. For example, if Doskey has stored the three commands shown in the previous section, and command number 3 is current, Doskey displays the following command the first time you press the UP ARROW key:

```
del c:\word\*.doc_
```

Doskey redisplays the command and positions the cursor at its end. You can reuse the command by pressing ENTER or you can edit the command using the keys described later in this chapter.

If you press the UP ARROW key more than once, Doskey displays commands further back in the list. To move backward in the list and display command number 2, you would press the UP ARROW key twice. Now, the current command is number 2. If you press the UP ARROW key again, Doskey displays command number 1 (the **dir** command). If you press the UP ARROW key once more, for a total of four times, Doskey jumps from the oldest command to the newest and displays the **copy** command again.

Likewise, to move forward in the list, press the DOWN ARROW key. For example, if the current command is number 2, the first time you press the DOWN ARROW key Doskey displays this command:

```
dir c:\bakup\*.doc_
```


niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

If you press the DOWN ARROW key again, Doskey displays command number 3. If you press the DOWN ARROW key a total of three times, Doskey jumps from the newest command to the oldest and displays command number 1.

Displaying the First or Last Command

To display the most recent command on the list, press PAGE UP. To display the oldest command press PAGE DOWN. For example, suppose Doskey has saved the following list of commands:

```
1: copy c:\word\*.doc c:\bakup\
2: dir c:\bakup\*.doc
3: del c:\word\*.doc
```

If you press PAGE UP, Doskey displays the following command:

```
del c:\word\*.doc_
```

If you press PAGE DOWN, Doskey displays this command:

```
copy c:\word\*.doc c:\bakup\_
```

Displaying Other Commands in the List

To choose a specific command from the list that Doskey has saved, use the F9 or F8 key. Use F9 to display a line by typing its number. For example, suppose Doskey has saved the following list of commands:

```
1: a:
2: dir
3: c:\myuts\figdsk a: time=30 space=35.8
4: dir 5: del *.tmp
```

If you want to use command number 3 again, you can display it using the ARROW keys or by pressing F9. When you press F9, Doskey asks you which line you want to display:

```
Line number:
```

To redisplay line 3, enter 3.

You can use F8 to display a line by typing the first few characters of the command. For example, to display the command that begins with C:\, type C:\ at the command prompt and then press F8.

When you press F8, Doskey searches through the list for a command that begins with the letters you typed. If it doesn't find a matching command, nothing happens. If Doskey finds a command that matches, it displays it.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

If you press F8 again, Doskey finds the next oldest command that begins with the characters you typed.

Editing and Reusing Previous Commands

As you type a new command, or after you display a previous command, you can use command editing keys to change the command. You can use the same command editing keys with Doskey as you use with the command template described in Using Command Editing Keys, earlier in this chapter. When you use some of these keys with Doskey, however, you see slightly different results. Doskey also provides a number of other command editing keys that make it very easy to change a command you typed previously.

The following table describes the additional Doskey editing keys as well as the effect you see when you use some of the standard MS-DOS command editing keys:

To do this	Press these keys
Move the cursor to the beginning of the displayed command.	HOME
Move the cursor to the end of the displayed command.	END
Move the cursor back one character in the displayed command.	LEFT ARROW
Move the cursor forward one character in the displayed command.	RIGHT ARROW
Move the cursor back one word in the displayed command.	CTRL+LEFT ARROW
Move the cursor forward one word in the displayed command.	CTRL+RIGHT ARROW
Delete the character before the cursor.	BACKSPACE
Delete the character above the cursor.	DEL
Delete all characters from the cursor to the end of the line.	CTRL+END
Delete all characters from the cursor to the beginning of the line.	CTRL+HOME
Add characters at the position of the cursor.	INS
Erase the displayed command.	ESC

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

Most of these keys function exactly as you might expect. The editing keys affect only the command that is displayed. They do not change any of the commands that Doskey has already stored.

If you hold down the CTRL key while you press the RIGHT ARROW or LEFT ARROW key, the cursor moves to the beginning of the next or previous word. A word in this case is a group of characters that are separated from other characters by a space. For example, the following command has three words:

```
copy c:\games\suzz.exe a:_
```

If the cursor is at the end of the line, as is shown in the example, you can move it to the C in C:\GAMES\SUZZ.EXE by pressing CTRL+LEFT ARROW twice.

With the cursor anywhere in the word C:\GAMES\SUZZ.EXE you can move the cursor to the last letter by pressing CTRL+RIGHT ARROW. If you press CTRL+RIGHT ARROW again, the cursor moves to the end of the line.

By pressing the INS key, you can add characters at the position of the cursor. If you don't use the INS key, the new characters you type will overtype any characters that follow the cursor. After you press INS the characters that follow the cursor are moved right as you type. For example, suppose you have the following line displayed:

```
copy c:\games\suzz.exe a:
```

The cursor is under the S in SUZZ.EXE. To change the line so that C:\GAMES\SUZZ.EXE becomes C:\GAMES\NEW\SUZZ.EXE you press the INS key and type NEW\. The line now appears like this:

```
copy c:\games\new\suzz.exe a:
```

To turn off insert mode, pressthe INS key again. The characters you type will once again overtype any characters in front of the cursor. Insert mode is automatically turned off when you press ENTER to run a command.

Saving and Clearing the List of Stored Commands

Anytime you want to delete the whole list of stored commands and begin a new list, you can press ALT+F7. The list of commands is also cleared when you reinstall Doskey or reset your computer.

To save the list in a file, you can enter the **doskey** command with the **/dhist** switch, the output redirection character (>), and the name of the file where you want the list stored. For example, to store your list of commands in the SAVCOMMS.TXT file, enter the following command:

```
doskey /dhist >savcomms.txt
```


niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

This is particularly useful for creating a batch file. To create a batch file using Doskey, press ALT+F7 to clear the list of commands from Doskey, enter the commands you want to save, and then use the **/dhist** switch to save the commands in a file with a .BAT extension. For more information about batch files, see "XX".

Using Doskey to Create Macros

A macro is a set of commands that you can quickly run by typing the name of the macro. Macros are very much like batch files. Both contain sets of commands that you run by typing a name. However, macros differ from batch files in the following ways:

- Macros are stored in RAM, while batch files are stored on disk. Because macros are stored in RAM, they run much faster than batch files. Unlike batch files, you can run a macro from any directory without worrying about where the macro is located. On the other hand, when you reset or restart your computer, the macros you have in RAM are lost, while the batch files on disk are unharmed.
- You create a batch file by saving commands in a file. You create a macro by putting commands inside a macro definition. In a batch file, you separate commands by putting them on separate lines. There is no limit to the number of commands you can put in a single batch file. In macros, you type all the commands on the same line and separate them with special characters. The total length of a macro cannot exceed 127 characters.
- You can stop a batch file by pressing CTRL+C once. In a macro, you must press CTRL+C repeatedly. Each time you press CTRL+C in a macro, MS-DOS skips one command. To stop the entire macro, you must press CTRL+C once for every command left in the macro.
- In both batch files and macros you can use replaceable parameters. However, in batch files the parameters are **%0** through **%9**, and in macros they are **$0** through **$9**. In addition, the redirection characters you use in macros are different from those you use in batch files and MS-DOS commands.
- In batch files, you can use **goto** commands to jump to another place in the file. In addition, you can start other batch files from inside a batch file. You cannot use **goto** commands in a macro or start other macros inside a macro.
- You can run a batch file from inside a macro, but you can't run a macro from inside a batch file (however, you can include a command that *creates* a macro inside a batch file) .

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

- You can't use the **echo off** command inside a macro to stop the commands from being displayed as MS-DOS runs them.

Macros work well *inside* batch files. Because you have to run a macro definition command to load a macro into RAM, the most useful way to use macros is to put the definition commands for the macros that you commonly use inside a batch file. Then, to make the macros available, you run the batch file.

Creating Macros

To create a macro, you enter a **doskey** command that includes the name of the macro and the commands that are in the macro. For example, the following command creates a macro called DDIR that displays a directory in wide format:

```
doskey ddir=dir /w
```

When you type DDIR at the command prompt, MS-DOS runs the macro, displaying a five-column list of the files in the current directory. Because the macro is stored in RAM, it doesn't matter which directory is current when you run it.

To include more than one command in a macro, separate the commands with a dollar sign ($) and the letter T. For example, the following command creates a macro called CMP that alphabetizes and lists the .DOC files and then the .BAK files in the current directory:

```
doskey cmp=dir *.doc /o:n $t dir *.bak /o:n
```

While you are creating and testing a macro, it is easiest to enter the command that defines the macro at the command prompt. Then, you can use the Doskey command editing keys to quickly change and redefine the macro.

Because the macros you define are stored in RAM, when you turn your computer off or reset it, the macros you defined are lost. Thus, if you create a macro that you will commonly use, instead of entering the command to define the macro each time you start or reset your computer, you can put the command that defines the macro in your AUTOEXEC.BAT file to automatically define the macro each time MS-DOS starts.

Running Macros

To run a macro, you enter its name at the command prompt. For example, to run the DDIR macro, enter the following command at the command prompt:

```
ddir
```


niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

If the macro takes parameters, separate them from the name of the macro with a space. For example, suppose you create a macro called MOVE that needs to know which file you want to move and the name of the directory to which you want to move the file. To move all *.TXT files from the current directory to the C:\TFILES directory, you would enter a command like this:

```
move *.txt c:\tfiles
```

You cannot run a macro from inside a another macro or from inside a batch file.

When you enter the name of a macro, there must be no space between the command prompt and the macro name. Otherwise, MS-DOS will not recognize the name and will display a "Bad command or file name" message.

You can use this requirement to your advantage if you want to create a macro that has the same name as a command. For example, suppose you generally like your directories displayed in five-column format. you can use the following command to create a macro called DIR that replaces the MS-DOS **dir** command:

```
doskey dir=dir /w
```

When you have a macro with the same name as a command, MS-DOS will always run the macro rather than the command. So when you enter DIR at the command prompt, MS-DOS will always run the DIR macro rather than the **dir** command.

Whenever you want to use the **dir** command instead of the DIR macro, you can type a space between the command prompt and the word DIR. Now, MS-DOS does not recognize DIR as a macro name, but it does recognize it as a command. If you have a macro and command with the same name, you can type one or two spaces before the name to run the command instead of the macro.

Displaying Macros

To display the names and contents of the macros you have created, press F10. Doskey displays a list of the macros you have created. The redirection characters are displayed as their regular characters. Command separators are displayed as paragraph marks.

Editing Macros

To edit a macro, edit the command that created the macro and run it again. If the macro is inside a batch file, you can edit the command and then run the batch file again. If the macro command is in the list of commands that Doskey saves, you can redisplay the command, edit it with the Doskey command editing keys and

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

then press ENTER to create the new macro. For information about the Doskey command editing keys, see xx, earlier in this chapter.

Saving Macros

There are two ways to save macros that you created at the command prompt: you can save the entire command that created the macro or you can save just the macro's name and contents. The first method uses the **/hist** switch and saves all the commands in the Doskey list. The second uses the /dmacs switch and saves all of the macros currently stored by Doskey in memory.

If the commands that created the macros are in your Doskey list, you can save them by using the **doskey** command with the **/hist** switch, the greater-than sign (>), and a filename. For example, the following command saves your Doskey list of commands in the COMLIST.TXT file:

```
doskey /dhist >comlist.txt
```

Once the commands are saved, you can run them again in a batch file. For example, suppose you want to run three of the macro commands stored in COMLIST.TXT. You could use a text editor to move the three commands into a batch file. Then whenever you want to use the macros, you run the batch file. If you develop a set of macros that you use often, you could put the commands that create them in your AUTOEXEC.BAT file so that they are run each time you restart or reset your computer.

To save the content of the macros stored in memory, use the **doskey** command with the **/dmacs** switch, a greater-than sign (>), and a filename. This also translates some of the special macro characters into regular MS-DOS characters. For example, the following command stores the name and content of the macros that are currently in RAM in the MACS.TXT file:

```
doskey /dmacs > macs.txt
```

Once the macros are in the file, you can easily turn one or more of them into a batch file by putting each command on its own line and changing the replaceable parameters to match the batch file format.

Deleting Macros

To delete a macro, enter a **doskey** command with the name of the macro you want to delete. For example, to delete the DDIR macro, you would enter the following command:

```
doskey ddir=
```


niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

Doskey removes the macro from memory. To delete all macros, press ALT+F10.

Using Replaceable Parameters

You can use replaceable parameters in your macros in much the same way you use them in batch files. In macros, the replaceable parameters are called **$0** through **$9** rather than %0 through %9.

For example, the following command creates a macro called FINDIT that searches through the directories on drive C for files that match the one you specify:

```
doskey findit=dir c:\$1 /s
```

To run this macro, enter FINDIT and a filename at the command prompt. For example, to locate all files on drive C that have the extension .OLD, you would enter the following command:

```
findit *.old
```

Doskey substitutes the filename you type for the **$1** in the macro. The resulting command looks like this:

```
dir c:\*.old /s
```

The /s switch tells MS-DOS to display files from all the directories on drive C (including the current directory) that match *.OLD.

You can use the same parameter more than once in a macro. For example, the following command creates a macro called DDEL that moves a file to a directory called DELETED rather than actually deleting it:

```
doskey ddel=copy $1 c:\deleted $t del $1
```

When you start the DDEL macro, you also type the name of the file you want to delete. Doskey replaces the $1 in the macro with the filename. It copies the file to another directory and then deletes it from its original directory. This gives you a second chance to recover the file if you discover later that you really needed it.

Periodically, you can clean out the C:\DELETED directory with this macro:

```
doskey cleanup=dir c:\deleted $t del c:\deleted\*.*
```

The macro displays the DELETED directory and then starts the command that will delete all the files in the directory. Because the **del** command automatically prompts you to confirm that you want to delete all the files, you have a chance to review the list of files and decide whether you want to delete them.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

Using the $0 Replaceable Parameter

The **$0** parameter allows you to assign all of the text following the command that starts a macro to a single parameter. Normally, MS-DOS distinguishes parameters by looking for a space. It assumes that the text between the first two spaces is the first parameter, the text between the second and third spaces is the second parameter, and so on. If you use the **$0** parameter, Doskey ignores spaces and assigns all of the text to the **$0** parameter.

The **$0** parameter is most useful when the macro you create should function with a variable number of parameters. For example, you can use the following command to create macro called D that allows you to abbreviate the **dir** command:

```
doskey d=dir $0
```

This macro will work exactly like the **dir** command regardless of the number of parameters you specify. For example, all the following commands will run the same with the D macro as they do with the **dir** command:

```
d *.txt
d *.txt /s
d *.txt /s /b
```

If you used any parameter other than **$0** with the macro, MS-DOS would assign *.TXT to the parameter and ignore the rest of the command line.

Redirecting Input and Output

You redirect input and output in macros the same way you redirect it in MS-DOS commands. The only difference is that macros require different characters:

- **$L** (or $l) is equivalent to the less-than sign (<). It redirects the input to a command.
- **$G** (or $g) is equivalent to the greater-than sign (>). It redirects the output of a command.
- **GG** (or gg) is equivalent to the double greater-than sign. It appends output onto the end of a file.
- **$B** (or $b) is equivalent to the pipe character (|). It redirects output from one command to another.

For example, the following command creates a macro called PDIR that prints your directory listings:

```
doskey pdir=dir $g Lpt1:
```


niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

The following command creates a macro called MTYPE that displays the contents of the file you specify and pauses between each screen of information:

```
doskey mtype=type $1 $b more
```

The following command creates a macro called ASORT that alphabetizes the file you specify and stores it in a different file:

```
doskey asort=sort $L $1 $g $2
```

When you start this macro, you type the name of the file you want to sort. Doskey replaces the **$1** replaceable parameter with the first filename you enter. The **$L** redirects the file into the **sort** command. The **$g $2** redirects the output of the sort command into the second filename you enter.

Because the dollar sign ($) is such a significant character in macros, you have to mark it when it occurs anywhere other than in parameters, command separators, and redirection characters. You mark extra dollar signs by typing two of them rather than one. For example, suppose your macro copies a file to the $&CENTS directory. When you type the name of the directory you must type $$&CENTS. That way when Doskey runs the command, it knows to take the dollar sign as a regular character rather than a marker or parameter.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

Chapter 9

The Shell Program Manager

The Shell Program Manager is designed to arrange and run programs. It enables you to display the programs you use, add and delete programs, subdivide programs into smaller groups, and run a program with the click of a mouse or a few keystrokes.

You can organize your programs into groups. Groups are collections of programs somewhat like directories. They allow you to gather your programs so you can easily access them. For example, you might put three different financial programs into a single group, so you can work easily with any of them. When you add a group, you give it a title, which appears on the File Manager screen. To work with the group you choose its title.

Before you can run a program with the Program Manager, you must add it to a group. When you add a program to a group, you give it a title and type the command that starts the program. If you want, you can create a dialog box that prompts you for information each time you start the program. To run the program, you choose its title from the group list it appears on.

Working with Groups

Groups are similar to directories in that they allow you to gather together similar files. Groups are a way to organize your programs without worrying about where they are stored. The files in a group can be stored in any directory on any of your computer's disks. The programs themselves are not moved or in any way changed when you add them to a group. All commands for managing groups are in the Group menu of the Program Manager screen.

When you first start the Shell, the Program Manager screen displays the Main group. The Main group contains three programs: DOS Command Prompt, File Manager, and Change Colors. The Main group also contains any other groups and programs that you have added to it.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

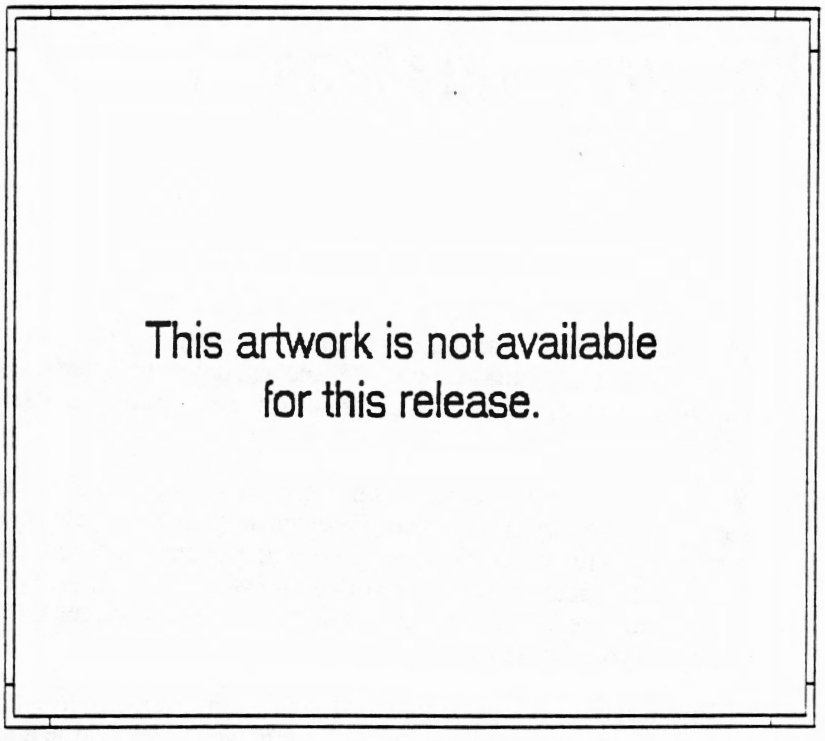

spm_1

The Program Manager's Main group is like the root directory of a disk. Every other group, including the DOS Utilities group, is a subgroup of the Main group. You can create a group as a subgroup of the Main group or as a subgroup of another group. For example, you can create two subgroups of the DOS Utilities Group; one that contains file utilities, and one that contains directory utilities. The following figure illustrates this relationship:

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

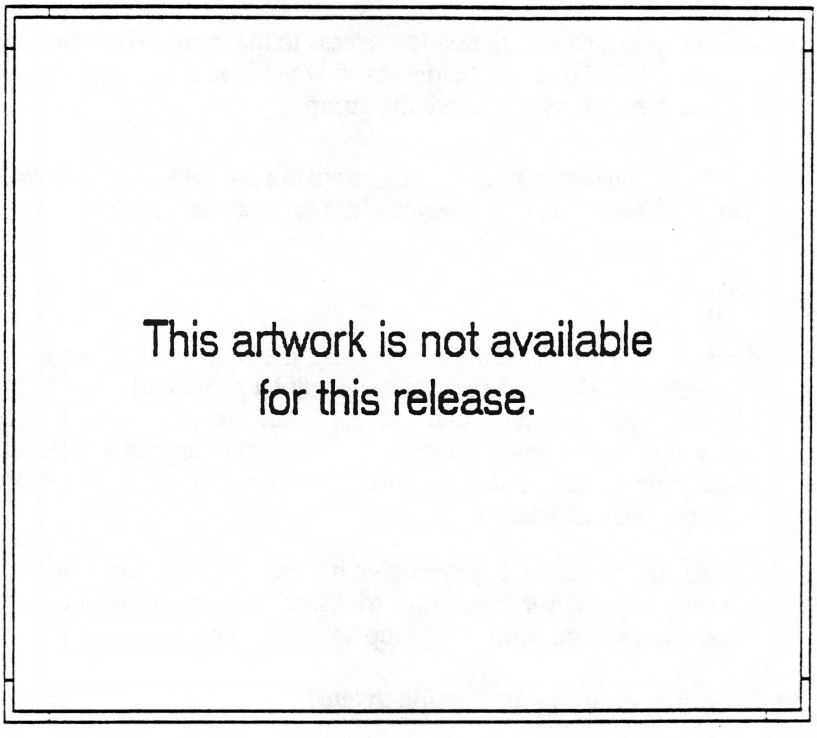

spm_2

A group can contain any number of other groups and programs. The titles of the programs and subgroups in a group are displayed on the *group list*. If the Shell is in text mode, groups are shown with three dots (. . .) after their names to distinguish them from programs. If the Shell is in graphics mode, groups are labeled with a group icon.

To work with a group, choose the group's title. To move backward from a subgroup to a group, press ESC.

In addition to a title, you can assign each group a password and a help message:

- The group help message contains information about using the group and its programs. When you select a group title, you can display the group's help message by choosing xx from the Help menu or pressing F1. MS-DOS displays help messages in a dialog box.

- The group password restricts access to the group. If a group has a password, MS-DOS displays a dialog box in which you must enter the password before you can display or change the group.

NOTE If you decide to assign a password to a program, be sure to write it down and keep it in a safe place. There is no way to display a password once it has been assigned.

Adding a Group

You can add groups to the Main group, the DOS Utilities group, or a group you have created. For example, you might add a group called ACCOUNT if you have three different programs that you use to keep track of your finances (such as a program to maintain your checkbook, a program to estimate taxes, and a program to track your monthly bills). By putting the three programs in a group, you can move between them efficiently.

When you create a group, you give it a title. If you want, you can also give it a password that a user must know to display the group, and a help message that provides information about the group and its programs.

▶ To add a group to an existing group:

1. Display the group to which you want to add the new group.
2. Choose Add from the Group menu.
   MS-DOS displays the Add Group dialog box.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

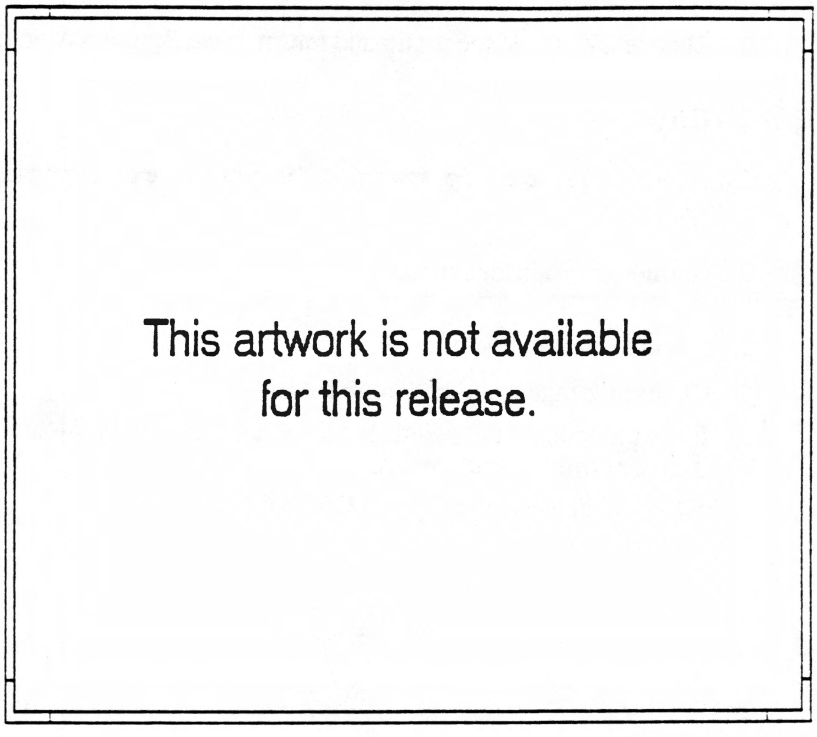

spm_3

3. Type a title for the new group.

   The title can be up to 74 characters long.

4. If you want the group to have a help message, type up to 256 characters (including blanks) in the Help text box. For example, you might type a help message that says, "Use the programs in this group to perform statistical operations." MS-DOS displays the message exactly as you type it and formats it to fit in the Help dialog box. If you want to begin a new line, type an ampersand (&) at the point where you want the new line to start.

   If you don't want the group to have a help message, leave the box blank.

5. If you want the group to have a password, type it in the Password box. Passwords must be less than 256 characters long.

   If you don't want to assign a password, leave the box blank.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

6. Choose OK to add the group and return to the Program Manager screen.

Changing a Group

You can change the title, password, or Help message of any group except the Main group.

▶ To change group information:

1. Select the group title.
2. Choose Change from the Group menu.

   If the group has a password, MS-DOS displays the Password dialog box. Type the password and choose OK.

   MS-DOS displays the Change Group dialog box.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

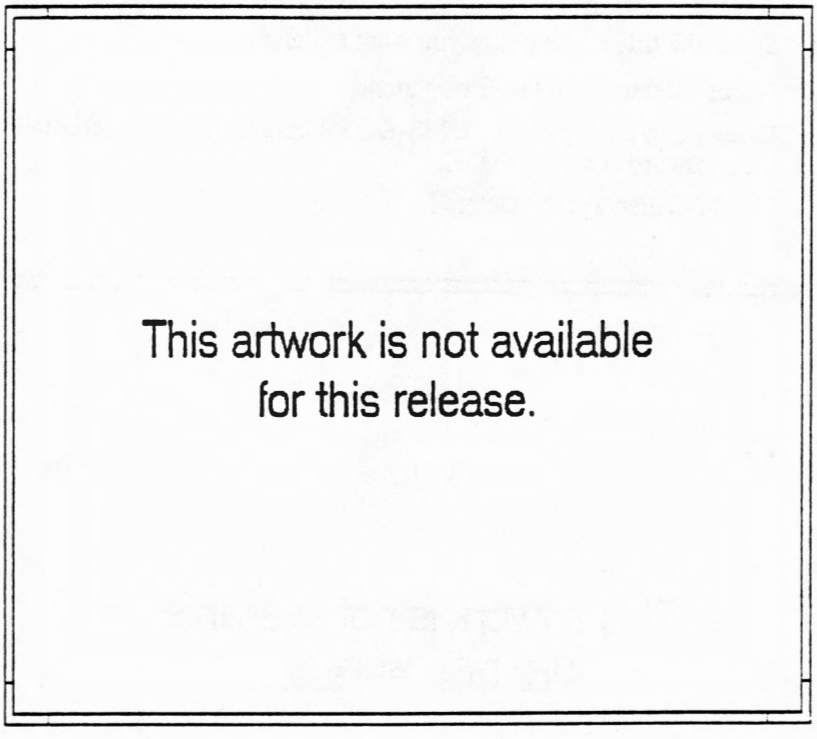

spm_4

3. Change whatever information you want.
4. Choose OK to save the changes and return to the Program Manager screen.
   You cannot save the changes if the Title box is not filled in.

Deleting a Group

When you delete a group, the group name is removed from the list it appeared on and the group's password and help message are deleted. The programs in the group remain in the directories where they are stored, but they are no longer accessible from this group of the Shell.

▶ **To delete a group:**

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

1. Select the title of the group you want to delete.
2. Choose Delete from the Group menu.

   If the group has a password, MS-DOS displays the Password dialog box. Type the password and choose OK.

   MS-DOS displays the Delete Item dialog box.

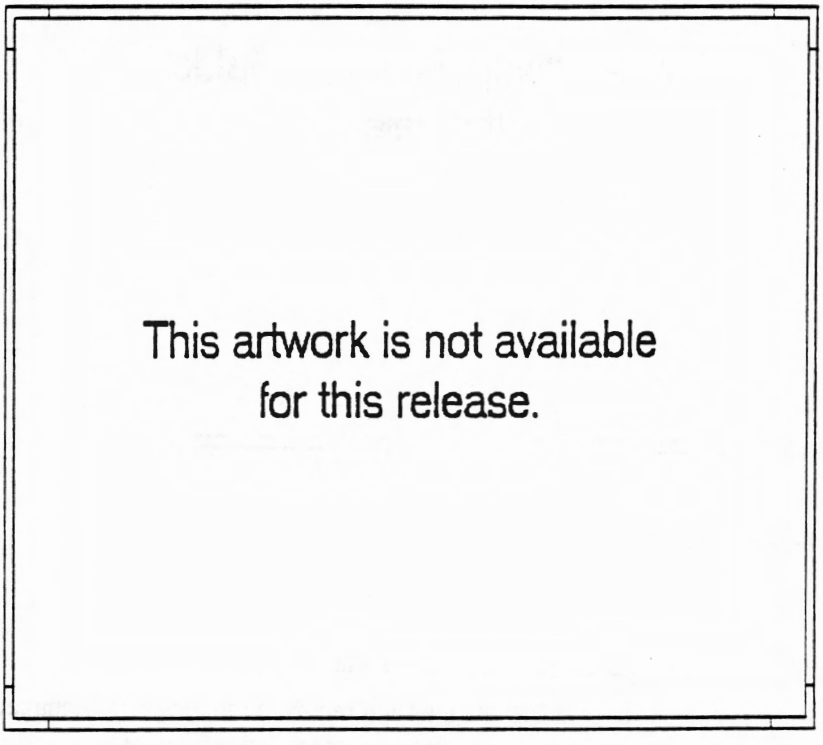

spm_5

3. Choose option 1 to delete the group and return to the Program Manager screen.

   Or choose option 2 to return to the Program Manager screen without deleting the group.

Reordering a Group List

To move a program or group title from one position in a group list to another, use the Reorder command.

▶ **To reposition a title:**

1. Select the title you want to reposition.
2. Choose Reorder from the Group menu.
3. Move the selection cursor to the new location and press ENTER.
   MS-DOS repositions the title and returns you to the Program Manager screen.

Working with Programs

You can use Program Manager to make programs easy to start. By adding your programs (including MS-DOS commands and batch files) to a group, you can avoid having to remember where they are stored, and what special commands or parameters you need to start them. To run a program from a group list, you choose its title. The Program menu contains the Shell commands that manage programs. For more information about running programs from the Shell, see xx.

Adding a Program to a Group

When you add a program to a group, you give it a title and type the command you need to start the program. Along with the command, you can specify MS-DOS commands or batch files to run before or after the program, and you can have MS-DOS display a custom dialog box.

When you add a program, you can also specify the following information:

- A directory that MS-DOS should make current before starting the program.
- A help message that presents information about the program and how to run it. Help messages appear when you select a program from a group list and choose xx or press F1.
- A password to restrict access to the program. If a program has a password, you must enter it before you can run the program or change any of the information you assigned to it.
- An option that tells MS-DOS to pause before returning to the Shell when the program finishes.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

NOTE If you decide to assign a password to a program, be sure to write it down and keep it in a safe place. There is no way to display a password once it has been assigned.

You can add programs to the Main group, the DOS Utilities group, or a group you have created.

▶ To add a program to a group:

1. Display the group list you want to add the program to.
2. Choose Add from the Program menu.
   MS-DOS displays the Add Program dialog box.

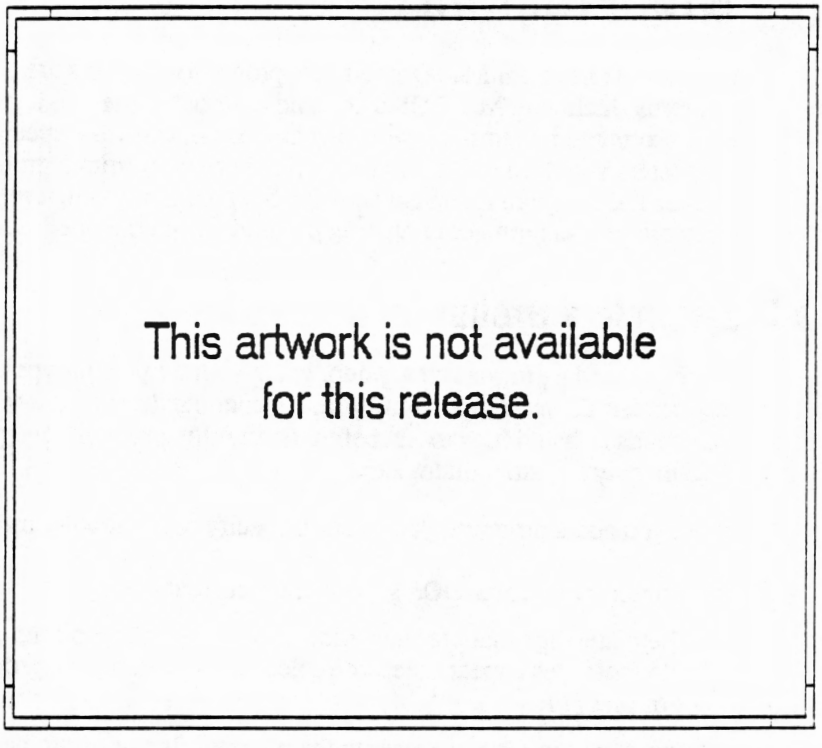

spm_6

3. Type the name that you want to appear on group lists in the Title box.

   Titles can be 74 characters long, including blank spaces.

4. Type the command that starts the program in the Commands box.

   The command you type in this box is called the startup command. Before you can add the program to a group, the startup command must contain at least a single command to start the program.

   You can assume that the command you type in the Commands box starts from the Startup directory you specify.

   In addition to the command that starts the program, you can add other MS-DOS commands to the startup command and you can create a custom dialog box that prompts you for parameters. For more information, see xx.

5. If you want MS-DOS to change the current directory before it starts the program, type the name of the directory you want to change to in the Startup directory box.

   This option is useful if the program you are running assumes that a certain directory is current.

6. If you want the program to have a help message, type up to 256 characters (including blanks) in the Help Text box.

   MS-DOS displays the message exactly as you type it and formats it to fit in a Help dialog box. If you want to begin a new line, type an ampersand (&) at the point where you want the new line to start.

   If you don't want the program to have a help message, leave the box blank.

7. If you want the program to have a password, type it in the Password box. Passwords must be less than 256 characters long.

   If you don't want to assign a password, leave the box blank.

8. If you want MS-DOS to pause and prompt you to press a key before returning to the File Manager screen, select the Pause After Exit option.

   This option is useful if you want to read any text that your program displays after it finishes running.

9. Choose OK to add the program to the group you selected.

   If there are any replaceable parameters in your startup command, MS-DOS displays a dialog box for each parameter. Choose OK to accept the information that is displayed, or edit the information in these boxes and then choose OK.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

Changing a Program

After you add a program to a group, you can change the name of the program, the startup command, the help text, or the program's password.

▶ To change program information:

1. Select the title of the program you want to change.
2. Choose Change from the Program menu.

   If the group has a password, MS-DOS displays the Password dialog box. Type the password and choose OK.

   MS-DOS displays the Change Program dialog box.

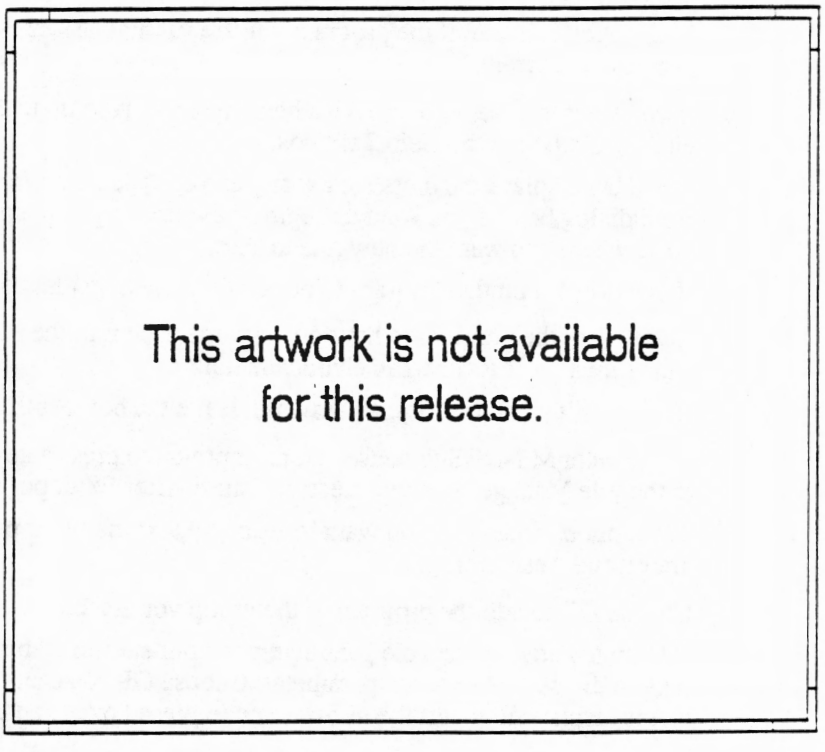

spm_7

3. Make the changes you want to the information in the box then choose OK to save the changes.

   MS-DOS will not save the changes if the title box is not filled in, or if you press ESC. If there are any replaceable parameters in your startup command, MS-DOS displays a dialog box for each parameter. Choose OK to accept the information that is displayed, or edit the information in these boxes and then choose OK.

Removing a Program from a Group

If you remove a program from a group, MS-DOS no longer displays its title, and the information you entered for the program is deleted. Removing a program from a group does not delete the program from the directory that contains it.

▶ To delete a program title from a group:

1. Select the title of the program you want to delete.
2. Choose Delete from the Program menu.

   If the group has a password, MS-DOS displays the Password dialog box. Type the password and choose Ok.

   MS-DOS displays the Delete Item dialog box.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

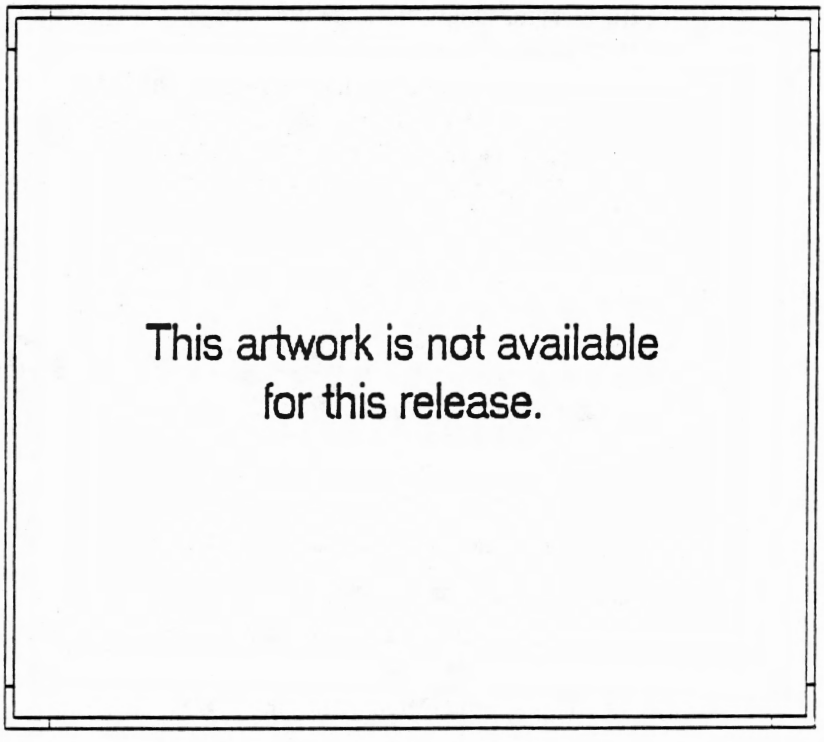

spm_8

3. Choose option 1 to remove the program from the group and return to the Program Manager screen.

   Or choose option 2 to return to the Program Manager screen without removing the program.

Copying a Program

To move a program from one group to another or to have a program in more than one group, you use the Copy command. For example, if you use Microsoft Excel with your accounting programs and with your tax programs, you might copy the program to your Accounting group and your Tax group. You can copy a program to as many groups as you like.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

▶ To copy a program from one group to another:

1. Select the title of the program you want to copy.
2. Choose Copy from the Program menu.

   If the group has a password, MS-DOS displays the Password dialog box. Type the password and choose OK.
3. Display the group list of the group you want to copy the program to.
4. Choose OK to copy the program and return to the Program Manager screen.

   Or choose Cancel to return to the Program Manager screen without copying the program.

Creating Startup Commands for Your Programs

When you add a program to a group on the Program Manager screen, you type a startup command in the Commands box of the Add Program dialog box. A startup command contains the command you use to start a program plus any other commands you want to run before and after your program. The startup command runs just like a batch file. MS-DOS runs each command in sequence. When all of the commands in the startup command are finished, MS-DOS returns you to the Program Manager screen.

For example, suppose you want to add the program C:\EDIT\WORD.EXE to the Editor group. First, you display the Editor group and choose Add from the Program menu. Then you give the program a name and type the following command in the Commands box:

```
c:\edit\word
```

The command includes the pathname of the file as well as its name, so that MS-DOS can find the file.

The startup command can contain any number of valid MS-DOS commands. The maximum length of the text in the Commands box is 500 characters. To include more than one MS-DOS command in a startup command, you separate the commands with semicolons.

For example, to change the current directory to the root of drive C after you exit from WORD, but before MS-DOS returns you to the Program Manager screen, you would include a **cd** command in the startup command as in the following example:

```
c:\edit\word ; cd \
```


niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

You cannot include spaces, but you can include one or more spaces before and after the semicolons. MS-DOS runs the commands you type in sequence. In this case, it runs WORD.EXE first. When WORD.EXE ends, MS-DOS runs the **cd** command. When the **cd** command ends, MS-DOS returns you to the Shell Program Manager screen.

Using the Startup Directory Box

Sometimes it is preferable to change the current drive and directory before you start a program. To accomplish this task in a startup command, you would have to type three commands: one to change the drive, one to change the directory, and one to start the program. Alternatively, you can set the directory by typing the directory in the Startup directory box and the startup command in the Commands box as in the following example:

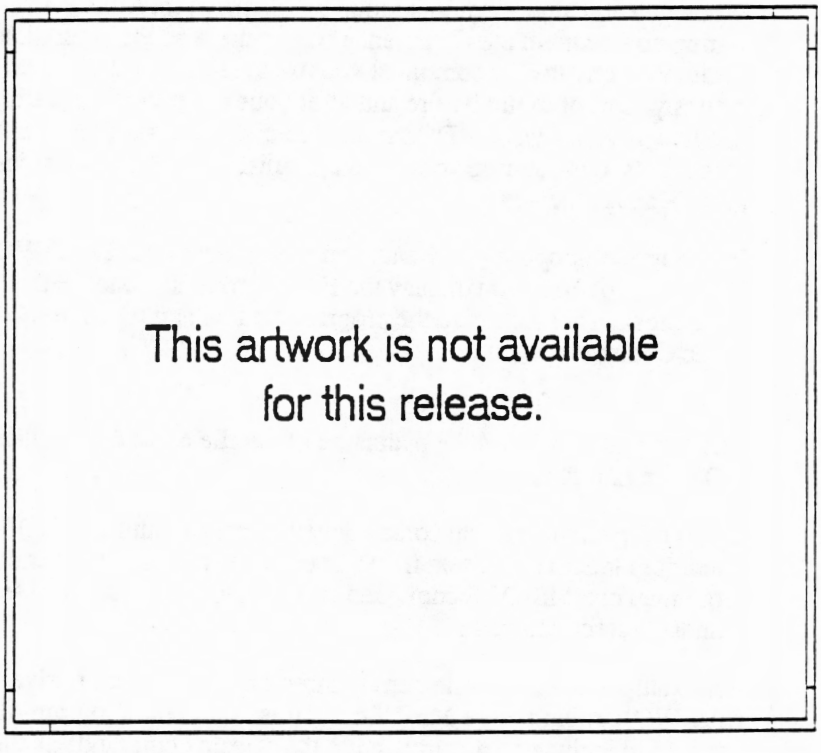

spm_9

Running Batch Files in a Startup Command

You can run batch files by including **call** commands in the startup command. For example, to run the PREP.BAT batch file before you enter WORD, and the POST.BAT batch file after you exit the program, enter the following startup command:

```
call prep ; word ; call post
```

For more information about batch files, see Chapter 11, "Working with Batch Files".

Using Parameters

If the programs you add to a group take parameters, MS-DOS displays a dialog box that prompts you for them when you start the program. For example, suppose you often start Word by changing to its directory and then typing a filename along with the command that starts the program as in the following example:

```
c:\edit\word turn.doc
```

By adding a replaceable parameter to your startup command, you can have MS-DOS display a dialog box that prompts you for the filename. Replaceable parameters are the symbols **%0** through **%9**. You use them to stand in for the parameter that you enter in the dialog box. For example, if you want MS-DOS to prompt you for a filename when you start C:\WORD\WORD.EXE, you could use the following startup command:

```
c:\edit\word %1
```

The **%1** substitutes for the filename you normally enter when you run the program. The replaceable parameter tells MS-DOS to display a dialog box and use what you type in the dialog box as the filename of the file you want to edit.

When you enter a startup command that includes a replaceable parameter, MS-DOS displays the following dialog box where you can enter a title, an informational message, and a prompt for the parameter's dialog box:

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

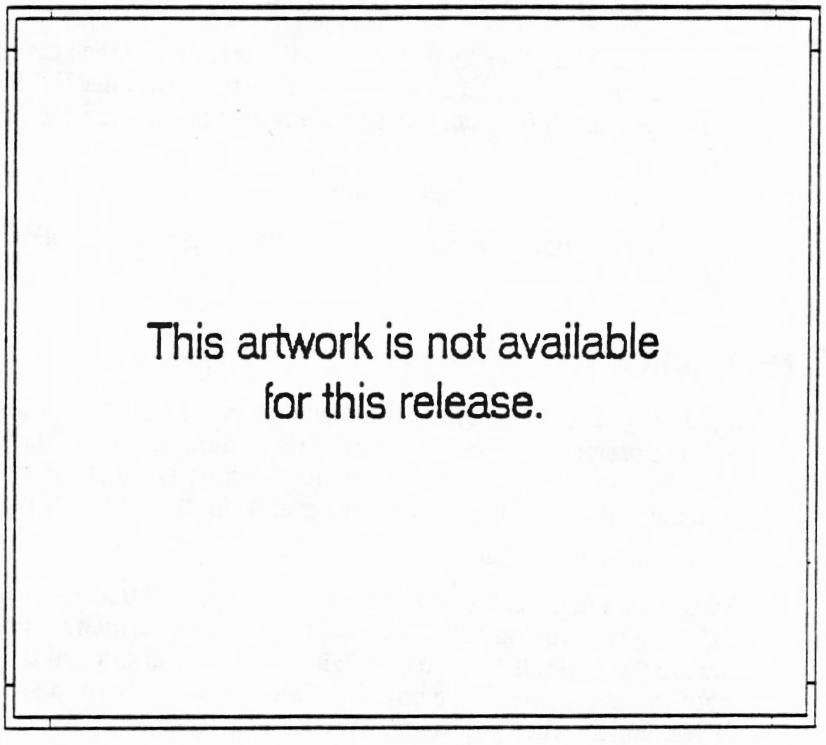

spm_10

Type the information that you want MS-DOS to display in the parameter's dialog box. If you don't type any information, MS-DOS displays this generic dialog box when you start the program:

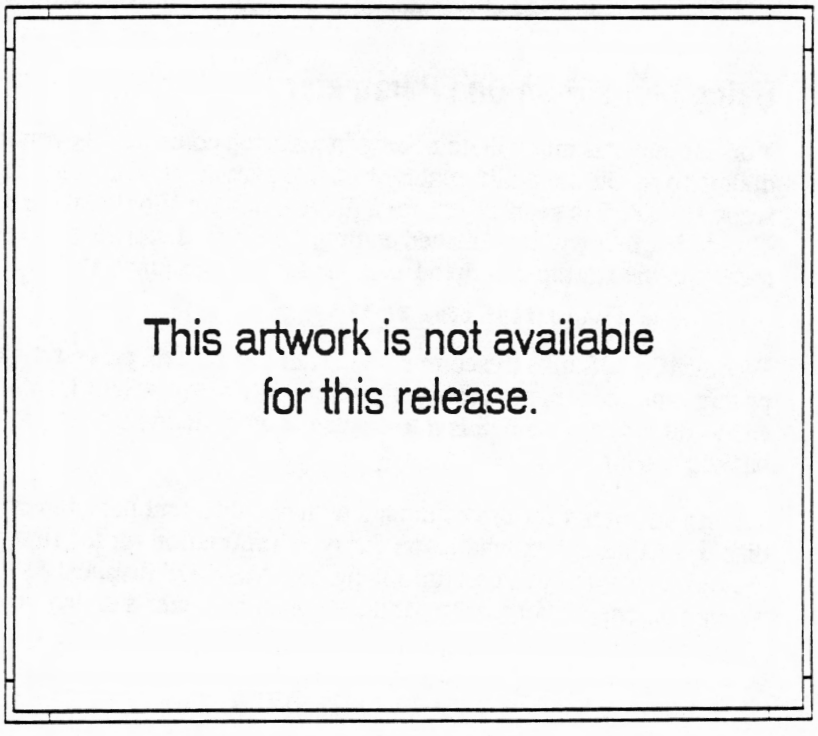

spm_11

Using the Same Parameter Twice

You can use a single replaceable parameter more than once in a startup command. For example, suppose you always back up new Word files to the A drive after you have created them. To start Word with URN.DOC and then back up the file after you have edited it, you would enter the following commands:

```
c:\edit\word patko.doc
copy patko.doc a:
```

To make a single startup command that performs these tasks, you can use the %1 replaceable parameter in two places as in the following example:

```
c:\edit\word %1 ; copy %1 a:
```


niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

Using More Than One Parameter

You can have as many dialog boxes in a startup command as you like. For each dialog box, you use a different replaceable parameter. For example, suppose you want MS-DOS to prompt you for a file to edit with Word and for a backup directory when you are finished editing. You would include two replaceable parameters in the startup command as in the following example:

```
c:\edit\word %1 ; copy %1 %2
```

When MS-DOS runs the command to start Word, it displays a dialog box to prompt you for a file to edit (**%1**). After you exit from Word, MS-DOS runs the **copy** command, which tells it to display another dialog box to prompt you for a backup directory (**%2**).

When you enter a startup command with two different parameters, MS-DOS first displays a dialog box where you can type information for the first parameter's dialog box. When you exit this dialog box, MS-DOS displays a second dialog box where you enter information for the second parameter's dialog box.

niklasb • Wed May 16 17:53:36 1990 • MICROSOFT CONFIDENTIAL

Chapter 10

Working with the MS-DOS Editor

Edit is an MS-DOS text editor that is useful for creating memos, letters, and special files that customize MS-DOS. You can use Edit to create and edit text, save the text in a file, modify existing files, and print files.

Files you create with Edit are unformatted text files. Since MS-DOS batch files and files such as AUTOEXEC.BAT and CONFIG.SYS must be unformatted text files, Edit is a particularly useful tool for customizing your system.

You can use a keyboard or a mouse to work with Edit.

Those who have used the Edlin line editor in previous versions of MS-DOS will still find it in MS-DOS 5.0. For information about specific Edlin commands, see the alphabetical command listing in part I of the *MS-DOS 5.0 User's Reference*.

When you use Edit, you can:

- Choose commands from menus and specify information and preferences in dialog boxes.
- Move around in a text file using cursor movement keys, view the text of a file at all times, and see changes as you make them.
- Select text in a file and move, copy, or delete it.
- Use Edit's extensive on-screen help system to find information about Edit techniques and commands.

Getting Started with Edit

You start Edit by entering the **edit** command at the command prompt. If you want to open a file in Edit when you start it, you can include the filename in the command. For example, if you want to open the file named PROGRAM.TXT, you enter:

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

```
edit program.txt
```

When you enter the **edit** command alone, the following screen appears:

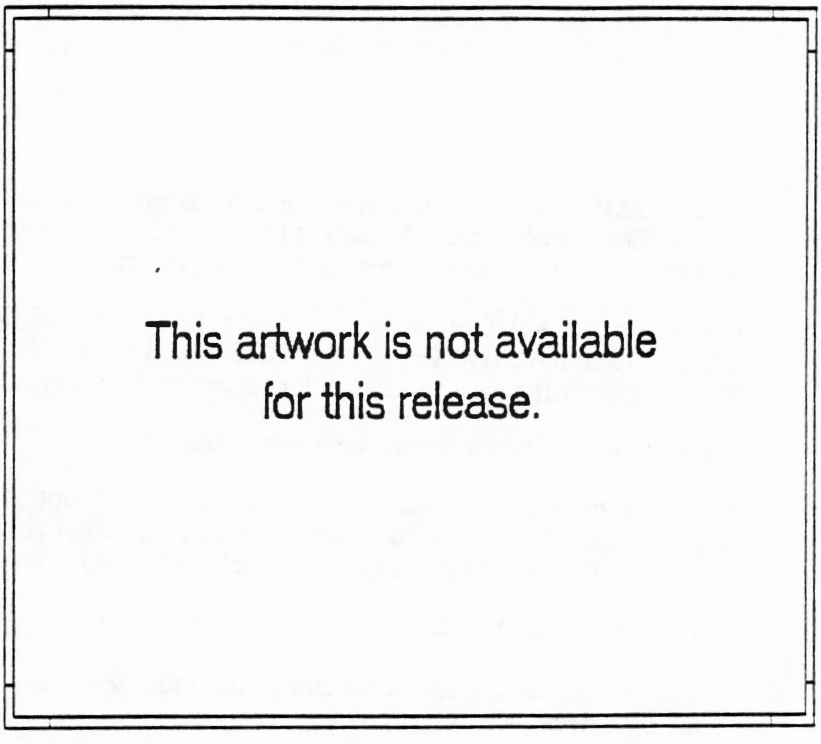

edt_1

To get information about Edit, press ENTER when this first screen appears, or click the area between the angle brackets that reads "Press Enter to see the Edit Survival Guide." This is an introduction to Edit and the Edit help system.

To start working with Edit, press ESC or click the area between the angle brackets that reads "Press Esc to clear this dialog box."

You see an Edit screen with a blank Edit window. You create a text file by typing text in the window. If you specify a filename when you start Edit, this screen appears immediately.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

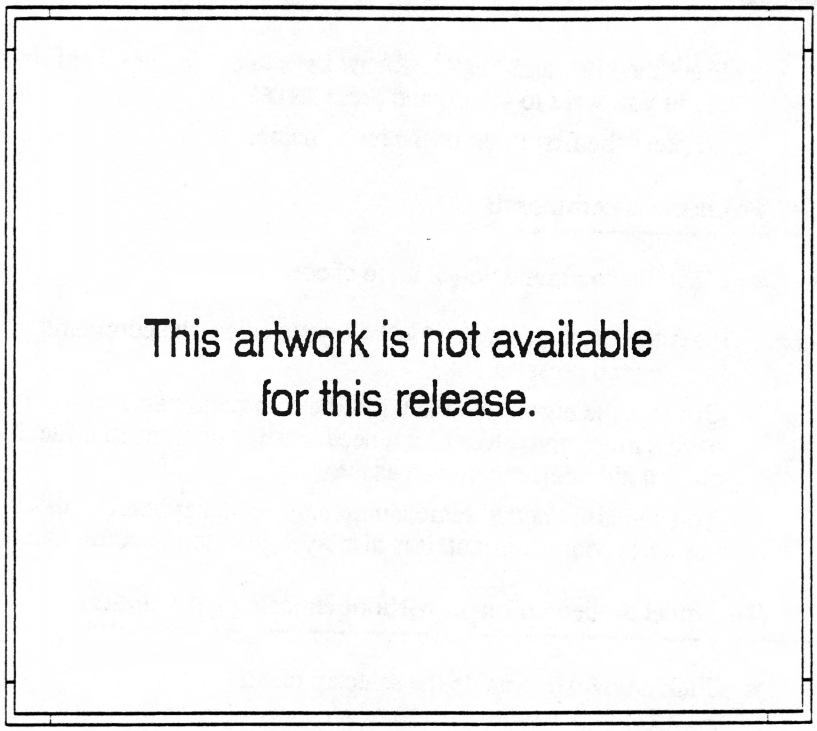

edt_2

Working with Menus

To perform tasks in Edit, you choose from lists of commands called *menus*. The names of the Edit menus are displayed at the top of the Edit screen. Before you choose a command, select the menu that has the command you want.

▶ **To select a menu:**

Mouse

- Click the name of the menu you want to select.

Keyboard

1. Press ALT.
   The first menu name, File, is highlighted.

2. Press the LEFT and RIGHT ARROW keys to move the selection cursor to the menu you want to select, and press ENTER.

   Or press the first letter of the menu name.

▶ **To choose a command:**

Mouse

- Click the command you want to choose.

Keyboard

- Press the UP and DOWN ARROW keys to select the command you want to choose, and press ENTER.

  Or press the highlighted letter in the command name. If a command does not have a highlighted letter, you need to select text, open a file, or perform some other action before you can use it.

  You can also choose some commands using keyboard shortcuts. If a command has a keyboard shortcut, it is displayed next to the command in the menu.

▶ **To cancel a selected menu without choosing a command:**

- Click anywhere outside the selected menu

  Or press ESC.

Working with Dialog Boxes

Some commands require you to give Edit more information. When you choose these commands, a *dialog box* appears. You enter additional information or choose options in the dialog box.

For example, when you choose the Open command from the File menu, a dialog box appears:

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

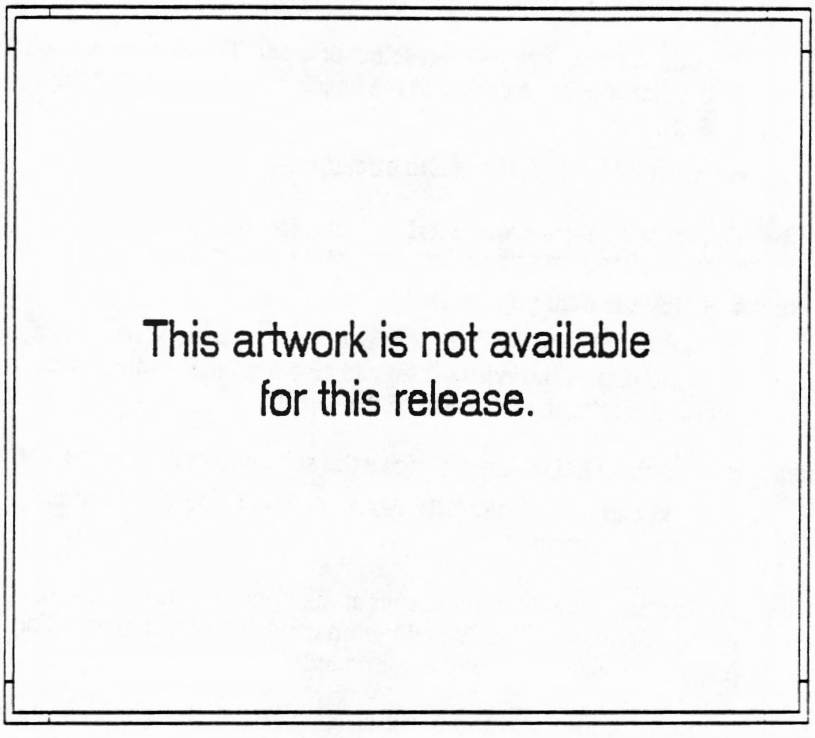

edt_3

Most dialog boxes have several areas in them, in which you can enter information or select options. You can move from one area of a dialog box to another by pressing the TAB key, or by clicking the area you want to use. You can also press the ALT key along with the highlighted letter of the area's name.

There are several types of areas in a dialog box:

- Text boxes in which you can enter text. If the box already contains text, you can clear it by typing any character or pressing the SPACEBAR.
- A series of options, with a bullet next to the currently selected option. You choose an option by clicking between the parentheses next to the option you want, or by moving the bullet with the ARROW keys.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

- A check box that you can select or clear. To select a check box, click the check box, or move the cursor to the check box with the TAB key and press the SPACEBAR.
- A list of files or drives and directories.

▶ **To select an item from a list in a dialog box:**

Mouse ■ Click the item you want.

If the item you want does not appear, click the scroll arrows until the item you want comes into view. You can also drag the small box that is in the scroll bar, or click the shaded areas of the scroll bar.

Keyboard ■ Use the ARROW keys to move the selection cursor to the item you want.

You can use HOME, END, PAGE UP, and PAGE DOWN to move the selection cursor more quickly.

Dialog boxes have three *buttons* at the bottom. The OK button performs the command you chose. The Cancel button cancels the command. The Help button displays information about the command.

You can choose a button in a dialog box by clicking it with the mouse, or by moving the selection cursor to it with the TAB key and pressing ENTER. You can also cancel a dialog box by pressing the ESC key, and get help by pressing F1. When the angle brackets around the OK button are highlighted, you can press ENTER to perform the command.

Getting Help

Edit's online help enables you to display information about:

- Edit menus and commands
- Getting started with Edit
- Using a keyboard with Edit

When you select an Edit command, the line at the bottom of the screen displays information about the command. For further help, select the menu or command you want to know more about, and press F1. Edit displays a help window that describes the menu or command and what it does. You can also display a help window by choosing the Help button at the bottom of each Edit dialog box. To clear help from the screen, press ESC.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

You can display information about getting started with Edit, and about the Edit keyboard, by using the Edit help system. The Edit help system contains information about editing keys, cursor movement, dialog boxes, selecting text, opening and saving files, and other basic information. You can enter the Edit help system in several ways:

- By pressing ENTER at the Edit startup screen
- By pressing F1 at the Edit window when no commands or menus are selected
- By choosing Getting Started or Keyboard from the Help menu

When one of the help windows appears, you can choose any of the related topics enclosed in triangular brackets. To display information, you move the cursor to one of the bracketed topics and press ENTER, or double-click the topic with the mouse.

When you choose a topic, the help system displays a window with information about that subject. Each screen contains additional topics that you can choose to get more information. When you are through using the help system, press ESC to return to the Edit window.

You can use these keys to move the cursor around from one topic to the next, or from one help window to the next:

To do this	Use this key
Move the cursor to next topic.	TAB
Move the cursor to previous topic.	SHIFT+TAB
Move the cursor to next topic starting with that character.	character
Move the cursor to previous topic starting with that character.	SHIFT+character
Look at help window for the previous topic (repeat up to 20 times).	ALT+F1
Look at the next help topic stored in the Help file.	CTRL+F1
Look at the previous help topic stored in the Help file.	SHIFT+CTRL+F1

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Exiting Edit

When you have finished working with Edit, choose Exit from the File menu. You return to the command prompt.

If you are working with a file that has been changed but not been saved, Edit asks you if you want to save the changes. For more information about saving files, see "XX" later in this chapter.

Creating a Text File

You create a text file by entering text on the Edit screen. When you reach the end of a line, you must press ENTER to tell Edit to move to the next line. Edit does not wrap words to the next line automatically. Lines in Edit can be up to 256 characters long.

The following table shows keys that make entering text easier. These keys are similar to the keys you use in word processors such as Microsoft Word and WordStar ®.

To do this	Use this key
Delete a character to the left of the cursor.	BACKSPACE or CTRL+H
Delete the character at the cursor.	DEL or CTRL+G
Delete the word at the cursor.	CTRL+T
Overwrite existing characters (press INS or CTRL+V again to stop overwriting).	INS or CTRL+V

Moving the Cursor

You can use the mouse or the keyboard to move the cursor around existing lines of text. You can also scroll the text to see parts of a file that are not displayed in the Edit window.

To move the cursor using the mouse, click the place on the screen where you want the cursor to be. If you are working with a file that is longer or wider than the Edit screen, you can use the scroll bars at the right and bottom of the screen to scroll text into view. To scroll text, point to one of the arrows on either end of the scroll bars and press the mouse button, drag the small box in the scroll bar, or click the shaded areas of the scroll bar.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

The following keys allow you to move the cursor around in existing lines of text :

To do this	Use this key
Move the cursor one character or one line.	ARROW KEYS
Move the cursor one word left.	CTRL+LEFT ARROW
Move the cursor one word right.	CTRL+RIGHT ARROW
Move the cursor to beginning the of the line.	HOME
Move the cursor to the end of the line.	END
Move the cursor to the beginning of the next line.	CTRL+ENTER
Move the cursor to the top of the screen.	CTRL+Q+E
Move the cursor to the bottom of the screen.	CTRL+Q+X

You can also use the keyboard to scroll the text that is on the screen:

To do this	Use this key
Scroll one line up.	CTRL+UP ARROW or CTRL+W
Scroll one line down.	CTRL+DOWN ARROW or CTRL+Z
Scroll one screen up.	PAGE UP
Scroll one screen down.	PAGE DN
Move to the beginning of the file.	CTRL+HOME or CTRL+Q+R
Move to the end of the file.	CTRL+END or CTRL+Q+C
Scroll one screen left.	CTRL+PAGE UP
Scroll one screen right.	CTRL+PAGE DN

You can also scroll by moving the cursor to the edge of the window and holding down an ARROW key.

Selecting Text

You perform various editing operations by *selecting* a block of text. For example, if you want to delete several lines at once, you can select the lines and press the DEL key. You can select any amount of text, from a single character to an entire file.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

▶ **To select text:**

Mouse

1. Point to the first character you want to select.
2. Drag the cursor to the last character you want to select.
3. Release the mouse button.

   To cancel a selection, click anywhere in the Edit window.

Keyboard

1. Use the ARROW keys or other cursor movement keys to move the cursor to the first character you want to select.
2. Hold down SHIFT, and use the ARROW keys to move the cursor to the last character you want to select.
3. Release the keys.

   To cancel a selection, press any cursor movement key.

After the text is selected, you can delete it with the DEL key or edit it using one of the commands in the Edit menu.

Editing Text

The Edit and Search menus list commands you can use to work with the text in a file. Using the commands in the Edit menu, you can move or copy a block of text from one part of a file to another. You do this by transferring text from the file to a storage area called the *clipboard*. You can locate any occurrences of a set of characters in a file or replace the characters you are searching for with a different set.

Moving Text

You can move a block of text using the Cut and Paste commands. This is useful if you want to rearrange the order of the text in a file.

▶ **To move a block of text:**

1. Select the block of text you want to move.
2. Choose Cut from the Edit menu, or press SHIFT+DEL.

   The block of text is removed from the file and placed on the clipboard.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

You can delete all the text in the current line by pressing CTRL+Y. You can delete the text from the cursor location to the end of the current line by pressing CTRL+Q+Y.

3. Move the cursor to the place in the file where you want the text to appear.
4. Choose Paste from the Edit menu, or press SHIFT+INS.

   The text on the clipboard is inserted into the file at the cursor location.

When you choose the Paste command, the text is not removed from the clipboard. The text remains on the clipboard until you move or copy another block of text to the clipboard. You can insert the text from the clipboard into the file as many times as you want by repeating the Paste command.

Copying Text

You use the Copy and Paste commands to copy a block of text.

▶ To copy a block of text:

1. Select the block of text you want to copy.
2. Choose Copy from the Edit menu, or press CTRL+INS.

   The block of text is copied to the clipboard. It is not removed from its original location.
3. Move the cursor to the place in the file where you want the copy of the text to appear.
4. Choose Paste from the Edit menu, or press SHIFT+INS.

   A copy of the text on the clipboard is inserted into the file at the cursor location.

When you choose the Paste command, the text is not removed from the clipboard. The text remains on the clipboard until you move or copy another block of text to the clipboard. You can insert the text from the clipboard into the file as many times as you want by repeating the Paste command.

TIP To replace a block of text with the text in the clipboard, highlight the block you want to replace, and choose Paste from the Edit menu. The text in the clipboard replaces the highlighted text.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Clearing Text

You can clear text from the Edit window, without copying it to the clipboard, by choosing the Clear command from the Edit menu. You can also use the DEL key to clear text.

▶ To clear text:

1. Select the text you want to clear.
2. Choose Clear from the Edit menu.

   Or press DEL.

   The text is cleared from the screen.

Choosing the Clear command has no effect on text that is on the clipboard.

Finding Text

To find text in a file, choose the Find command from the Search menu. The text can be a word, a phrase, or any other combination of characters and spaces. When Edit searches for text, it starts at the current cursor position and highlights the first occurrence of the text.

▶ To find text:

1. Choose Find from the Search menu.

   The Find dialog box appears.

   If you select text before you choose the Find command, the selected text appears in the Find What box. Otherwise the word at the current cursor location appears in this box. If you want to search for different text, type the text you are searching for in the Find What box.
2. Select The Match Upper/Lowercase option if you want to match capitalization exactly.

   Otherwise Edit finds, for example, both *Brown* and *brown*.
3. Select the Whole Word option if you want to find only separate occurrences of the search text.

   Otherwise Edit finds, for example, *main* in *remainder*.
4. Choose OK to start the search.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Edit begins searching at the cursor position. The first occurrence of the text is highlighted.

If no occurrences of the text are found, Edit displays a Match Not Found dialog box.

5. To search for the next occurrence of the search text, choose Repeat Last Find from the Search menu (or press F3).

   The Find command continues to search through the file each time you choose Repeat Last Find. When it reaches the end of the file, it returns to the beginning and continues searching.

6. Choose Cancel to close the Find dialog box.

Replacing Text

You can use the Change command to find text and replace it with new text. The Change command begins at the cursor location, and continues to the end of the file. When it reaches the end of the file, it returns to the beginning and continues searching and replacing.

▶ To replace text:

1. Position the cursor where you want to start replacing text.
2. Choose Change from the Search menu.

   The Change dialog box appears.

3. In the Find What box, type the text you want to replace, and in the Change To box, type the text you want to replace it with.
4. Select the Match Upper/Lowercase option if you want to match capitalization exactly.
5. Select the Whole Word option if you want to replace only separate occurrences of the search text.
6. Choose either the Find and Verify option or the Change All option to start searching and replacing.

   If you choose the Find and Verify option, each occurrence of the original string is highlighted, and a dialog box appears that asks if you want to make the change, skip this occurrence, or cancel the command. If you choose the Change All button, Edit replaces all occurrences of the search text.

7. Choose OK (or press ESC) when Edit displays the Change Complete dialog box.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Managing Files

Use the commands in the File menu to open an existing file, start working on a new file, and save or print the file you are working with.

Creating a New File

After you finish working on a file, you can create a new file by choosing the New command from the File menu.

▶ To create a new file:

1. Choose New from the File menu.

   If you have made changes to the file you are working on but have not saved it, Edit displays a dialog box asking you if you want to save the changes. Choose Yes to save the changes, or No to close the file without saving the changes.

   Edit closes the open file and displays an empty Edit window labeled "Untitled." You can begin typing text in this window.

2. When you want to save the new file, choose the Save As command from the File menu.

When you start Edit by entering the **edit** command without specifying a filename, Edit assumes that you want to create a new file, and displays an empty "Untitled" window.

Opening a File

You can open several types of files using the Open command in the File menu:

- Files you created previously with Edit
- Other unformatted text files (including files such as AUTOEXEC.BAT and CONFIG.SYS)
- Formatted text files created with a word processor. These files will include some formatting characters, and they will lose their formatting if you save them using the Save As command.

▶ To open a file:

1. Choose Open from the File menu.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

The Open dialog box appears.

2. Type the name of the file you want to open, or select the filename in the file list.

   If the file you want is not on the current drive or directory, you can type the pathname as part of the filename.

   To list the files in a different drive or directory, move to the Drives/Dirs list, select the drive or directory you want to list, and press ENTER. Depending on your directory structure, you might need to move up or down through several levels of subdirectories to get to the directory you want. The currently listed drive and directory are shown on the left side of the dialog box, below the words File Name.

3. When the file you want to open is displayed in the File Name box, choose OK.

   If you have made changes to the file you are working on when you choose the Open command, Edit displays a dialog box asking you if you want to save the changes. If you want to save the changes, choose Yes. If not, choose No. If you decide not to open the new file, choose Cancel.

Saving a File

After you have created a new file, or made changes to an existing file, you can save it on a disk by choosing the Save As command from the File menu. It is a good idea to save the file you are working on periodically, in case you experience a power loss or some other equipment failure.

▶ **To save a file:**

1. Choose Save As from the File menu.
2. When the Save As dialog box appears, enter a name for the file and choose OK.

   If you want to save the updated version of the file without changing its name, choose OK without entering a new name.

   If you want to save the file on a different drive or in a different directory, select the drive or directory you want in the Drives/Dirs list, or include a pathname when you enter the filename.

   If you try to save a file in a directory that already has a file of the same name, Edit displays a dialog box asking if you want to overwrite the existing file. Choose Yes to overwrite the file. Choose No to cancel the Save As command.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

If you save a file that has not been given a name, Edit saves the file with the name UNTITLED. If there is already an existing UNTITLED file, the new file overwrites the old one.

TIP You can use the Save As command to save a modified version of a file without losing the original version. For example, if you have a file named MEMO, you can keep this file and save the modified version as MEMO_A.

Printing a File

You can use the Print command in the File menu to print part or all of the open file. This command works only if you have a printer attached to the LPT1 (parallel) printer port.

▶ To print a file:

1. Be sure the file you want to print is open. If you want to print a portion of a file, select the text you want to print.
2. Choose Print from the File menu.

   The Print dialog box appears.
3. If you want to print only the text you selected before you chose the command, select the Selected Text option. Otherwise, select the Entire Document option.
4. Choose OK.

Customizing Edit

You can use the commands in the Options menu to set the screen display and help options for Edit.

Controlling the Screen Display

Use the Display command in the Options menu to change the colors or shades in the Edit window, display or hide scroll bars, and set the number of tab stops.

▶ To change the screen display:

1. Choose Display from the Options menu.

   The Display dialog box appears.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

2. Select a foreground color and a background color. The screen colors that are listed depend on the type of display you have. The words "Set colors for the text editor window" display a sample of the currently selected colors or shades.
3. Select the Scroll Bars option if you want scroll bars to appear in the Edit window. If you want to see more of the Edit window, clear the check box to hide the scroll bars. If you do hide them, you can still scroll text using the keyboard.
4. Set the number of spaces between tab stops. The default setting is 8 spaces.
5. Choose OK.

You can also control the screen display by specifying one or more switches when you enter the **edit** command at the command prompt. For more information about these switches, see the *MS-DOS 5.0 User's Reference.*

Specifying the Help Path

If you started Edit from a directory other than the directory that contains the EDIT.HLP file, Edit will not be able to display help information unless you specify the path to this file using the Help Path command in the Options menu.

▶ **To specify the Help path:**

1. Choose Help Path from the Options menu.
2. Enter the path to the directory that contains EDIT.HLP.

If you use the MS-DOS **path** command to set a path to the directory that contains EDIT.HLP, you do not need to use the Help Path command.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Part 3
Customizing MS-DOS

Chapter 11

Working with Batch Files

As you work with MS-DOS, you'll find yourself entering identical sequences of commands repeatedly. For example, you might enter the same three commands to change the current drive, change the current directory, and start a program. With MS-DOS you can store the three commands in a special file called a batch file. Instead of entering the commands individually, you can run the whole sequence by entering the name of the batch file. MS-DOS performs these "batches" of commands as if you had entered them from the keyboard.

Understanding Batch Files

Batch files are unformatted text files that contain one or more MS-DOS commands. For example, a batch file might contain the commands you use to change directories and start a word processor. Or it might contain the following commands that back up your files to a floppy disk:

```
cd \word\docfiles
copy *.doc a:
cd \excel\xfiles
copy *.xls a:
```

To make these four commands into a batch file, you store them in an unformatted text file and assign the file a .BAT extension. Each time you want to back up your files, you enter the name of the batch file at the command prompt.

Any task you can perform with a batch file, you can also perform at the MS-DOS command prompt or in the Shell. However, there are several good reasons to use batch files:

- Batch files speed up your work. By using a batch file, you only have to remember one command instead of several. You do not have to take the time to retype multiple commands or to look up commands you can't remember.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

- Batch files customize MS-DOS. Using batch files, you can create personalized commands that perform exactly the task you need. Batch files also let you design commands, prompts, and messages that add a personal touch to your system.

Each MS-DOS command has rules that you must follow whether you enter it at the MS-DOS command prompt or include it in a batch file. In addition, there are rules that govern how the batch file is created and used.

Batch File Commands

Any MS-DOS command that you can enter at the MS-DOS command prompt you can also put in a batch file. In addition, there are eight MS-DOS commands that are specially designed for batch files. These commands let you customize your batch files so that they act like programs, displaying messages on the screen and performing different tasks, depending on what the user of the batch file requests.

The following lists these special batch commands and describes what they do:

echo Displays messages on the screen.

pause Stops running the batch file until the user presses a key.

rem Annotates your batch files so that you can read them more easily.

if Runs different commands under different conditions.

goto Jumps to the commands in different parts of your batch file.

shift Increases the number of parameters you can use with a batch file.

call Runs a second batch file and then returns to the first one.

for Performs a command for a group of files.

The **echo**, **pause**, **rem**, **call**, **if**, and **goto** commands are explained later in this chapter. For information about the **shift** and **for** commands, see the *MS-DOS 5.0 User's Reference*.

Because batch commands are internal commands, you don't need to specify the directory that contains them.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Tools for Creating Batch Files

You can create a batch file using Edit, described in Chapter 10, "Working with the MS-DOS Editor," or the **copy** command. If you want to use a word processor other than Edit to create batch files, be sure it can save files as unformatted (ASCII) text. Most popular word processors have an option for saving files this way.

The **copy** command is a convenient way to create brief batch files. You can find more information about using the **copy** command to create batch files later in this chapter.

Naming Batch Files

You can give a batch file any valid name, but you must assign it a .BAT extension so that MS-DOS can identify it as a batch file.

It is generally not a good idea to give a batch file the same name as an existing MS-DOS command. Suppose, for example, that you create a batch file for a customized format command. If you name this batch file FORMAT.BAT, you have to be careful about how you start the batch file. If your FORMAT.BAT file is in the same directory as the MS-DOS FORMAT.EXE file, the batch file will never be used because MS-DOS gives precedence to files with the .EXE extension. In fact, if the MS-DOS FORMAT.EXE file is anywhere ahead of your batch file in the directory search path, your file will never be used. The only way you could be sure that FORMAT.BAT runs is to make its directory current or type its full pathname. You can avoid these problems by using names that are not already assigned to MS-DOS commands (for example, you could name the file MYFMT.BAT).

Running Batch Files

To run a batch file, you type its filename without the extension. For example, to run a batch file called FILES.BAT, enter the following command:

```
files
```

If the batch file has parameters, separate them from the name with a space. For example, if the FILES.BAT batch file expects the pathname of a directory as a parameter, you would enter a command like this:

```
files c:\excel\data
```

Unless you tell it otherwise, MS-DOS displays the commands of the batch file as they are executed. At the end of the batch file, MS-DOS might display two com-

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

mand prompts because it treats the end-of-file character in the batch file as an extra carriage return.

Stopping Batch Files

If you want to stop a batch file before all its commands have run, press CTRL+C or CTRL+BREAK. MS-DOS asks you to confirm that you want to terminate the batch file. Press Y to stop running the file or N to continue.

You can stop a batch file temporarily by pressing CTRL+S or PAUSE. This key combination freezes the display and pauses the batch file until you press any key.

If you remove the floppy disk that contains a batch file being run, MS-DOS prompts you to reinsert the disk so that it can continue running the file.

Debugging Batch Files

It is generally best to create large batch files in steps. This ensures that one part of the batch file works before you create the next part.

When you run a batch file, if one of the commands isn't correct, MS-DOS cancels it and proceeds to the next command. If the batch file is set up to display commands as MS-DOS runs them, you'll see an error message when a command is incorrect. If you do not see commands and error messages displayed, the batch file has an **echo off** command in it. To see commands and error messages displayed, make sure your batch file has no **echo off** commands.

If necessary, you can press CTRL+S to freeze the display while the batch file is running. When you freeze the display, the batch file also stops.

Undoing What You Have Done

The changes that occur because of the commands you execute in a batch file remain in effect until you specifically reverse them. Therefore, it is sometimes worthwhile to make your batch file undo the effects of its commands before the batch file ends. For example, if your batch file changes the current directory to perform a series of tasks, it is best to reset the current directory to what it was when the batch file began. If your batch file creates any temporary files, you may want the batch file to delete them before it ends so that they don't take up space on your disk.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

The AUTOEXEC Batch File

There is a special batch file, called AUTOEXEC.BAT, that contains commands you want MS-DOS to run each time you start your system. For example, if you want MS-DOS to set the search path, configure your printer, and change the MS-DOS command prompt each time you start your system, you can put a **path** command, a **mode** command, and a **prompt** command in your AUTOEXEC.BAT file.

The AUTOEXEC.BAT file is described in Chapter 12, "Customizing Your System."

Creating Small Batch Files

Creating a small batch file can be as easy as typing an MS-DOS command. Using the **copy** command, you can create a batch file directly from the keyboard. Suppose, for example, that you want to create a batch file that formats a 360K disk in your high-density disk drive. To create the file and name it MYFMT.BAT use the following **copy** command:

```
copy con c:\myfmt.bat
```

MS-DOS moves the cursor to the next line and displays it without the command prompt. At this point the file is empty.

To add the **format** command to the file, type the following line of text:

```
format a: /f:360
```

With the command in the batch file, you are ready to close the file and return to the MS-DOS command prompt by pressing CTRL+Z followed by ENTER.

Once you have created the batch file, you need only enter the name of the batch file to format a 360K floppy disk in your high-density disk drive as in the following example:

```
myfmt
```

MS-DOS displays the format command in the batch file, and then runs it (assuming the directory that contains this batch file is either current or in the directory search path). The result is the same as if you had entered the **format** command yourself.

The next batch file is also short enough to create using the **copy** command. The file backs up .DOC and .XLS files from two directories onto a floppy disk. As when creating the MYFMT.BAT file, you begin by entering the copy command and naming the file, as follows:

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

```
copy con c:\bakit.bat
copy c:\word\may\*.doc a:
copy c:\excel\may\*.xls a:
dir a:
```

If there are more than a few lines to your batch file, you'll want to use an editor such as Edit to create the file.

Displaying Messages with the Echo Command

In Brief

To display a line of text on the screen, use the **echo** command in your batch file as in the following command:

```
echo Batchworks Backup Builder
```

To stop MS-DOS from displaying commands as it runs them, use the following command:

```
echo off
```

A useful tool for customizing MS-DOS is the ability to display messages. When you want to tell the user what the batch file will do, or ask for more information, you can display a message.

To display messages on the computer screen, use the **echo** command. For example, the following command tells MS-DOS to display the message "Put a disk in drive A":

```
echo Put a disk in drive A
```

MS-DOS displays the message at the beginning of the next line of the display. If you want the message shifted to the right, you must add the extra space as part of the message. For example, to center the message on the screen, add a number of spaces to the command:

```
echo          Put a disk in drive A
```

If **echo** is off, you can skip a line on the display by entering **echo** without a message. If **echo** is on, enter **echo** followed immediately by a period (.) as in this command:

```
echo.
```

Because MS-DOS displays commands in a batch file as it runs them, the "Put a disk in drive A" message of the preceding example is displayed twice: first as part of the batch file command and secondly as a result of the command itself. To dis-

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

play a message only once, use the following command before displaying messages:

```
echo off
```

For example, you can add an **echo off** command to the beginning of the BAKIT.BAT file described in the previous section:

```
echo off
copy c:\word\may\*.doc a:
copy c:\excel\may\*.xls a:
cls
echo Here are the files on the backup disk:
echo.
dir a:  /p
```

All commands following the first are not displayed, including the two **echo** commands that introduce the directory listing. To control the display of the message and directory listing, the file clears the screen and adds the **/p** switch to limit the amount of directory information displayed at a time.

TIP To keep a single command in your batch file from being displayed put an ampersand (@) in front of it. For example, to supress display of the **echo off** command, enter **@echo off**.

To begin displaying commands again use this command:

```
echo on
```

Pausing a Batch File

In Brief

To stop a batch file from running momentarily, use the **pause** command, as in the following example:

```
pause
```

When MS-DOS finds a **pause** command in a batch file, it displays the following message:

```
Press any key to continue . . .
```

MS-DOS stops executing the file until the user presses a key.

For example, adding a **pause** command to the BAKIT.BAT batch file will enable you to momentarily stop running the batch file while you put a disk in drive A:

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

```
echo off
echo Put a backup disk in drive A then
pause
copy c:\word\may\*.doc a:
copy c:\excel\may\*.xls a:
cls
echo Here are the files on the backup disk:
echo.
dir a:  /p
```

A new message reminds you to put a backup disk in drive A before the batch file pauses.

As a result, MS-DOS displays the following:

```
Put a backup disk in drive A then
Press any key to continue . . .
```

The **pause** command is particularly helpful if you want to give the user of the batch file a chance to consider the results of a potentially dangerous operation.

Including Remarks in a Batch File

In Brief

To put a remark in a batch file, use the **rem** command, as in the following example:

```
rem This part of the batch file copies files to the backup disk.
```

If your batch files are longer than a few lines, it is helpful to include remarks that explain what the batch file is doing. Remarks are generally useful for two reasons: to comment on the commands in a batch file, and to make the file easier to read by separating it into sections.

After you type REM and a space, MS-DOS ignores any other text on the line. Therefore, you can type any characters you want on a remark line, or you can type REM and then leave the rest of the line blank to add space to the file.

For example, the following remarks divide and explain sections of BAKIT.BAT:

```
rem *****Backup the MAY dirs*****
rem
echo off
echo Put a backup disk in drive A then
pause
copy c:\word\may\*.doc a:
copy c:\excel\may\*.xls a:
rem
rem ********************************************************
```

```
rem Clear the screen and display the files that were backed up:
rem
cls
echo Here are the files on the backup disk:
echo.
dir a:  /p
```

Remarks don't affect the way a batch file runs; they simply explain the commands to anyone who reads through the file.

Starting Batch Files Inside Batch Files

In Brief

To start a batch file from inside another batch file, either include the name the file you want to start or use the **call** command. The first method permanently exits the file that includes the name and starts the second batch file. The second method exits the file, runs the second batch file, and returns to the original file when the second ends. For example, the following command starts the SUBTASK.BAT batch file from inside another batch file and returns to the original file:

```
call subtask
```

If you don't need to return to the original batch file, you can start SUBTASK.BAT without the **call** command.

If you want to execute two batch files one after another, enter the name of the second batch file as the last command in the first batch file. For example, the following batch file runs four commands. Rather than returning you to the MS-DOS command prompt when it ends, the program starts the NEXTONE.BAT batch file:

```
a:
cd \tmp
copy c:\*.sys
cd \perm
nextone
```

After it runs the four commands, MS-DOS starts the NEXTONE.BAT batch file. When NEXTONE.BAT ends, MS-DOS displays the command prompt.

If you want to return to the original batch file after running a second batch file, invoke the second batch file with a **call** command. When the second batch file ends, rather than displaying a system prompt, MS-DOS returns to the original batch file and runs the next command. For example, the following batch file runs two commands, invokes the NEXTONE.BAT batch file, and then runs two more commands.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

```
a:
cd \tmp
call nextone
copy c:\*.sys
cd \perm
```

After the first two commands, MS-DOS starts the NEXTONE.BAT file. When NEXTONE.BAT ends, MS-DOS returns to the batch file and runs the fourth and fifth commands.

Using Replaceable Parameters

In Brief

Replaceable parameters (**%0** to **%9**) are placeholders for parameters entered at the command prompt. For example, the following command in the BAKIT.BAT file includes two replaceable parameters:

```
copy %1 %2
```

At the command prompt the user types the two corresponding parameters, as in the following command:

```
bak c:\comm\*.* a:
```

MS-DOS replaces **%1** with C:\COMM*.* and **%2** with A:.

Suppose you want to create a batch file that moves a file from one directory to another. In its simplest form, the batch file consists of a **copy** command and a **del** command. The **copy** command requires two parameters to specify the source and destination files; the **del** command requires one to specify the file to be deleted. For example, the following moves the CASTILE.EXE file from the root directory of drive A to the GAMES directory of drive C:

```
copy a:castile.exe c:\games
del a:castile.exe
```

As a batch file, the example is very limited because you can use it to move only a specific file, CASTILE.EXE. To create a batch file useable for any file, you need a way to replace MS-DOS parameters in the batch file with information the user enters when invoking the file. Replaceable parameters provide it.

MS-DOS includes 10 replaceable parameters numbered **%0** through **%9**. The **%0** replaceable parameter substitutes for the first piece of information the user types, **%1** substitutes for the second, **%2** for the third, and so on. If you want to specify more than 10, use the **shift** command described in the *MS-DOS 5.0 User's Reference.*

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

If you use the percent sign as part of a filename *within a batch file*, you must type it twice. The first % tells MS-DOS that the second % is part of a name, rather than a placeholder.

You don't have to start with **%0**. For instance, in the preceding example, you could use **%1** to substitute for A:CASTILE.EXE and **%2** to substitute for C:\GAMES.

MS-DOS uses the parameters in the order they are entered at the command prompt. In this case, if the user enters the command MOVE A:CASTILE.EXE C:\GAMES, MS-DOS substitutes A:CASTILE.EXE for parameter **%1** and C:\GAMES for parameter **%2**.

If the batch file requires a parameter that the user does not provide, MS-DOS displays an "Invalid parameter" message.

In addition to replaceable parameters, you can use environment variables in a batch file. For more information about environment variables, see the **set** command in the *MS-DOS 5.0 User's Reference*.

Controlling When Commands Run

To increase the flexibility of your batch files, you can use the **if** command to run different commands under different conditions, and the **goto** command to jump to different parts of the batch file. In conjunction with replaceable parameters, conditional and jump commands allow your batch files to perform complex tasks that exceed what you can do by entering commands at the command prompt.

Using Goto

In Brief

To jump to another part of the batch file, use the **goto** command and a label, as in the following command:

```
goto runword
```

The label *runword* (preceded by a colon) must appear on its own line somewhere else in the batch file as in the following example:

```
:runword
```

The **goto** command tells MS-DOS to jump to another line of the batch file. The line of the batch file that MS-DOS should jump to is marked with a label preceded

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

by a colon (:). The same label appears in the **goto** command as is shown in the following illustration:

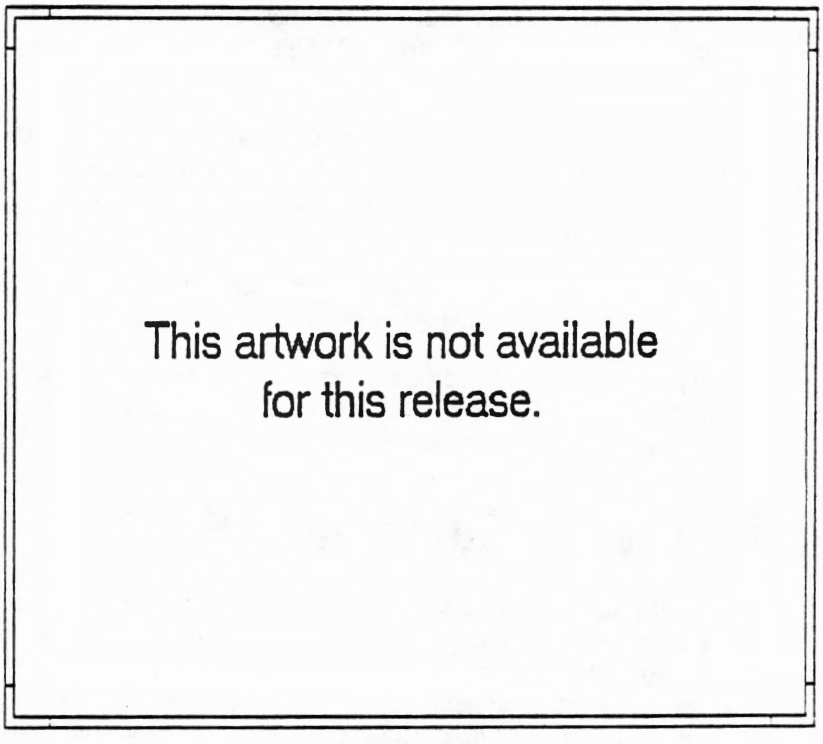

bat_1

Using If Commands

In Brief

To execute a batch file command only when one or more conditions are met, use the **if** command. For example, the following command will start Microsoft Word when the user types W as a parameter:

```
if "%1" == "W" c:\word\word
```

The parameter and the text it is compared to must be enclosed in quotation marks and they must match exactly. In this case the user must enter an uppercase W.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

The **if** command lets you specify a condition that must be true in order for MS-DOS to run a command. For example, suppose that you want to create a batch file named RUNIT.BAT that starts your chess program, CMATE.EXE, when the user enters the following command:

```
runit A
```

To perform this task, include the following **if** command:

```
if "%1" == "A" cmate
```

When MS-DOS runs the preceding command, it checks to see if **%1** is an A (the double equal sign (==) means the parameter must equal the value). If **%1** is an A, MS-DOS runs the command that follows (start CMATE.EXE). When the user exits from CMATE.EXE, MS-DOS runs the command on the next line of the batch file.

If **%1** is not an A, MS-DOS skips the command that runs CMATE.EXE and moves to the next line of the batch file. The parameter and the letter that it is compared to must be enclosed in quotation marks to tell MS-DOS that they are text.

You can also use the **if** command with negative signs, filenames, and error values. For more information, see the **if** command in the the *MS-DOS 5.0 User's Reference.*

Using If and Goto Together

In Brief

To jump to a different line of a batch file when one or more conditions are met, use an **if** command with a **goto** command, as in the following example:

```
if "%1" == "W" goto runword
```

If you use the **goto** command with an **if** command, you can make MS-DOS run different sections of a batch file under different conditions.

For example, the following command tells MS-DOS to jump to the line labeled *chess* if the user enters an A:

```
if "%1" == "A" goto chess
```

If the user enters anything other than an A as a parameter, including no parameter, MS-DOS moves to the next line of the batch file. With a series of **if** commands you can create a batch file that will allow you to run any number of programs.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

For example, suppose you want the batch file to change to the C:\GAMES\CHESS directory and run CMATE.EXE if the user enters A, or change to the C:\GAMES\CHECK directory and run CHECKERS.EXE if the user enters anything but an A.

You can use the preceding **if** command with the following other commands to run other games, depending on what the user enters:

```
if "%1" == "A" goto chess
rem
rem************************************************
rem If the user doesn't type A, run checkers.
cd \games\check
checkers
rem skip over chess by going to the line labeled :end
goto end
rem
rem ***************************************
rem If MS-DOS goes to this label, the user wants chess.
:chess
cd \games\chess
cmate
rem The following line marks the end of the batch file.
:end
```

Creating a Batch File Menu System

One way to customize MS-DOS is to create a batch-file menu system that lets you type simple commands to start the programs you normally use. Menus are particularly helpful if novice users will be using your system.

For example, suppose that you use Microsoft Word and a number of computer games. In addition, you use a batch file to back up Word document files to a floppy disk. Using a series of batch files, you can create a menu system that lets you or anyone else use these programs without having to know where they are or how MS-DOS starts them.

The customized menu you create might look this:

```
        Start Menu


Here's what you can do:

1. Back up the Word document files

2. Start Microsoft Word
```


niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

```
3. Play a game

4. Use MS-DOS


Type the number you want and press ENTER:
```

You can create this menu and customized command prompt with very little effort. With the following **echo** and **prompt** commands you can tell MS-DOS to display the menu and prompt:

```
echo off
cls
echo      Start Menu
echo.
echo.
echo Here's what you can do:
echo.
echo 1. Back up the Word document files
echo.
echo 2. Start Microsoft Word
echo.
echo 3. Play a game
echo.
echo 4. Use MS-DOS
echo.
echo.
prompt Type the number you want and press ENTER:
```

The **cls** command clears the screen before MS-DOS displays the menu. The **prompt** command changes the command prompt so that it asks for a menu option. Notice, however, that the MENU.BAT file doesn't do anything but clear the screen and display a number of messages. The real work is done by other batch files that perform the tasks on the menu. The menu itself simply tells the user what to enter to start the batch file that performs a task.

The batch files that perform each menu option are named so that the user enters a single number to start them:

- The batch file that the backs up Word document files is called 1.BAT
- The batch file that starts Microsoft Word is called 2.BAT.
- The batch file that allows you to play a game is called 3.BAT.
- The batch file that returns you to MS-DOS is called 4.BAT.

Because the name of the batch file that performs an option is identical to the number of the option on the list, when users enter a number at the menu prompt they are actually starting a new batch file.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Making a Menu Item with Pause

Menu option 1 on the Start Menu is "Back up the Word document files." The batch file that performs this option must be called 1.BAT so that the user can start it by entering 1 at the menu prompt.

This batch file copies .DOC files from their usual directory to a floppy disk. The batch file includes a **pause** command that waits for the user to put a backup disk in the disk drive. Because the user might want to return to the menu to perform some other function, the 1.BAT batch file starts the MENU batch file when it ends.

If the Word document files are in the C:\WORD\DOCFILES directory, and the backup drive is A, 1.BAT would contain the following commands:

```
echo off
cls
echo To back up the word files, put the backup disk in drive A
echo and press ENTER
pause
echo These files are being backed up:
copy c:\word\docfiles\*.doc a:
echo.
echo When you are ready to return to the Start Menu, press ENTER
pause
menu
```

By choosing 2 from the Start Menu, the user tells MS-DOS to run this batch file. The batch file clears the screen and prompts the user to insert the backup disk. After the files are copied, the batch file pauses to give the user a chance to read the display. As its last command, the batch file runs the MENU.BAT batch file to return the user to the Start Menu.

Making a Menu Item with Replaceable Parameters

Menu option 2 on the Start Menu is "Start Microsoft Word." The easiest way to perform this option is to have a batch file called 2.BAT that starts Microsoft Word. If the Word program file is C:\WORD\WORD.EXE, the following command would start the program:

```
c:\word\word
```

One way to make the option more useful is to have it display available Word document files and then give the user the choice of editing an existing file or opening a new file. The two tasks require two batch files. The first displays the existing files and prompts the user for a file to edit; the second starts Word with an existing file or a new file.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

The first batch file is like a menu. It displays a list of files to choose from and then asks the user to choose one. This batch file must be called 2.BAT so the user can start it by entering a 2 at the menu prompt.

The 2.BAT batch file would contain the following commands assuming that the Word files have a .DOC extension and are in the C:\WORD\DOCFILES directory, and that the Word program file is C:\WORD\WORD.EXE:

```
echo off
cls
cd c:\word\docfiles
echo          Start Microsoft Word
echo.
echo.
echo Here are the Word files that already exist:
echo.
dir *.doc /p
echo.
echo To edit a new file, type W and press ENTER.
echo.
echo To edit an existing file, type W and the filename
echo (separated by a space) then press ENTER.
echo.
prompt What'll it be?:
```

The batch file makes the Word document directory current and then shows the user which files are available. It sets the current directory to C:\WORD\DOC-FILES so the user doesn't have to enter any directory pathnames. The **dir** command uses the **/p** switch so that MS-DOS will pause if there is more than one screenful of files. The batch file displays messages that explain how to start Word with a new or existing file. The final command in the batch file changes the prompt.

The user runs this batch file by entering 2 at the prompt that the Start Menu displays. The batch file produces a screen that looks like this:

```
Start Microsoft Word


Here are the Word files that already exist:

CH1 DOC
CH2 DOC
CH3 DOC
CH4 DOC

To edit a new file, type W and press ENTER.

To edit an existing file, type W and the filename
(separated by a space) and then press ENTER.
```


niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

```
What'll it be?:
```

To start Word, you need a second batch file. To create such a batch file, you can take advantage of the fact that Word, like most word processing programs, allows you to specify a file to edit when you start it. For example, to start Word and edit C:\WORD\DOCFILES\HONCH.DOC you would enter this command:

```
c:\word\word c:\word\docfiles\acct.doc
```

C:\WORD\WORD starts the program; C:\WORD\DOCFILES\ACCT.DOC is a parameter that tells Word which file you want to edit. If you don't enter a filename, Word assumes that you want to edit a new file.

You can use a replaceable parameter to start Word and tell it which file to edit (if any). According to the instructions that 2.BAT displays, the user enters W to edit a new file or a W plus a filename to edit an existing file. You can execute these instructions by creating a batch file called W.BAT that includes the following command:

```
c:\word\word %1
```

When the user enters W, MS-DOS starts the W.BAT batch file. To ensure that the user doesn't have to type a pathname, W.BAT must be in the current directory (C:\WORD\DOCFILES) or in the directory search path.

If the user enters a filename after the W, MS-DOS assigns it to the **%1** parameter, and Word starts with that file. If the user does not enter a filename, MS-DOS ignores **%1**, and Word starts with a new file.

W.BAT needs two more commands to get the user back to the Start Menu. When the user exits from Microsoft Word, MS-DOS returns to the batch file and runs the next command. To return to the menu, the batch file should change the current directory back to the root directory of drive C and display the menu. The following shows the command that starts Word, and the two commands that return the user to the Start Menu. Together, these commands constitute W.BAT:

```
c:\word\word %1
cd \
menu
```

Making a Menu Option with If and Goto

Option 3 of the Start Menu is called "Play a game." To create its batch file, use the same sort of **if** and **goto** commands that were used in the examples in "xx" earlier in this chapter.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Like the batch files that start Microsoft Word, there are two batch files for this option: one that displays a games menu and one that starts the appropriate game. The first must be named 3.BAT so the user can start it from the Start Menu by entering 3. If there are three games you want to list (for example, chess, checkers, and backgammon), 3.BAT would contain the following:

```
echo off
cls
echo        Let's Play a Game!
echo.
echo.
echo Here are your choices:
echo.
echo A. Play chess.
echo B. Play checkers.
echo C. Play backgammon.
echo.
echo To start a game, type "game" and the letter of the
echo game. Then press ENTER (for example, game A).
echo.
prompt What'll it be?:
```

Like the batch file that displays the Start Menu, this batch file simply presents the alternatives. You could create a separate batch file for each option. However, by using **if** and **goto** commands, you can cover all the options in a single batch file.

The instructions in the menu tell users to enter *game* and the letter of the game they want to play. If the chess game is \GAMES\CHESS\CMATE.EXE, the checkers game is \GAMES\CHECK\CHECKERS.EXE, and the backgammon game is \GAMES\BACK\BACKGAMM.EXE, then a batch file called GAME.BAT containing the following commands will perform all options:

```
rem ***** This batch file runs a game *****
echo off
cls
rem See which game the user chose
if "%1" == "A" goto chess
if "%1" == "B" goto check
if "%1" == "C" goto back
rem
rem ************************************************
rem If MS-DOS comes here, the user didn't choose a game.
echo.
echo Enter game A, game B, or game C.
pause
rem If no game, skip over all of the game commands.
goto end
:chess
rem
rem ************************************************
rem if MS-DOS comes here, the user chose chess
```


niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

```
cd \games\chess
cmate
rem If the user chooses chess, skip checkers and backgammon
goto end
:check
rem
rem ************************************************
rem If the user chooses checkers, go here
cd \games\check
checkers
rem If the user chooses checkers skip backgammon
goto end
:back

rem
rem ************************************************
rem If the user choose backgammon, go here
cd \games\back
backgamm
rem
rem ************************************************
rem When the games are finished change the
rem directory back and display the Start Menu.
:end
cd \
menu
```

MS-DOS jumps to one of three locations in the batch file, depending on the parameter the user types. If the user omits a parameter or types an incorrect parameter, the batch file displays an error message and returns the user to the Start Menu. The batch file GAME.BAT must be in the root directory or in the directory search path so that the user need only enter **game** to start it.

The batch file changes to the directory that contains a game in case the game program and its data files must be in the current directory. However, before the batch file finishes, it resets the directory to the root. The last statement of the batch file starts the batch file that displays the Start Menu.

Exiting from the Menu System

To provide a way for users to get back to the familiar command prompt, the 4.BAT batch file contains the following commands:

```
prompt $p$g
cls
```

The Start Menu prompts the user to enter a number. If the user enters 4, MS-DOS runs the 4.BAT batch file. The batch file clears the screen and sets the command prompt to show the current drive and directory.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Chapter 12

Customizing Your System

You can customize how MS-DOS uses hardware, memory, and files to get different results or to meet special conditions. For instance, you can customize the way MS-DOS interacts with your keyboard and monitor and change the amount of memory MS-DOS reserves for itself and for storing files.

A piece of hardware that enables you to communicate with the computer is called a *device*. You use devices such as a keyboard or mouse to give the computer information (*input*), and devices such as a monitor or printer to receive information from the computer (*output*). Each device has its own characteristics that can be customized.

When MS-DOS starts it looks for a special batch file that defines the characteristics of devices on your system. The file, named AUTOEXEC.BAT, can also include any MS-DOS commands you want to run each time you switch on your system. For example, you can define the port to which your printer is connected, control the rate that MS-DOS repeats a keystroke when you hold a key down, define the path that MS-DOS uses to find files, and clear your screen of startup messages.

For every device, there is a program that MS-DOS uses to control it. Such a program is called a *device driver*. For instance, MS-DOS uses a device driver to control how information is read to and from your floppy disk drive. MS-DOS has built-in device drivers for your keyboard, monitor, hard and floppy disk drives, and ports. MS-DOS includes other device drivers that are installable. Unlike built-in drivers, which are part of MS-DOS, installable device drivers are stored on disk. When you want to use them, MS-DOS must install them by transferring the drivers from disk to memory.

You tell MS-DOS what devices to install, and which built-in and installable device drivers to use, with a file named CONFIG.SYS. This file contains special CONFIG.SYS commands that also determine how MS-DOS uses memory and controls files. (For more information on MS-DOS and memory, see Chapter 13, "Optimizing Your System.") When you start your system, MS-DOS runs commands in the

t-mark • Thu May 17 14:43:46 1990 • MICROSOFT CONFIDENTIAL

CONFIG.SYS file before running AUTOEXEC.BAT. First CONFIG.SYS determines the devices you want on your system; then AUTOEXEC.BAT defines their characteristics.

If you have more than two floppy disk drives on your system, use CONFIG.SYS to install the DRIVER.SYS driver. DRIVER.SYS controls how MS-DOS uses additional floppy disk drives. If you want to change characters that a key displays or the way your monitor displays characters, you'll need the installable driver named ANSI.SYS. This chapter concludes with a description of the ANSI.SYS commands.

Creating a Startup Procedure

A startup procedure is one or more commands that MS-DOS runs automatically each time you start your system. The commands can set the characteristics of your devices, customize information that MS-DOS displays, and start batch files and programs.

MS-DOS comes with a startup procedure that is defined in a batch file named AUTOEXEC.BAT. The file is located in the root directory of your system disk. Each time you switch on your system, MS-DOS looks for this AUTOEXEC.BAT file and automatically runs the commands stored in it. You can also run AUTOEXEC.BAT anytime without restarting your system by entering **autoexec** at the command prompt.

You can make your own startup procedure in the AUTOEXEC.BAT batch file using the techniques described in Chapter 11, "Working With Batch Files." Be sure to store your startup procedure in a file named AUTOEXEC.BAT so that MS-DOS runs your procedure automatically. To avoid loosing the original MS-DOS AUTOEXEC.BAT startup file, change its name before you create your own.

Startup Commands

Every command in an AUTOEXEC.BAT file can also appear in any other batch file. Each is fully described elsewhere in this *User's Guide* or in the *MS-DOS 5.0 User's Reference*. The following list briefly describes the most common AUTOEXEC.BAT commands and indicates where to find more information about them:

- The **mode** command sets the characteristics of your keyboard, display, parallel ports, and serial ports. For more information about the **mode** command, see xx later in this chapter.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

- The **date** and **time** commands prompt you to enter the correct date and time. These commands are important to include in your AUTOEXEC.BAT file only if your system does not have a clock that stays current when the power is off. For more information about the **date** and **time** command, see "xx".
- The **path** command indicates the directories where MS-DOS will search for a program file that you want to run. For more information about the **path** command, see xx
- The **echo off** command tells MS-DOS not to display the commands of the AUTOEXEC.BAT file as they are executed. For more information about the **echo** command, see xx.
- The **set** command creates an environment variable that can be used by programs and batch files. For more information about the **set** command, see the *MS-DOS 5.0 User's Reference.*

AUTOEXEC.BAT files often contain commands that run other batch files or programs. These commands allow you to start a program or batch file automatically without having to enter its name. For example, to start the Shell each time you switch on your system, you would include the following command at the end of your AUTOEXEC.BAT file:

```
dosshell
```

After MS-DOS finishes running all the batch files and programs in the AUTOEXEC.BAT file, it displays the command prompt (or the Shell, if the AUTOEXEC.BAT file is set up to start the Shell).

Instead of the command that runs the Shell, you might want to include the command that installs Doskey and any Doskey macros you commonly use. For more information, see xx.

Sample Startup Procedures

If you are satisfied with the way MS-DOS starts and sets up your devices, you need not create your own startup procedure in an AUTOEXEC.BAT file. On the other hand, some commands are best suited for an AUTOEXEC.BAT file.

For example, a system with two floppy-disk drives and a clock that does not run when the computer's power is off might use an AUTOEXEC.BAT file with the following commands:

```
date
time
path a:
```


niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

The **date** and **time** commands prompt you to set the date and time when you start MS-DOS. Commands such as **xcopy**, **backup**, and **restore** may not work correctly if your clock is not accurate. The command **path a:** tells MS-DOS to look for commands or programs on drive A in addition to the current directory.

For a system with one floppy-disk drive, one hard drive, a clock that does not need to be set, and the MS-DOS Shell installed, an AUTOEXEC.BAT file might contain the following commands:

```
path=c:\;c:\utility;c:\batch;c:\word;c:\excel
prompt=$p$g
doskey shell
```

The **path** command tells MS-DOS to look for program files in the current directory, and then in the following directories: the root directory of drive C, C:\UTILITY, C:\BATCH, C:\WORD, and C:\EXCEL. Semicolons separate the directories.

The **prompt pg** command displays the current drive and directory, followed by a greater-than sign (>), as the MS-DOS prompt. This is one of the more common forms of the MS-DOS command prompt.

The **doskey** command loads DOSKEY.COM into memory. Because the **doskey** command comes after the **path** command, DOSKEY.COM can be located in any of the directories listed in the **path** command. Likewise, the **shell** command tells MS-DOS to start the program called DOSSHELL.EXE.

For a system with one floppy disk drive, one hard drive, a clock that does not need to be set, a laser printer attached to port COM1, and a menu batch file that runs automatically, an AUTOEXEC.BAT file might contain these commands:

```
echo off
path=c:\;c:\utility;c:\batch;c:\word;c:\excel
prompt=$p$g
mode lpt1=com1
mode com1:9600,n,8,1,p
set tmp=c:\temp
menu
```

The **echo off** command tells MS-DOS not to display the AUTOEXEC.BAT commands as it runs them. The first **mode** command redirects printer output from LPT1, its default port, to the serial port COM1. The second **mode** command sets up the COM1 port to use with a printer such as the Apple ™ LaserWriter ™ printer.

The **set** command creates an environment variable called TMP. Many programs use this particular variable to find out where they should store their temporary files.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

The last command in the AUTOEXEC.BAT file starts another batch file called MENU.BAT. When MENU.BAT and any other programs or batch files that it starts end, MS-DOS displays a command prompt.

Configuring MS-DOS for Your System

Before looking for the AUTOEXEC.BAT file, MS-DOS runs a group of commands that load installable device drivers and reserve space in system memory for information processing. The file that contains these commands is named CONFIG.SYS. Like the AUTOEXEC.BAT file, a version of CONFIG.SYS comes with MS-DOS and is located in the root directory of your system disk.

You can add and change CONFIG.SYS commands in the file to configure your system as needed. To edit the CONFIG.SYS file, use Edit or a word processor that saves files as unformatted (ASCII) text. For more information on using Edit, see Chapter 10, "Working with the MS-DOS Editor".

Because the CONFIG.SYS file controls how MS-DOS starts, MS-DOS runs it only when you start your system. If you change the file, you must start your system again to have the changes take effect.

An Overview of the Configuration Commands

There are 13 commands you can use in a CONFIG.SYS file. Except for the **break** command, you can't enter these commands at the MS-DOS command prompt; they must be included in the CONFIG.SYS file. The following table briefly describes the purpose of each CONFIG.SYS command:

Command	Purpose
buffers	Sets the amount of RAM that MS-DOS reserves for information transfer to and from the disk.
files	Sets the number of files that MS-DOS will allow to be open at any one time.
device	Tells MS-DOS to include an installable device driver in the operating system.
break	Controls how often MS-DOS checks to see if you pressed CTRL+C or CTRL+BREAK.
rem	Allows you to include descriptive comments in your CONFIG.SYS file.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Command	Purpose
lastdrive	Sets the number of disk letters MS-DOS recognizes as valid.
install	Tells MS-DOS to run a terminate-and-stay-resident (TSR) command while reading CONFIG.SYS.
country	Tells MS-DOS which country's language conventions to use.
shell	Tells MS-DOS to work with a command processor other than COMMAND.COM or to change the way COMMAND.COM is set up.
drivparm	Sets the characteristics of a disk drive.
fcbs	Sets the number of file control blocks (FCBs) MS-DOS can open concurrently over a network.
stacks	Sets the amount of RAM that MS-DOS reserves for processing hardware interrupts.
dos	Sets the area of RAM where MS-DOS will be located.

The **install**, **drivparm**, **fcbs**, and **stacks** commands are described only in the *MS-DOS 5.0 User's Reference*. The **country** command is described in Chapter 14, "Customizing for International Use". For information on using the **dos** command, see Chapter 13, "Optimizing Your System".

Installing Device Drivers

In Brief

To install an installable device driver, include a **device** command in your CONFIG.SYS file as in the following example:

```
device=c:\keyboard.sys
```

To use an installable device driver, you include a **device** command in your CONFIG.SYS file. This loads, or *installs*, the driver in memory. For example, to tell MS-DOS to use the device driver MOUSE.SYS in the C:\MOUSE directory, you would include the following command in your CONFIG.SYS file:

```
device=c:\mouse\mouse.sys
```

When MS-DOS reads this command, it loads MOUSE.SYS into memory. The driver becomes part of the MS-DOS system software and remains in memory until you switch on your system without the **device** command in your CONFIG.SYS file. In many cases, when you install a program that works with an installable device driver, it automatically adds the proper command to your CONFIG.SYS file. The **device** command is described fully in the *MS-DOS 5.0 User's Reference*.

t-mark • Thu May 17 15:18:42 1990 • MICROSOFT CONFIDENTIAL

Increasing the File Transfer Area

In Brief

To increase the memory that MS-DOS reserves for file transfer, use the **buffers** commands as in the following example:

```
buffers=30
```

When MS-DOS starts, it reserves an area in your main memory for temporarily holding information from disks. It divides the memory into units called *buffers* that are the same size as the sectors on the disk (usually .5K long). Each buffer can hold a sector of information from a disk. The buffers hold parts of files that are waiting to be stored or used by a program, as well as information from the disk's directories and file table.

As your directory structure becomes more complex, MS-DOS works more efficiently with additional buffers. The performance of MS-DOS increases up to about 50 buffers. However, the more buffers there are, the less space there is for other programs and data in memory.

To set the number of buffers that MS-DOS reserves for file transfers, use a **buffers** command in your CONFIG.SYS file. The amount of space actually reserved by the **buffers** command depends on the size of the disk sectors. For example, the following command tells MS-DOS to reserve 20 buffers for file transfer operations (10K of space for .5K sectors):

```
buffers=20
```

NOTE Disk caching programs such as SMARTDRIVE.SYS perform much of the work of buffers. If you use a disk caching program, you need fewer buffers. For more information about SMARTDRIVE.SYS, see Chapter 13, "Optimizing Your System".

Increasing the Number of Files You Can Have Open

In Brief

To increase the number of files that MS-DOS will allow you to have open simultaneously, use the **files** command as in the following example:

```
files=30
```

When MS-DOS starts, it reserves space in memory for a table that contains information about files that are currently open. The more files you expect to have open at a time, the more space MS-DOS needs to reserve for its table. You can have up

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

to 255 files open at a time. To specify the maximum number of files you expect to have open, use the **files** command.

For example, to tell MS-DOS to reserve enough space for 30 files, enter the following command:

```
files=30
```

Choose a number based on the number of files you expect to have. If you run database or spreadsheet programs, or if you run MS-DOS with Microsoft Windows® or with network software, you are likely to need a value of 30. On the other hand, the larger the number you specify, the more space MS-DOS will take in memory and the less space you will have for programs and data.

If you do not include a **files** command in your CONFIG.SYS file, MS-DOS assumes a value of 8. If you specify more than the limit of 255 files, you'll receive an error message when MS-DOS runs the CONFIG.SYS file.

Increasing CTRL+C Checking

In Brief

To increase the number of times MS-DOS checks for CTRL+C, use the **break** command as in the following example:

```
break=on
```

Unless you tell it otherwise, MS-DOS checks to see if you pressed CTRL+C or CTRL+BREAK only while it is reading from the keyboard or writing to the display. For example, if you press CTRL+C while MS-DOS is saving a file to disk, MS-DOS will not respond until the next time it displays something on the screen.

To tell MS-DOS to check more frequently for these key combinations, include the following **break** command in your CONFIG.SYS file:

```
break=on
```

After MS-DOS runs this command it will check for a CTRL+C or CTRL+BREAK almost anytime the program or command you are using calls on MS-DOS to perform a task.

Some programs ignore or redefine CTRL+C and CTRL+BREAK. Pressing these keys while you are using such a program may have another effect or no effect at all.

The **break** command can also be used in a batch file or at the command prompt.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Increasing the Number of Logical Drives

In Brief

To increase the number of logical drives that your system recognizes, use the **lastdrive** command as in the following example:

```
lastdrive=z
```

The default value is one more than the number of logical drives currently on your system.

When MS-DOS starts, it reserves space in memory for a table that contains information about each logical drive that you expect your system to use. Regardless of how many physical disk drives your system has, you can tell MS-DOS to leave space for up to 26 logical drives. You might need to increase the number of logical drives if your system is part of a network, or if you use the **subst** command to equate a directory with a disk drive. For more information about physical and logical drives, see xx, later in this chapter.

To change the number of logical drives, include a **lastdrive** command in your CONFIG.SYS file. For example, the following command reserves space for 10 logical drives (A through J):

```
lastdrive=j
```

The **lastdrive** command prepares MS-DOS to recognize extra logical drives. However, you must still assign these drives (to physical devices, network shares, existing directories and so on) before you can use them. You cannot reserve space for fewer drives than you actually have. Unless you tell it otherwise, MS-DOS assumes that you have one drive more than the logical drives currently on your system.

Sample Configuration Files

If you have a mouse and you use spreadsheet or database programs, you might have the following commands in your CONFIG.SYS file:

```
buffers=20
files=30
device=c:\dos\mouse.sys
break=on
```

The **buffers** command reserves 30 buffers (15K for .5K sectors) for transferring information to and from disks. The **files** command reserves enough room to have 20 files open at the same time.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

The **device** command tells MS-DOS to load the device driver MOUSE.SYS from the C:\DOS directory. The **break** command tells MS-DOS to check frequently for CTRL+C or CTRL+BREAK.

If you use a network, and your system is a 386<F2P8MJ251™ machine with expanded memory and 1K of extended memory, your CONFIG.SYS file might look like this:

```
buffers=20
files=30
rem   The following commands install the mouse, network ram cache,
and
rem   expanded memory drivers. The /a switch tells smartdrive to use
rem   expanded memory.
device=c:\mouse.sys
device=c:\net\network.sys
device=c:\bin\himem.sys
device=c:\bin\emm386.exe 1024
device=c:\bin\smartdrive.sys /a
break=on
rem The following command reserves space for 26 drives.
lastdrive=z
```

In addition to the commands contained in the previous CONFIG.SYS file, this file has commands to load additional device drivers and reserve space for additional drives.

A **rem** command indicates a comment in the CONFIG.SYS file. MS-DOS does not run **rem** commands.

The **device** commands tell MS-DOS to include the following four installable device drivers in the operating system: the program that lets MS-DOS communicate with the mouse, a program for managing the computer's network link, the program for creating memory caches, the program for managing extended memory, and the program for managing disk caches. For more information about the last two installable drivers, see xx.

The **lastdrive** command reserves space for 26 logical drives. In other words, on this system, letters from a to z are available as labels for drives.

Configuring Your Ports

To configure your parallel and serial ports, you use the **mode** command. Using the **mode** command, you can define how MS-DOS uses the printer ports when you execute commands such as **print**. You can also change settings on your serial

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

ports. You can enter the **mode** command alone or with a device name and one or more options.

Other programs that you run may change the configuration of certain devices. For example, most word processing programs have their own printer drivers that may supersede the one you configure with the **mode** command.

Configuring Your Printer

In Brief

To connect your printer to a serial port, use the **mode** command as in the following example:

```
mode lpt1 = com1
```

MS-DOS redirects the output it would normally send to LPT1 to COM1.

To change the characters per line and lines per inch that MS-DOS assumes for your printer, use the **mode** command with the name of your printer's port. For example, the following command tells MS-DOS that a printer supporting Epson® compatible escape sequences has 132 characters per line and 8 lines per inch (the defaults are 80 and 6 respectively):

```
mode lpt1:132,8
```

MS-DOS assumes your printer is attached to the LPT1 port unless you tell it otherwise. To tell MS-DOS that the printer is connected to a different port, use the **mode** command with the names of the two communication ports. For example, the following command tells MS-DOS to redirect its printer output from LPT1 to COM1:

```
mode lpt1 = com1
```

You can only redirect a parallel port to a serial port. You cannot redirect a parallel port to another parallel port and you cannot redirect a serial port to any other port.

For printers that support Epson compatible escape sequences, MS-DOS assume 80 characters across a line and 6 lines per inch of paper. If your printer prints 132 characters per line or 8 lines per inch, use the **mode** command with an LPT parameter to set MS-DOS to the new values.

For example, the following command configures MS-DOS for a printer attached to port LPT1 with 132 characters per line and 8 lines per inch:

```
mode lpt1:132,8
```


niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

You can add a retry option to tell MS-DOS how to behave when the printer does not accept information. For example, the following command tells MS-DOS to keep trying if the printer won't accept information:

```
mode lpt1:,,b
```

The two commas are placeholders for the first two options (characters per line and lines per inch), which will not change. MS-DOS will keep trying to send information to the printer until the printer responds or until you press CTRL+BREAK to stop printing.

If you use the **mode** command with no parameters, MS-DOS gives you information about your LPT, COM and CON ports. It tells you whether any of your LPT ports are re-routed. For LPT1, it also lists the retry option.

You can ask for information about a specific port by typing its name with the **mode** command. For example, the following command displays information about LPT1:

```
mode lpt1
```

Configuring a Serial Port

In Brief

To change the way MS-DOS communicates with a serial port, use the **mode** command with the name of the serial port as in the following example:

```
mode com1:9600,n,8,1,b
```

This command sets COM1 to communicate with printers such as an Apple LaserWriter.

To set up a serial port, you enter a **mode** with the name of the port. To specify exactly how MS-DOS should set up the port, you use one or more of the following switches:

- The **baud=** switch sets the rate at which MS-DOS communicates with the port. The default is 1200 baud.
- The **parity=** switch sets the error checking mode of the port. The default is even parity.
- The **data=** switch tells MS-DOS how many data bits the port expects. The default is 7.
- The **stop=** switch tells MS-DOS how many stop bits the port expects. The default is 1.

- The **retry=** switch tells MS-DOS how to behave if the device attached to the port is not ready. The default is to stop sending data if the device is not ready.

To change these settings for any of your serial communications ports, you can use the **mode** command with the name of the port.

For example, to set your COM2 port to work with a 2400 baud modem with even parity, seven data bits and one stop bit, you would use the following **mode** command:

```
mode com2:  baud=2400
```

You do not have to specify the parity, data and stop bits because they are the same as the default values.

You can type the name of the switch you want to change, or list the values you want with commas between each value. For example, the following two commands are equivalent:

```
mode com1:  baud=9600  parity=n  data=8  stop=1  retry=b
mode com1:9600,n,8,1,p
```

For the complete list of the values you can use for each switch, see the *MS-DOS 5.0 User's Reference*.

To display information about a COM port, enter a **mode** command with the name of the port. For example, the following command displays information about COM1:

```
mode com1
```

Adding Disk Drives

MS-DOS has a built-in device driver that controls two floppy disk drives. To add a third external floppy disk drive, you must install a separate device driver named DRIVER.SYS. You can use this device driver to control up to four external floppy disk drives. DRIVER.SYS cannot be used to control hard disk drives. For more information about built-in device drivers, see xx.

To use DRIVER.SYS, it's important to understand the difference between physical drives and logical drives. Physical drives are actual hardware components. The physical drives are numbered beginning at 0. Your first floppy disk drive is always physical drive 0, the second is always physical drive 1, and so forth. If you have a hard disk drive, it is physical drive 2 whether or not you have a second floppy disk drive. MS-DOS can support 127 different physical drives, but only 26 drive letters at a time.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Logical drives are labels that MS-DOS uses to keep track of where it sends data. Logical drive labels are letters a to z. Every physical drive has a corresponding logical drive. However, every logical drive does not have a corresponding physical drive. Your first floppy disk drive (physical drive 0) is always represented by MS-DOS as drive A. The second (physical drive 1) is always represented as B. You will have logical drives that do not correspond to physical drives if you use network drives, extended MS-DOS partitions, or RAM drives, or if you assign a drive letter to a directory.

In general, you need only logical drive letters. The only time you need to know the physical drive number of a device is when you define the drive with DRIVER.SYS or when you redefine the drive with a **drivparm** command in your CONFIG.SYS file. For information about the **drivparm** command, see the *MS-DOS 5.0 User's Reference.*

Installing the Driver

In Brief

To install DRIVER.SYS, include a **device** command in your CONFIG.SYS file. For example, the following command installs DRIVER.SYS for a new 5.25-inch 1.2M floppy disk drive:

```
device=driver.sys /d:2 /c /f:1
```

The switches are defined in the following paragraphs.

When you define a new disk drive, you tell MS-DOS which physical drive it is. MS-DOS gives it the next available logical drive letter. You cannot use DRIVER.SYS to change the setup for a previously defined logical drive. However, you can assign a second logical drive letter to a drive to change its characteristics.

To add a new floppy disk drive to your system, include a **device=driver.sys** command in your CONFIG.SYS file. To give the drive a physical drive number and specify what kind of drive it is, include one or more of the following switches:

- The **/d:** switch assigns a physical drive number to the new drive. The numbers range from 0 through 127. Drive numbers 0 and 1 are reserved for the two floppy disk drives that the built in device driver controls. Each DEVICE=DRIVER.SYS command must have a **/d:** switch.

  For example, **/d:3** switch sets the physical drive number to 3 (drive D).

- The /c switch tells DRIVER.SYS that the drive can sense when the drive door is open. If you specify this switch, MS-DOS assumes that the disk drive supports change-line error detection. This improves MS-DOS performance. See the documentation for your disk drive to see if it supports change-line.
- The /f: switch specifies the storage capacity of the disk drive you want to add. You can use any of the following values:

  0 = 160K/180K/320K/360K
  1 = 1.2 MB
  2 = 720K bytes
  7 = 1.44 MB or 2.88 MB
- The /h: switch specifies how many heads the drive has. You can specify a number from 1 through 99. The default value is 2.
- The /s: switch specifies the number of sectors per track on the disk drive. You can specify values from 1 through 99. The default value is 9.
- The /t: switch specifies the number of tracks per side on the disk drive. You can specify values from 1 through 999. The default is 80.

The following table shows the switch values that go together:

Drive type	/f	/h	/s	/t
360K or less	0	1 or 2	8 or 9	40
1.2 MB 5.25-inch	1	2	15	80
720K 3.25-inch	2	2	9	80
1.44 MB 3.25-inch	7	2	18	80
2.88 MB 3.25-inch	7	2	36	80

Suppose you want to add a 720K drive to your computer. The drive has two sides (that is, two heads), nine sectors per track, and 80 tracks per side. If DRIVER.SYS in the C:\DOS directory, you can make the new disk drive physical drive 2 with the following CONFIG.SYS command:

```
device=c:\dos\driver.sys /d:2/f:2
```

Because the disk drive has the default values for heads, sectors, and tracks, you don't have to include the switches that specify these values.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Assigning Two Drive Letters to a Single Drive

In Brief

To give two logical drive letters to the same physical device, include a **device** command in your CONFIG.SYS file. For example, the following command assigns the next available drive letter to the 360K disk drive that has drive letter A:

```
device=c:\dos\driver.sys /d:0 /f:1
```

If you include in your CONFIG.SYS file a **device=driver.sys** command that uses the number of an existing drive, MS-DOS assigns an additional drive letter to the disk drive. If you assign two drive letters to a drive, MS-DOS will prompt you to switch disks when you copy from one of the drive's logical device letters to the other.

For example, the following command tells MS-DOS to assign the next available drive letter to drive A (physical device 0):

```
device=c:\dos\driver.sys /d:0 /f:2
```

After this command, drive A has two different drive letters associated with it: A and the next available letter (D, for example). If a disk drive has two letters associated with it, MS-DOS allows you to copy files to and from that disk drive. For example, if drive A is also called drive D, you can use the following command to copy files to a different disk using only drive A:

```
copy a:*.* d:
```

MS-DOS prompts you to switch between the source disk and the destination disk.

Redefining Drive A or B

In Brief

To redefine a drive that your computer doesn't recognize, include a **device** command in your CONFIG.SYS file. For example, the following command redefines drive A as a 720K 3.25-inch floppy disk drive:

```
device=driver.sys /d:0 /f:2
```

MS-DOS gives the drive the next available drive letter.

Some computers are designed to function only with a certain kind of disk drive. If you try to use a different kind of drive, the computer does not recognize it. If your A or B floppy disk drive is incompatible with your system's settings, you can use DRIVER.SYS rather than the built-in device driver to control the drive.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

For example, suppose your system came with a 360K 5.25-inch disk drive as drive B. When you try to replace the drive with a 720K 3.5-inch drive, your computer still assumes that it is a 360K drive and experiences disk errors when it accesses the drive.

To remedy the problem, you can use the following command to install DRIVER.SYS to control the drive:

```
device=driver.sys /d:1/f:2/h:2/s:9/t:80
```

The **/d:1** switch tells DRIVER.SYS you want to assign a new logical drive letter to drive B. The other switches tell DRIVER.SYS what kind of disk drive it is.

As a result of this command, the 3.5-inch drive will have two letters: B and the next available letter (say, E). When you use drive B, the computer will still experience disk errors. However when you use drive E, the computer will recognize the drive and allow you to use it. By using an installable device driver to control the drive rather than the built-in device driver, you are able to change the characteristics that MS-DOS assumes for the drive.

Controlling Your Monitor and Keyboard

In addition to the device driver that normally controls your monitor and keyboard, MS-DOS provides another driver, called ANSI.SYS, that allows you to control the appearance of your screen and the functions of your keys. With the ANSI.SYS device driver, you can:

- Position the cursor anywhere on the screen.
- Change the color, background, and other qualities of the text on your screen.
- Erase text from the screen.
- Change the character that a key displays or assign a command to a key.

You modify your keyboard and monitor by running ANSI commands. For example, you can use ANSI commands to display a screen of multicolored text, or change a key so that you can type a character that your keyboard does not normally produce. The changes that you make using ANSI.SYS are overridden by many programs. This section describes the most common ANSI commands. For the full set of commands see the *MS-DOS 5.0 User's Reference*.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Understanding ANSI Commands

An ANSI *escape sequence* is a command that you send to your monitor or keyboard. The commands are called escape sequences because they always begin with the escape (ESC) character. They are called ANSI commands because they were developed by the American National Standards Institute (ANSI).

ANSI commands have a very different format from other commands you use with MS-DOS. ANSI commands begin with an ESC character and the square open bracket character ([). These two characters tell the ANSI.SYS driver that what follows is a command and not just a string of characters. Following these two characters are the parameters of the command. Lastly is a single letter command name (for example, the A command moves the cursor up a line). You have to type the command name in either uppercase or lowercase, whichever the command requires.

For example, the ANSI A command moves the cursor up. When you type the A command, you precede the name with a parameter that specifies how many lines to move up. For example the following command moves the cursor up 10 lines:

```
ESC[10A
```

ESC[tells the monitor that this is an ANSI command. The 10 is a parameter that specifies 10 lines, and the A is the command name. The A must be typed in uppercase. Notice that there are no spaces between any of the characters in the command. When ANSI.SYS finds a space in a command, it assumes that the space marks the end of the command.

If an ANSI command has more than one parameter, the parameters are separated by semi colons. For example, the following H command moves the cursor to line 3, character 12:

```
ESC[3;12H
```

The 3 specifies the line and the 12 specifies the character position to move the cursor to. H is the command name. The H must be typed in uppercase. Notice that the H follows the last parameter with no spaces and no semicolon.

Understanding ASCII Codes

Often ANSI commands require ASCII codes as parameters, so it is important that you understand what ASCII codes are. ASCII stands for the American Standard Code for Information Interchange and is a convention developed for representing characters. Originally, ASCII consisted of 127 different codes that represent the English alphabet and punctuation. Currently, most computers recognize 256 codes; the original 127 ASCII codes and an additional 127 codes called the IBM

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

extended character set. The extended character set includes a number of European characters, graphics characters and scientific characters.

Each key on your keyboard has an ASCII code associated with it. When you press a key, MS-DOS determines which key it is and then assigns the ASCII code to it. There are different codes assigned to the key alone and to the key combined with the SHIFT key. In addition, most keys have codes for key combinations using CTRL and ALT combinations. The ASCII codes for keys that display a character (A, S, D, F and so on) are single numbers. For example, the ASCII code for uppercase A is 65. The ASCII code for keys that don't display a character (F1, DEL, UP ARROW, and so on) is a zero and semicolon (0;) followed by a number. For example, the ASCII code for F1 is 0;59.

Depending on the ASCII code MS-DOS assigns, the monitor will display a different character. For example, when you press SHIFT+2, MS-DOS sends an ASCII 64 to the display. The display has a table that tells it what character to display when it receives an ASCII 64. Normally, an ASCII 64 is an At sign (@). For a list of the ASCII codes MS-DOS normally assigns to each key, see xx.

NOTE The ASCII code that MS-DOS assigns to a key is affected by the current code page, and the keyboard and display driver you are using. For more information, see xx.

Running ANSI Commands

To run an ANSI command, you send it to the monitor. To send it to the monitor, you display it in the same ways that you display text. There are a number of ways to display text. The following ways are the best suited to displaying (that is, running) ANSI commands:

- You can use the **prompt** command to enter and test your ANSI commands quickly.
- You can put ANSI commands in an unformatted text file and then enter a **type** command to display them.
- You can put ANSI commands inside batch files in an **echo** command. When the batch file runs, the ANSI commands are displayed by the **echo** commands.

Running ANSI Commands from a Prompt Command

The **prompt** command is the most convenient way to enter single ANSI commands. It allows you to enter ANSI commands directly from the keyboard. If you enter ANSI commands from the keyboard, you can easily edit them using Doskey.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Doskey allows you to display commands you have previously entered. For more information about Doskey, see xx.

If you press ESC on the keyboard, MS-DOS cancels what you've typed on the command line. Because ANSI commands begin with ESC, you need a way to enter ESC from the keyboard without canceling your command. The prompt command provides a way to do this. To specify ESC with the **prompt** command, type a $e combination. You can type ein uppercase or lowercase.

For example, you can enter the ESC[10A command, which moves the cursor, with the following **prompt** command:

```
prompt $e[10A
```

If you enter this example on your system, you'll notice that it runs the ANSI command but deletes your command prompt. This will happen anytime you use the **prompt** command to run ANSI commands. There are two ways to solve this problem. You can restore your command prompt with another **prompt** command after you are finished entering ANSI commands. Or you can add the characters that restore your system prompt (pg) to the ANSI command. For example, to run the ANSI A command and restore the command prompt, enter the following **prompt** command:

```
prompt $e[10A$p$g
```

This moves the cursor and then creates a command prompt that shows the current drive and directory. Notice that there are no spaces in the command. MS-DOS takes any spaces in a prompt command literally. If there is a space between the **$p** and **$g** in a **prompt** command, MS-DOS will display the space as part of the command prompt. The new cursor position becomes the new command prompt position. For more information, see xx,later in this chapter.

Running ANSI Commands from a Text or Batch File

To put an ANSI command in an unformatted text file or batch file, you can use any editing program that saves files as unformatted text and provides a way to enter the ESC character. In Microsoft Word, you can enter an ESC character by typing ALT+27.

If you have a number of ANSI commands that you want to run, it is most convenient to store them in an unformatted text file or batch file. To run the commands, you either display the text file using the **type** command or run the batch file. For example, the following command runs the ANSI commands stored in the text file SCREEN.ANS:

```
type screen.ans
```


niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Because the monitor interprets everything it receives as either a command or text to be displayed, there must be no spaces or carriage returns between the ANSI commands in your file. If you put carriage returns between your ANSI commands, the monitor will move the cursor to the beginning of the next line and display the command prompt. If you put spaces between you ANSI commands, the monitor will display spaces.

Consequently, a text file containing a series of ANSI commands looks like one continuous line of characters. For example, a file with 10 ANSI commands looks like this:

```
ANSICommand1ANSICommand2ANSICommand3ANSICommand4ANSICommand5ANSICommand
6ANSICommand7ANSICommand8ANSICommand9ANSICommand10
```

If you want to run ANSI commands from a batch file, begin each line with an **echo** command. An **echo** command in a batch file with five ANSI commands would look like this:

```
echo ANSICommand1ANSICommand2ANSICommand3ANSICommand4ANSICommand5
```

NOTE When putting ANSI commands in an **echo** command, remember that after an **echo** command MS-DOS automatically moves the cursor down 2 lines.

In this form a file filled with ANSI commands is very hard to read and edit. One way to avoid this problem is to put each ANSI command on its own line and then remove the carriage returns before you run the file. To make the examples in this section easier to read, ANSI commands are shown one per line.

Changing the Character and Key Displays

In Brief

To change the character a key displays use the ANSI **p** command. For example, the following command changes SHIFT+4 ($) to an ASCII 172, which is a one quarter sign (1/4):

```
Esc["$";172p
```

This form of the **p** command has two parameters: the character or ASCII code assigned to the key you want to change, and the character or ASCII code you want the key to have.

You can change the ASCII code MS-DOS assigns to a key using the ANSI **p** command. Specify ASCII codes by typing their number or by typing their character enclosed in quotation marks.

nikiasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

For example, to change SHIFT+2 to display a plus sign (+), use the following **p** command.

```
esc["@";"+"p
```

Notice that there are no spaces in the command and that the command name (**p**) follows the last parameter with no semicolon. Rather than typing the characters you can also use their ASCII codes as in this command:

```
esc[64;43p
```

When you use ASCII codes instead of characters, you do not need quotation marks. After you enter this command, whenever you press SHIFT+2 MS-DOS displays a plus sign (+).

To return the key to its original code, type its original code as the first and second parameter as in this command:

```
esc[64;64p
```

Because the key has been reassigned, you have to type its ASCII code.

There are 256 ASCII codes. Many of the codes are not normally assigned to a key. To assign a normally unassigned code to a key, use the character's ASCII code in a **p** command.

For example, if you want the SHIFT+2 key to display a check mark (✓), which is ASCII 251, rather than its normal At sign (@), use the following ANSI **p** command:

```
esc["@";251p
```

Because the At sign (@) normally exists on the keyboard, you have two ways to specify it: by typing an At (@) or by typing its ASCII code. The check mark does not normally exist on the keyboard, so you must specify it by typing its ASCII code.

Once a key has a different ASCII code, you can no longer type its character to specify it. To return the SHIFT+2 key to its normal assignment, enter its normal ASCII code as both the first and second parameter as in this command:

```
esc[64;64p
```

Assigning Commands to a Key

In Brief

To assign a command or sequence of commands to a key, use the ANSI **p** command. For example, the following command assigns the command C:\WINDOWS\WIN386 to the CTRL+W key (ASCII 23):

```
ESC[23;"c:\windows\win386";13p
```

This form of the **p** command can have any number of parameters. The first parameter always specifies the character or ASCII code of the key you want to change. The remaining parameters specify the operations you want the key to perform. The command in the above example assigns two separate operations to CTRL+W: Type the text C:\WINDOWS\WIN386, and issue an ASCII 13, which is the ENTER key.

In addition to assigning a single new character to a key, the **p** command also lets you assign any number of characters to a key. For example, you can assign the word *percent* to the percent key (SHIFT+5) with the following **p** command:

```
ESC["%";"percent"p
```

After this command, when you press SHIFT+5 MS-DOS displays the word *percent.*

You can use this capability of the **p** command to assign one or more MS-DOS commands to a key. To run a command, you type the command and press ENTER. Likewise, when you assign a command to a key, you have to tell MS-DOS to type the command and then issue an ENTER. To type the command, enclose it in quotation marks; to issue an ENTER, specify the ASCII code for the ENTER key (13). For example, use the following **p** command to assign the command **dir /s /p** to the SHIFT+7 ampersand (&) key:

```
ESC["&";"dir /s /p";13p
```

You include two parameters for each command you want to assign to the key: the text of the command and an ENTER character. Notice that you can type spaces inside a set of quotation marks.

To set the F1 key (ASCII code 0;59) so that it changes the current directory and starts the WORD.EXE program, enter the following **p** command:

```
ESC[0;59;"cd \edit";13;"word";13p
```

The command has four parameters: two commands enclosed in quotation marks and two ENTER codes (ASCII 13).

NOTE Many applications override key assignments.

Moving the Cursor

In Brief

To move the cursor, use the **A**, **B**, **C**, **D**, **H**, or **f** command.

The following **A** command moves the cursor up two lines:

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

```
esc[2A
```

The following **B** command moves the cursor down 3 lines:

```
esc[3B
```

The following **C** command moves the cursor right 10 characters:

```
esc[10C
```

The following **D** command moves the cursor left 5 characters:

```
esc[5D
```

The **H** and **f** commands are equivalent. Both of the following commands move the cursor to line 6, character 8:

```
esc[6;8H
esc[6;8f
```

When a command has finished, the cursor always returns to the position immediately to the right of the command prompt. If you run ANSI commands with a **prompt** command, you can change the cursor's position at the end of a command. If you run ANSI commands with text or batch files, you can change the position of the cursor in order to display text at a certain location. At the end of your ANSI command, however, the cursor will return to the command prompt.

You use the following ANSI cursor movement commands inside or outside a **prompt** command:

- The **A** command moves the cursor up from its current position.
- The **B** command moves the cursor down from its current position.
- The **C** command moves the cursor right from its current position.
- The **D** command moves the cursor left from its current position.
- The **H** command moves the cursor to the line and character you specify (you can type **f** rather than **H** for the same result).

The **A** through **D** commands are relative. They move the cursor a specified number of characters or lines from its current position. The **H** and **f** commands are absolute. Regardless of where the cursor is currently, they move it to the location specified. If the cursor is already at the edge of the display, and you send a command that tells the monitor to move the cursor off the screen, the command will be ignored and the command prompt will remain where it is.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

Positioning the Command Prompt

If you run an ANSI **H** command with the **prompt** command, the cursor position you specify becomes the permanent position of the command prompt. For example, the following command moves the cursor to the upper left corner of the display (the "home" position) and sets this to the new command prompt location:

```
prompt ESC[H$p$g
```

ESC[H moves the cursor to the home position, and pg displays the usual command prompt (current drive and directory and a greater-than sign). Until you enter another **prompt** command, MS-DOS will display the command prompt in the upper left most position of your screen.

If you position the cursor with the **H** command, you specify an absolute location where the command prompt will be displayed. If you position the command prompt with the other cursor movement commands, you specify where the command prompt will be displayed *in relation to its position at the end of a command.*

Recall that as MS-DOS sends command output to the monitor, it displays each line below the previous line. At the end of a command, MS-DOS moves the cursor down two lines and displays the command prompt. If your command prompt includes an **H** command, no matter where the cursor ended up at the end of the command, it will always move to the same position on the display. On the other hand, if your command prompt includes an **A**, **B**, **C**, or **D** command, MS-DOS moves the cursor up, down, or sideways from its current position when a command is finished.

For example, if you include the following **C** command in your command prompt, MS-DOS displays the command prompt beginning at the fourth character on a line:

```
prompt $e[3C$p$g
```

Before the prompt is displayed, MS-DOS always moves the cursor to the beginning of the line, two lines down. In this case, when MS-DOS displays the command prompt, the ESC[3C moves the cursor over three characters and the pg tells it to display the usual command prompt. The result is that the command prompt appears shifted over three characters.

Creating a Display

If you combine cursor movement commands with text, you can create custom displays. For example, the following ANSI commands in a batch file display an introductory screen to a program:

```
echo off
cls
```


niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

```
echo
ESC[7C"Welcome"
ESC[2B"to the"
ESC[2B
ESC[2C"Database Utility"
ESC[12;1H(For help press F1)
prompt $e[10;1HEnter a Command:cls
```

NOTE For clarity, each ANSI command is shown here on a new line. However, before you run this batch file there must be no spaces or carriage returns between the ANSI commands contained in the **echo** command. For more information, see xx, earlier in this chapter.

The **cls** command clears the screen and moves the cursor to the home position. The remaining lines position the cursor and display text. The screen produced by this batch file looks like this:

```
"Welcome"

  "to the"

    "Database Utility"


Enter a command:

(For help press F1)
```

The command prompt remains on line 10 of the display until you specifically reposition it.

Changing the Attributes of the Text

In Brief

To set the attributes of text, use the ANSI **m** command. For example, the following command makes text bold:

```
ESC[1m
```

This command makes text magenta and bold:

```
ESC[1;35m
```

The **m** command can have as many parameters as you want to specify. See the following paragraphs for a complete list of the attributes you can set.

niklasb • Wed May 16 18:19:40 1990 • MICROSOFT CONFIDENTIAL

You can use the ANSI **m** command to change the way text appears on your screen. After you set an attribute, any new text that is displayed has the attribute. For example, after you set the bold attribute any new text that is displayed is bold.

To turn all attributes off and display plain text on a black background, use a zero for the parameter as in the following example:

```
ESC[0m
```

You can set as many attributes as you like with a single **m** command. For example, the following command sets text to be blinking (5), and red (31) with a blue background (44):

```
ESC[5;31;44m
```

The order in which you type the parameters is not important. However, each parameter must be separated from the others with a semicolon.

There are three kinds of attributes you can give text: form, color, and background. The form attributes specify whether the text will be bold, underlined, blinking, or hidden. The color attributes specify which color the text will be. The background attributes specify the color behind the text. If you specify an attribute that your system doesn't support, MS-DOS ignores your request and no change occurs on the screen.

Changing the Kind of Text

The following form attributes control the kind of text displayed:

1 Bold text

2 Non-bold text

4 Underlined text

5 Blinking text

8 Hidden text

The underline attribute functions only with monochrome monitors. The hidden text attribute tells the monitor to move the cursor as text is displayed but not to actually display the text.

For example, the following ANSI commands display the word *WARNING* in bold, blinking letters at the current cursor position:

```
ESC[1;5mWARNING
ESC[0m
```


lindas • Thu May 17 11:24:06 1990 • MICROSOFT CONFIDENTIAL

The second **m** command resets all attributes so that future text is not displayed bold and blinking.

The following **prompt** command makes the greater-than sign in your command prompt bold:

```
prompt $p$e[1m$g$e[0m
```

Before the **$g**, bold is turned on, and after the **$g**, bold is turned off.

Changing the Color of Text

The following attributes specify the color of text:

30 Black text

31 Red text

32 Green text

33 Yellow text

34 Blue text

35 Magenta text

36 Cyan text

37 White text

For example, the following command displays the word *WARNING* in red, bold, blinking letters:

```
esc[31;1;5mWARNING
esc[0m
```

As before, the **0m** command resets the attributes when the text has been displayed.

The following **prompt** command makes the drive and directory in your command prompt bold blue and the greater-than sign bold red:

```
prompt $e[1;34m$p$e[31m$g$e[0m
```

Before the **$p**, bold and blue are turned on, before the **$g**, red is turned on, and after the **$g** all the attributes are reset.

Changing the Background of Text

The following attributes control background color:

lindas • Thu May 17 11:24:06 1990 • MICROSOFT CONFIDENTIAL

40 Black text

41 Red text

42 Green text

43 Yellow text

44 Blue text

45 Magenta text

46 Cyan text

47 White text

7 Reverse video text

For example, the following command displays the word *WARNING* in red, bold, blinking letters on a yellow background:

```
ESC[43;31;1;5mWARNING
ESC[Øm
```

Reverse video text has a white background. When you set this attribute, the text background changes to white. The color of the text remains the same unless it was white (in which case it changes to black).

NOTE The color and background parameters meet the ISO 6429 standard.

lindas • Thu May 17 11:24:06 1990 • MICROSOFT CONFIDENTIAL

lindas • Thu May 17 11:24:06 1990 • MICROSOFT CONFIDENTIAL

Chapter 13

Optimizing Your System

Optimizing is customizing your system so that it uses its resources most efficiently for the tasks you usually perform. Typically, optimizing involves improving one or more aspects of your system's performance, but sometimes sacrificing something else. For example, you might improve your system's speed, but have less memory for applications as a result.

In the MS-DOS environment, optimizing your system usually means balancing speed against memory. Typically, you have one of two goals:

- To improve your system's speed as much as possible, while still retaining enough memory to run the applications you need.

  You might want to improve your system's speed if there is sufficient memory to run the applications you need, but you want those applications to run faster.

- To free as much memory as possible for applications, even if doing so slows down your system a bit.

  You might want to free up memory, even at the cost of some speed, if there is not enough memory available to run certain applications.

This chapter briefly describes your system's resources and how they relate to system performance. The chapter then explains the different utilities and procedures you can use to improve speed, or to free up memory for applications.

NOTE If you are using Microsoft Windows version 3.0 or later, you should follow the optimization procedures in the *Microsoft Windows User's Guide* instead of the procedures in this chapter, since Windows manages memory and other system resources very differently from the way MS-DOS does.

t-mark • Thu May 17 09:53:56 1990 • MICROSOFT CONFIDENTIAL

What Are System Resources?

Your system's resources determine its limitations. In the MS-DOS environment, the most important system resources are memory and disk space. The available resources can affect:

- Which applications you can run.
- How fast applications run.
- How much data an application can work with at a time.
- How much data you can store from one session to the next.

The sections that follow explain each resource and how MS-DOS uses it.

Understanding Memory

Memory provides temporary storage for applications and data. It exists on your computer's main system board or on add-in memory boards. All applications must be loaded into memory in order to run.

In general, the more memory you have, the more data you can store in memory at a time. Some applications require more memory than others. You can increase the amount of memory on your system by plugging a memory board into a slot inside the machine. For example, you might add a 2MB memory board to a system that already has 1MB of memory on its main system board; the system would then have a total of 3MB of memory.

Your system may have up to three different kinds of memory:

- Conventional memory
- Extended memory
- Expanded memory

To find out what kind of memory your system has, and how much, use the **mem** command. (See the *Reference* for additional information on **mem**.)

The sections that follow explain each type of memory.

nikiasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Conventional Memory

Conventional memory exists on all 8086, 8088, 80286, 80386, and 80486-based computers. Most computers have at least 256K of conventional memory, and can accommodate up to 640K of conventional memory.

When you start MS-DOS, it uses up some of your computer's conventional memory. Next, MS-DOS starts the device drivers listed in your CONFIG.SYS file and the memory-resident utilities specified in your AUTOEXEC.BAT file. These device drivers and utilities use up additional memory. The memory that is left over is available for running applications.

All applications require some conventional memory.

Extended Memory (XMS)

One way to add more memory to your system is to install *extended memory*. Extended memory is general-purpose memory beyond 640K on 80286, 80386, and 80486 computers. In effect, it is a simple extension of your computer's conventional memory. (Many 80286 and 80386 computers come with 640K of conventional memory and 384K of extended memory, for a total of 1MB of memory.)

Extended memory is fast and efficient for applications to use. However, to take advantage of extended memory, an application must be designed to use it; many applications are not designed to do so. If you do not use applications that can take advantage of extended memory, you might want to use your system's extended memory to run utilities that improve its speed. For example, if you have extended memory, you can speed up your system by using some of that memory for the SMARTDrive utility.

To use extended memory efficiently, you should install a special program called an *extended memory manager*. An extended memory manager "administrates" the use of your system's extended memory, so that several programs do not try to use the same memory at the same time. The extended memory manager also makes it much easier for programs to use extended memory. MS-DOS includes the extended memory manager HIMEM.SYS. (You must install HIMEM.SYS if you want to run MS-DOS in extended memory. See "Running MS-DOS in Extended Memory," later in this chapter, for details.) HIMEM.SYS conforms to the Extended Memory Specification (XMS), which specifies a standard way for programs to use extended memory cooperatively.

Extended memory is the best choice for memory expansion if you are using or plan to use Microsoft Windows 3.0 or later, since Windows works best with extended memory. Another advantage of choosing extended memory is that MS-

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

DOS can run in extended memory, leaving more conventional memory available for applications.

NOTE If your 80386 or 80486 system has extended memory, but you use applications that can take advantage of expanded memory, you may want to install EMM386. EMM386 is an expanded memory emulator; basically, it uses extended memory to provide expanded memory for applications. See the following section for information about expanded memory. For information on EMM386, see "Using the EMM386 Expanded Memory Emulator," later in this chapter.

Expanded Memory (EMS)

Another way to add memory in excess of 640K to your system is to install *expanded memory*. Most personal computers can accommodate expanded memory. Expanded memory exists separately from your system's conventional and extended memory.

To use expanded memory, you must install a special program called an *expanded memory manager*, which comes with the expanded memory board. The expanded memory manager is necessary because, in order to gain access to expanded memory, applications must request it from the expanded memory manager. The expanded memory manager and the expanded memory board conform to the Expanded Memory Specification (EMS), which specifies how programs can make use of expanded memory.

Some applications are unable to use expanded memory because they were not designed to interact with an expanded memory manager. However, because expanded memory was introduced before extended memory, more applications are designed to use expanded than extended memory.

Because an expanded memory manager gives applications access to only a limited amount of expanded memory at a time, expanded memory can be slower and more cumbersome to use than extended memory.

Some expanded memory boards, such as the AST RAMpage! ® AT or Intel Above ™ Board/AT, can be set up with extended memory, with expanded memory, or with both.

Understanding Disk Space

Disks provide long-term and temporary storage for program files and data files. The most common types of disk media are floppy disks and hard disks. Applica-

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

tions and other files are stored on these media magnetically, much as information is stored on a cassette tape.

It's best if there is some disk space left after you have installed all the software and data files you need. There are two reasons you might need free disk space:

- You need disk space to save documents and other data files.
- Some applications use available disk space to store temporary files and data while they're running.

It's often useful to know how much disk space is available on your system, since the amount of free disk space can affect your ability to store files and data. With some applications, the amount of available disk space can even affect how well the application runs.

Use the MS-DOS commands **chkdsk** or **dir** to check the amount of free disk space. See Chapter ??, "What title," for information on how to use these commands.

Improving Your System's Speed

Your system's speed affects how fast applications can perform tasks such as reading and saving files, displaying information on the screen, and so on.

In the MS-DOS environment, there are two ways to improve your system's speed:

- By improving the efficiency of your hard disk.

  The organization of the files on your hard disk can affect how fast your computer runs. This chapter explains several procedures you can perform to improve your hard disk's organization. None of these procedures take up additional memory. For more information about these procedures, see "Improving the Efficiency of Your Hard Disk," later in this chapter.

- By installing one or more utilities that are designed to improve speed.

  Often, the most effective way to speed up your system is to install a utility such as SMARTDrive. MS-DOS comes with several such utilities. These can improve speed dramatically, but they use up some memory. For more information about these utilities, see "Using Speedup Utilities," later in this chapter.

NOTE If your system has additional extended or expanded memory that your applications do not need, you might want to use that memory for utilities that improve your system's speed.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Certain speedup methods work better for some systems than for others. The best way to speed up your system will depend on how much memory your system has. In addition, the type of applications you use can determine which speedup methods work best for you.

Database applications and language compilers use the hard disk differently from the way most applications do. Therefore, the best speedup methods for someone who normally uses database applications or language compilers will differ from the best methods for someone who uses mainly a word processing application.

The following table lists methods for speeding up your system, explains when you would want to use each method, and lists the types of applications that each method speeds up.

Method	When to Use It	What It Speeds Up
Use the **buffers** command.	On most systems.	All applications.
Use the **buffers** command to specify a secondary cache.	If you use applications that a secondary cache can speed up. Do not use in conjunction with SMARTDrive.	Compilers and other applications that read files in small pieces.
Install Fastopen.	If you use databases or compilers.	Databases and compilers.
Install SMARTDrive.	If your system has a hard disk and extended or expanded memory that is not needed by applications. Do not use in conjunction with a secondary cache.	All applications.
Install RAMDrive.	If your system has extended or expanded memory, and you use applications that RAMDrive can speed up.	Applications that use temporary files, or applications that you start often.
Structure the **path** command efficiently.	If your system takes a long time to respond when you type a command.	Starting applications.
Reorganize (compact) your hard disk.	Periodically.	All applications, to some extent. Can particularly improve application startup time.
Adjust your hard disk's interleave.	If you are using SMARTDrive and your hard disk still responds sluggishly	All applications.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Method	When to Use It	What It Speeds Up
Make more space available on your hard disk using the methods described in "Improving the Efficiency of Your Hard Disk" later in this chapter	If your system is low on disk space.	All applications, to some extent.

The following sections explain each method in detail.

Using the Buffers Command

The **buffers** command specifies the number of buffers that MS-DOS reserves for file transfers. (For a detailed explanation, see Chapter 12, "Customizing Your System.")

Basic Recommendations

The higher the number of buffers (up to about 50), the faster your system runs. However, past a certain value, increasing the number of buffers does nothing but use up memory.

When optimizing your system for speed, you would normally want to specify the highest number of buffers that is useful for your system. This number depends on the size of your hard disk. The following table lists the highest efficient buffer sizes for different hard disks:

Hard disk size	Buffer size
Less than 40 MB	20
40 to 79 MB	30
80 to 119 MB	40
More than 120 MB	50

The following command specifies 40 buffers — an optimum number for a system with a 110-MB hard disk:

```
buffers = 40
```

NOTE When calculating the default number of buffers, MS-DOS bases the number of buffers on how much conventional memory your system has, rather than on the size of the

lindas • Thu May 17 12:05:03 1990 • MICROSOFT CONFIDENTIAL

hard disk. The default that MS-DOS calculates is a minimum number of buffers. The numbers in the preceding table are larger in order to increase your system's speed.

Using the Secondary Cache

A secondary cache can be useful when you are not using SMARTDrive. It is more useful for database applications and language compilers than for other applications. The secondary cache can also make it faster to load programs.

You specify a secondary cache as part of the **buffers** command.

Basic Recommendations

- Do not specify a secondary cache if you have installed a disk-caching utility such as SMARTDrive.
- Normally, if you specify a secondary cache, you should set the secondary cache to 8.

The following command specifies 30 buffers and a secondary cache of 8:

```
buffers = 30,8
```

Using Fastopen

The **fastopen** program can speed up access to files and directories. **Fastopen** keeps track in memory of the location of files and directories you open. This makes subsequent access to those files much faster. **Fastopen** is particularly useful if you use applications such as database programs that repeatedly open and close files.

Basic Recommendations

- Use **fastopen** if you use databases or compilers and have some memory to spare.
- Give **fastopen** access to 1 file for every MB of hard disk space. For example, if you have a 40-MB hard disk, you would allow **fastopen** to work with up to 40 files at once.
- Experiment! If you do not notice any improvement in speed with **fastopen**, then the applications you are using probably do not perform the type of disk access that **fastopen** can speed up. In that case, stop using **fastopen** in order to free memory for other uses.

Advantages

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

- Improves speed for programs that repeatedly open and close files, such as database software and language compilers.
- Does not require expanded or extended memory.
- Can use expanded memory.

Disadvantages

- Uses up some conventional memory.
- Cannot use extended memory.
- Does not improve performance of applications that do not repeatedly open and close files. For applications other than database programs and compilers, **buffers** or SMARTDrive might improve speed more effectively than **fastopen**.

There are three ways to use **fastopen**:

- Add **fastopen** to your CONFIG.SYS file using the **install** command. (You must use this method in order to run **fastopen** in expanded memory.)
- Include the **fastopen** command in your AUTOEXEC.BAT file.
- Type the **fastopen** command at the MS-DOS prompt.

To install **fastopen** in your CONFIG.SYS file, you would include a command like the following:

```
install = c:\dos\fastopen.exe c:=40 /x
```

This command runs **fastopen** in expanded memory, and tells it to work with the files on drive C:. It allows **fastopen** to work with as many as 40 files at once — the optimum number for a 40-MB disk drive.

For more details on **fastopen**, see the *Reference*.

Using SMARTDrive

SMARTDrive is a disk-caching program for computers that have a hard disk and extended or expanded memory. Disk-caching programs can reduce the amount of time your computer spends reading data from your hard disk. (If you use Windows version 3.0 or later, SMARTDrive can provide a significant increase in speed without taking memory away from Windows. This is because SMARTDrive, unlike other disk-caching programs, cooperates with Windows to provide the most effective use of your system's memory.)

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

SMARTDrive saves information read from your hard disk in your computer's expanded or extended memory. This area of memory is SMARTDrive's *cache*. When an application tries to read that information from the hard disk, SMARTDrive supplies the information directly from its cache in memory instead. SMARTDrive always copies new or modified information to the hard disk, so there is no danger of losing information when you turn off your computer.

You install SMARTDrive by adding the SMARTDrive command line to your CONFIG.SYS file.

Basic Recommendations

Because the optimum settings for SMARTDrive depend on the applications you run and your system configuration, there is no single "best setting" for SMARTDrive. After installing SMARTDrive, you might want to experiment to find the optimum settings for your system.

The following are basic recommendations you can start with:

- You should use SMARTDrive if your system has a hard disk and at least 512K of extended memory or 256K of expanded memory. Many applications run much faster with SMARTDrive.
- If your system has extended memory, tell SMARTDrive to use extended memory.
- If your system has expanded memory, tell SMARTDrive to use expanded memory by adding the /A switch to the SMARTDrive command line.
- If your system has both extended and expanded memory, tell SMARTDrive to use whichever type of memory is more abundant on your system.
- To start with, give SMARTDrive as large a cache as possible, up to 2MB. (The larger the cache, the more memory SMARTDrive uses.) If an application won't run because there is not enough expanded or extended memory left over, gradually reduce the size of the cache until the application is able to run properly. "Specifying the Size of the SMARTDrive Cache," later in this chapter, explains more about figuring out the optimum size for SMARTDrive's cache.
- If possible, compact your hard disk regularly. SMARTDrive runs best if the files on your hard disk are not fragmented.

Advantages

- Improves speed on all systems that have expanded or extended memory.
- Fairly easy to adjust.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Disadvantages

- Uses up some conventional memory.
- Requires either extended or expanded memory.

NOTE Do not use SMARTDrive in conjunction with other disk-caching programs. In addition, Windows/386 ™ version 2.x will not run with SMARTDrive version 3.0.

Installing SMARTDrive

When you install MS-DOS, Install copies the SMARTDRV.SYS file to your MS-DOS directory. To install SMARTDrive, you add a **device** command for SMARTDrive to your CONFIG.SYS file. (This section refers to that **device** command as *the SMARTDrive command line.*)

The SMARTDrive command lines tells MS-DOS:

- Where to find the SMARTDRV.SYS file
- The size of SMARTDrive's memory cache
- Whether SMARTDrive should use extended or expanded memory (optional). By default, SMARTDrive uses extended memory.

The following is a typical SMARTDrive command line:

```
device = c:\dos\smartdrv.sys 1024
```

This command tells MS-DOS that SMARTDRV.SYS is in the \DOS directory on drive C. It runs SMARTDrive in extended memory, since SMARTDrive runs in extended memory by default. It specifies a cache size of 1024K (1 MB).

IMPORTANT In order for SMARTDrive to run, your CONFIG.SYS file must contain a command line for the appropriate memory manager.

If you want SMARTDrive to use extended memory, your CONFIG.SYS file must contain a command line for HIMEM.SYS. The SMARTDRV.SYS command line must come after the HIMEM.SYS command line.

If you want SMARTDrive to use expanded memory, your CONFIG.SYS file must contain a command line for the expanded memory manager that came with your memory board. The SMARTDRV.SYS command line must come after the command line for your expanded memory manager.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

For additional information about setting up and optimizing SMARTDrive on your system, see the following sections.

Specifying the Size of the SMARTDrive Cache

The size of SMARTDrive's disk cache affects SMARTDrive's efficiency. In general, the larger the cache, the less often SMARTDrive needs to read data from the disk. The most efficient size for the cache size is around 2 MB; increasing the cache over 2 MB will probably not provide faster performance than a 2-MB cache.

The SMARTDrive cache size is the first numeric parameter on the SMARTDrive command line.

NOTE The SMARTDrive command line also has an optional second numeric parameter which limits how much Windows can reduce the cache size. This parameter matters only if you use Windows version 3.0 or later. For additional information, see the *Microsoft Windows User's Guide*.

The following SMARTDrive command line tells SMARTDrive to create a 1024K cache in extended memory:

```
device = c:\dos\smartdrv.sys 1024
```

When creating its cache, SMARTDrive rounds the specified cache size down to the nearest multiple of the largest disk track size. In other words, the actual size of the SMARTDrive cache depends on how many disk tracks will fit in the cache. When you start SMARTDrive, it determines how many disk tracks can fit in the amount of memory you specified for the cache. Thereafter, SMARTDrive will cache no more than that number of disk tracks at a time. For example, if the track size on your hard disk is 10K and you have set up a 256K cache, then 25 tracks will fit in the cache. SMARTDrive will then cache no more than 25 tracks at a time, and will create a cache that uses 250K, not 256K, of memory. In general, SMARTDrive runs most efficiently with disks that have small tracks.

NOTE On most systems, the SMARTDrive driver uses about 15K or more of conventional memory in order to run. The amount depends on the track size of your hard disk(s) and the size of the cache you specify.

Basic Recommendations

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Because the optimum cache size for SMARTDrive depends on how you use your system, there is no single "best setting." You should experiment to find the best cache size for your system.

The following are basic recommendations you can start with:

- Set the cache size to between 256K and 2048K. (Set it as large as possible within that range.)
- Setting the cache size to less than 256K is not a good idea, since SMARTDrive will probably not be able to cache enough information to be effective.
- Setting the cache size to larger than 2048K might not be the best use of your system's memory. Although, in general, a larger cache is faster, you get less return on your memory investment as the cache size increases above 2048K. For example, increasing a 256K cache to 512K might improve your system's speed by 20 percent. However, increasing a 2048K cache the same amount, from 2048K to 2304K, might improve speed by only 2 percent.

Putting the SMARTDrive Cache in Extended or Expanded Memory

SMARTDrive can use either extended or expanded memory for its disk cache. By default, it uses extended memory. To tell SMARTDrive to put its cache in expanded memory instead, add the /A switch to the end of the SMARTDrive command line.

Basic Recommendation

- You should give SMARTDrive extended memory unless your system has only expanded memory. In that case, tell SMARTDrive to put its cache in expanded memory.

Putting the Cache in Extended Memory

If your computer has extended memory, you'll probably want to put SMARTDrive's cache in extended memory, and give it as much memory as possible (up to about 2MB). (This is particularly effective if you use Microsoft Windows version 3.0 or later, since Windows can shrink SMARTDrive's cache to release memory for its own use. Windows and SMARTDrive then cooperate to provide both effective disk caching and efficient memory management.)

NOTE To run SMARTDrive in extended memory, the SMARTDrive command line must appear in your CONFIG.SYS file after the HIMEM command line.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

The following command lines install HIMEM.SYS and SMARTDrive, and give SMARTDrive extended memory:

```
device = c:\dos\himem.sys
device = c:\dos\smartdrv.sys  1024
```

This command line tells MS-DOS to look for the SMARTDRV.SYS file in the directory C:\DOS. It gives SMARTDrive 1024K (1MB) of extended memory, so the cache size is 1024K.

Putting the Cache in Expanded Memory

If your computer has expanded memory and you can spare some for SMARTDrive, you'll want to put SMARTDrive's cache in expanded memory. (If you use applications that need expanded memory, be sure to leave enough expanded memory for those applications.)

NOTE To use expanded memory, SMARTDrive's command line must appear in your CONFIG.SYS file after the command line that starts your system's expanded memory manager.

The following command line puts the SMARTDrive cache in expanded memory:

```
device = c:\dos500\smartdrv.sys  2048   /a
```

This command line tells MS-DOS to look for the SMARTDRV.SYS file in the \DOS500 directory on drive C. It gives SMARTDrive 2048K (2MB) of expanded memory, so the cache size is 2048K.

NOTE It is not a good idea to put the cache in expanded memory provided by EMM386.EXE. EMM386 uses extended memory to emulate expanded memory that applications can then use. Although SMARTDrive can also use this emulated expanded memory, it might not speed up your system as much as if you gave it real physical memory.

Using RAMDrive

RAMDrive is a memory-resident utility that lets you use part of your system's memory to emulate a very fast, temporary disk drive. This memory area is called a *RAM disk* because it exists in memory (RAM). RAM disks are much faster than hard disks because your computer can read information faster from memory than from a physical disk. A RAM disk appears to be a normal disk drive; you can use it just as you would any disk drive. One important difference between a real disk drive and a RAM disk is that, since it exists only in memory, information on a RAM disk is lost when you turn off or reset your computer.

Basic Recommendations

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

- Install RAMDrive only if you really need a RAM disk. In many cases, using the same amount of memory for SMARTDrive will improve your system's speed more than RAMDrive would.
- If your system has plenty of memory but does not have a hard disk drive, you should install RAMDrive and give as much memory as possible.
- If you often run applications that use many small temporary files, RAMDrive might improve your system's speed more than SMARTDrive. In that case, install RAMDrive and set your TEMP environment variable to the RAM disk. For additional information, see "Using the TEMP Environment Variable with RAMDrive" later in this chapter.
- List your RAM disk first in your **path** command.

Advantages

- Provides you with a very fast disk drive.
- Provides additional disk space for temporary storage. This can be extremely useful on a system without a hard disk.
- Fairly easy to set up.

Disadvantages

- Uses additional memory, which can cut down your system's speed and capacity.
- When you turn off your computer, it does not save information that is stored on the RAM disk. Because of this, the RAM disk is best for storing temporary files or copies of application files, not for saving data files that may change.
- Whenever you restart your computer, the RAM disk is re-created. This means you must recopy information (except temporary files) to your RAM disk each time you start your computer.

WARNING Do not use the RAM disk to store data files. Whenever you turn off or reboot your computer, all information on the RAM disk is erased. This means that, in the case of a system crash or a power outage, you could lose any data files stored on the RAM disk.

Installing RAMDrive

When you install MS-DOS, Install puts a copy of the RAMDRIVE.SYS file in your MS-DOS directory.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

To set up RAMDrive, add a **device** command for RAMDRIVE.SYS to your CONFIG.SYS file. The RAMDrive command line tells MS-DOS:

- Where to find the RAMDRIVE.SYS file.
- How much memory to allocate to RAMDrive.
- Whether RAMDrive should use conventional, expanded, or extended memory.

The following is a typical RAMDrive command line:

```
device = c:\dos\ramdrive.sys 512 /e
```

This command line tells MS-DOS that RAMDRIVE.SYS is in the \DOS directory on drive C. The command line gives RAMDrive 512K of extended memory; it uses the /e switch to tell RAMDrive to use extended memory.

IMPORTANT In order for RAMDrive to use your system's extended or expanded memory, your CONFIG.SYS file must contain a command line for the appropriate memory manager.

If you want RAMDrive to use extended memory, your CONFIG.SYS file must contain a command line for HIMEM.SYS. The RAMDRIVE.SYS command line must come after the HIMEM.SYS command line.

If you want RAMDrive to use expanded memory, your CONFIG.SYS file must contain a command line for the expanded memory manager that came with your memory board. The RAMDRIVE.SYS command line must come after the command line for your expanded memory manager.

The following command line tells RAMDrive to run in expanded memory, and gives RAMDrive the maximum amount (4096K) of expanded memory that RAMDrive can use:

```
device = c:\dos\ramdrive.sys 4096  /a
```

The command line tells MS-DOS to look for the RAMDRIVE.SYS file in the \DOS directory on drive C.

NOTE It is not a good idea to put the RAM disk in expanded memory provided by EMM386.EXE. EMM386 uses extended memory to emulate expanded memory that applications can then use. Although RAMDrive can also use this emulated expanded memory, it will not be as efficient as if you gave it real physical memory.

Running Applications from Your RAM Disk

If you start certain applications frequently, you might want to run those applications from your RAM disk rather than from a physical disk. Starting an application

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

from a RAM disk can be up to 3 times faster than starting the same application from a physical disk. It can be particularly useful if you normally start applications from a floppy disk.

▶ **To run an application from your RAM disk:**

1. Install RAMDrive as described in the preceding section.

   The drive letter of your RAM disk should be the letter after that of your last physical drive. For example, if your last disk drive is named C:, your RAM disk would be D:. If you have three hard disk drives named C:, D:, and E:, your RAM disk would be F:.

2. Copy the application's executable file(s) to the RAM disk.
3. Start the application from the RAM disk as you would from any disk drive. (Depending on the application, you might need to first make the RAM disk your current disk drive.)

You will need to recopy the application to the RAM disk each time you reboot your computer, since the RAM disk is created anew whenever you reboot. If you use the application frequently, you might want to add a **copy** command to your AUTOEXEC.BAT file. For example, to copy Microsoft Excel to a RAM disk named F: whenever you restart your computer, you would add a command like the following to your AUTOEXEC.BAT file:

```
copy c:\excel\excel.exe f:\
```

Using the TEMP Environment Variable with RAMDrive

Many applications use temporary files to store data while they're running. Some of these applications store temporary files in the directory specified by the TEMP environment variable. For information about how your applications store temporary files, consult the applications' documentation.

You set the TEMP variable using the **set**command. (Typically, the **set** command is in your AUTOEXEC.BAT file.) For example, the following command line sets the TEMP variable to the C:\TEMPFILES directory:

```
set temp = c:\tempfiles
```

Setting the TEMP variable affects only those applications that check for the value of TEMP. The location you specify for temporary files can affect the speed of applications that use the TEMP variable. For example, if the TEMP variable specifies a relatively slow hard disk, applications that store temporary files on that drive might run at less than optimum speed.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Basic Recommendations

- Set the TEMP variable to your RAM disk.

  Because it's much faster to read information from memory than from a hard disk, an application that uses temporary files will usually run faster if it stores its temporary files on a RAM disk. Since most applications delete their temporary files when they're finished using them, you don't need to worry about saving copies of those files before turning off your computer.

- Set the TEMP variable to a subdirectory, not to the root directory.

  MS-DOS allows you to create only a limited number of files in the root directory of a disk, but lets you create as many files as you need within a subdirectory.

- Make sure that the disk to which you set the TEMP variable has enough free space for the temporary files your application creates. Consult the application's documentation for more information about how the application uses temporary files.

Using the HIMEM Extended Memory Manager

HIMEM is an extended memory manager—a utility that "administrates" the use of your system's extended memory so that no two applications can use the same memory at the same time.

Advantages

- Makes extended memory available to applications that use extended memory according to XMS (the Extended Memory Specification).
- Prevents system errors that can result from applications making conflicting memory requests.
- Lets you run DOS in extended memory to conserve conventional memory.
- Compatible with Windows version 3.0 or later.

Disadvantages

- Uses up a small amount of conventional memory.
- Might not be compatible with some software.

Basic Recommendations

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

- You should install HIMEM if you have an 80286, 80386, or 80486 computer with extended memory.

NOTE Windows/386 ™ version 2.x will not run in conjunction with HIMEM version 3.0.

You install HIMEM by adding the HIMEM command line to your CONFIG.SYS file. The HIMEM command line must come before any command lines for applications or device drivers that use extended memory.

The HIMEM command line tells your computer where to find the HIMEM program file, controls how HIMEM manages memory, and specifies your system type.

The following command line runs HIMEM using the default values:

```
device = c:\dos\himem.sys
```

The command line tells MS-DOS to look for the HIMEM.SYS file in the directory C:\DOS. Because this command line does not include additional switches, HIMEM uses the default values for those switches. (for information on HIMEM's additional switches, see the *MS-DOS 5.0 User's Reference*.)

Installing the EMM386 Expanded Memory Emulator

An *expanded memory emulator* is a utility that uses extended memory to simulate expanded memory. Applications can then use that simulated expanded memory just as if it were physical expanded memory. MS-DOS includes the expanded memory emulator EMM386.EXE (for use on 80386 and 80486 systems only). (When you install MS-DOS, Install copies the EMM386.EXE file to your MS-DOS directory.) You should use EMM386.EXE only if necessary.

You might want to install EMM386.EXE if you use applications that require expanded memory, but your 80386 or 80486 system includes only extended memory.

NOTE If you use Microsoft Windows 3.0 or later, you may not need to use EMM386 even if you run applications that need expanded memory. When running in 386 enhanced mode, Windows can simulate expanded memory for applications that need it. See the *Windows User's Guide* for more information.

EMM386.EXE is for use on 80386 and 80486 systems only. To use an application that requires expanded memory on an 80286 or 8086 computer, you need to configure your system so that it provides as much physical expanded memory as the

t-mark • Thu May 17 14:43:46 1990 • MICROSOFT CONFIDENTIAL

application needs. For more information on expanded memory, see "Understanding Memory" earlier in this chapter.

Basic Recommendations

- Install EMM386 only if your system has only extended memory, but you want to use applications that require expanded memory.
- If you install EMM386, allocate it only as much memory as the application needs.

  For example, if you want to run an application that requires 256K of expanded memory, you would allocate 256K of memory to EMM386.

Advantages

- Simulates expanded memory on systems that have only extended memory.
- Can improve the speed of applications that run faster with expanded memory.

Disadvantages

- Works only on 80386 and 80486 systems.
- Uses up some extended memory.

To install EMM386.EXE, add a command line for EMM386.EXE to your CONFIG.SYS file.

The EMM386 command line tells MS-DOS where to find the EMM386.EXE file and how much extended memory to allocate to EMM386. EMM386 will then provide that amount of expanded memory to applications that need it.

The following is a typical EMM386 command line:

```
device = c:\dos\emm386.sys 640
```

It allocates 640K of memory for use as expanded memory, and tells MS-DOS that EMM386.EXE is in the \DOS directory on drive C.

The EMM386.EXE command line must come after the command line that starts HIMEM.SYS, but before any command lines for programs that use expanded memory.

NOTE When you install EMM386, you should disable or remove any other command lines for expanded memory management software.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

For details on the EMM386 command line, see the *MS-DOS 5.0 User's Reference.*

Improving the Efficiency of Your Hard Disk

This section explains how to perform procedures that can improve your system's speed without using additional memory. As explained earlier in "Understanding Disk Space," the amount of free disk space can affect your system's performance and storage capacity. In addition, your system will run faster if the information on your disk is structured as efficiently as possible.

The following methods can improve your hard disk's efficiency without taking up additional memory:

- Delete files you don't need.

  If your disk is getting full, you should delete files you don't need or use often. Depending on how you use MS-DOS, you might want to delete certain MS-DOS files to free disk space. For more information, see the following section, "Deleting Unnecessary Files."

- Run the **chkdsk /f** command to recover lost disk space, then delete the files **chkdsk** creates.

  Running **chkdsk /f** can recover lost allocation units that are taking up space on your hard disk. For more information, see "Using the Chkdsk Command," later in this chapter.

- Make sure MS-DOS is searching for files in the most efficient order.

  When you type a command, start a program, and so on, MS-DOS must first find the file you are requesting. This search process can take some time. There are several ways to speed up the sesarch process. For more information, see "Helping MS-DOS Find Files Faster," later in this chapter.

- Reorganize the files on your hard disk.

  The order in which files are stored on your hard disk can dramatically affect the time it takes to find and read those files. Running a disk-compaction utility reorganizes the file structure on your hard disk, so that all the free disk blocks are together. This can greatly improve your system's speed. For more information, see "Reorganizing Your Hard Disk to Improve Speed," later in this chapter.

- Adjust your hard disk controller's interleave.

  A disk's *interleave* affects how many times the disk must revolve in order for an entire disk track to be read. An improperly interleaved hard disk can be slow and inefficient. For more information, see "Adjusting Your Hard Disk's Interleave," later in this chapter.

t-mark • Thu May 17 14:43:46 1990 • MICROSOFT CONFIDENTIAL

The following sections explain each method.

Deleting Unnecessary Files

As explained in "Understanding Disk Space" earlier in this chapter, disk space can be a valuable system resource. It allows you to store files and applications when you're not using them. In addition, with programs that perform virtual memory management, such as Microsoft Windows 3.0 or later, free disk space can provide not only storage for files; it can provide additional capacity for running applications and storing data in memory.

If you need more disk space, an easy solution is to delete some unnecessary files. There are three categories of files you might want to delete:

- Application files, documents, or utilities that you no longer need or use.
- Temporary files that were left on your hard disk when an application terminated unexpectedly.
- MS-DOS files that were installed automatically by Install, but which you do not need or plan to use. See the list later in this section for details.

CAUTION Do not delete any MS-DOS files other than the ones listed later in this section.

Basic Recommendations

- It is particularly important to delete unnecessary files before compacting a hard disk.
- In general, keep as much disk space free as possible.

To delete unnecessary files, use the **del** command. The following are some hints for deleting files:

- Delete any temporary files that were left behind by applications.

  Many applications create temporary files while they are running. Some applications store those files in a separate directory in the directory that applications use to store temporary files. (If you have a TEMP directory, it is specified in your AUTOEXEC.BAT file using the **set** command.)

  You should periodically clean out your TEMP directory. (This is not necessary if your TEMP directory is on a RAM disk.) To avoid deleting a temporary file that is currently in use, you should delete files in your TEMP directory only when you are not running any applications.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

- If your system is very short on disk space, you might want to delete some MS-DOS files in order to conserve disk space.

  If you plan to delete MS-DOS files, you should first use the MS-DOS Install program to install MS-DOS on a set of floppy disks. This will make it easy for you to restore individual files later.

  The following list provides more information on the MS-DOS files you can delete.

CAUTION Never delete the files COMMAND.COM, IO.SYS or MSDOS.SYS. If you delete these files, your system will not start.

You can delete the following MS-DOS files if you do not plan to use them:

Filename(s)	Description	When to Delete
EMM386.EXE	Expanded memory emulator.	If your system is not an 80386 or 80486, or if you do not use applications that require expanded memory.
RAMDRIVE.SYS	RAMDrive memory-disk utility	If you do not need a RAM disk, or if your system has only conventional memory.
SMARTDRV.SYS	SMARTDrive disk-caching utility	If your system does not have a hard disk, or if your system has only conventional memory.
NLSFUNC,, GRAFTABL.COM, KEYB.CON, *.CPI, COUNTRY.SYS, DISPLAY.SYS, KEYBOARD.SYS, PRINTER.SYS	Files that provide international support and code page support	If you are in the U.S. and do not need international (foreign language) support.
MOUSE.COM	Mouse driver	If you do not have a mouse installed on your system.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Filename(s)	Description	When to Delete
EXE2BIN, LINK	Programming tools	If you do not plan to do any programming.

Using the Chkdsk Command

The **chkdsk** command can recover lost file clusters that are taking up space on your hard disk. (A cluster is the smallest piece of your hard disk that can be allocated to a file.) Clusters can get "lost" when an application terminates unexpectedly, leaving temporary files on the hard disk without saving or deleting them properly. Over time, lost clusters can accumulate and take up disk space.

When you run **chkdsk** with the **/f** option, it finds and recovers any lost allocation units. **Chkdsk /f** converts the lost units to visible files that you can examine and delete.

CAUTION Always exit all applications and memory-resident software before running **chkdsk** with the /F option; never run **chkdsk /f** from within an application. Loss of data might result.

Basic Recommendations

- Run **chkdsk /f** occasionally to make sure there are no lost file clusters on your disk.
- Run **chkdsk /f** before compacting your disk.
- You also might want to run **chkdsk /f** after an application terminates unexpectedly.
- Make sure you exit all applications before running **chkdsk**. If you use **fastopen** or SMARTDrive, disable those commands in your CONFIG.SYS file and restart your computer to ensure that those utilities do not interfere with the disk-compaction process.

▶ To clean up lost files using chkdsk:

1. Exit from all applications.
2. Change to the hard disk you want to clean up. For example, to clean up files on your drive D, you would type **d:** at the DOS prompt.
3. Type the command **chkdsk /f**.

   The **/f** option tells **chkdsk** to fix any lost file clusters it finds.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

4. If **chkdsk** finds any lost clusters, it asks if you want to convert the lost clusters to files. If you want to inspect the contents of the lost clusters before deleting them, type *y* for Yes. (If you are sure the lost clusters do not contain information you want, type *n* for No. **Chkdsk** will then simply delete the information; you can then skip the remaining steps in this procedure.)

   If you answer *y*, **chkdsk** converts any lost file clusters to visible files with filenames similar to FILE0001.CHK. It puts the files it finds in the disk's root directory. **Chkdsk** also displays information about the disk it just checked.

5. Use the **type** command to examine the .CHK files. For example, to examine the file FILE0001.CHK, you would type **type file0001.chk**. (For information on the **type** command, see Chapter XX.

   Sometimes, a .CHK file might contain information you want to keep. For example, if a word processing application terminated before you saved your edits, you might find your lost edits in a recovered .CHK file.

6. Delete any .CHK files you don't want.

Helping MS-DOS Find Files Quickly

When you type a command, start a program, and so on, MS-DOS must first find the file you want before it can execute the command or program. If you type the full pathname of the file, MS-DOS can find and execute the file almost immediately. If you type only the filename, MS-DOS searches for the file as follows:

1. First, MS-DOS looks for the file in your current directory.
2. MS-DOS then looks for the file in each of the directories specified by your **path** command.

   The **path** command determines which directories MS-DOS searches Typically, the **path** command is included in your AUTOEXEC.BAT file. Your **path** command also determines the order in which MS-DOS searches for files.

This searching can take time, particularly if your path contains many directories, or if there are many files in those directories. The fewer directories and files MS-DOS has to search through before finding the executable file, the faster the response will be.

For example, if you type **word** at the MS-DOS prompt, MS-DOS looks for a file named WORD.EXE, WORD.COM, or WORD.BAT. It first looks in your current directory. If it doesn't find the file there, MS-DOS then looks in the first directory listed in your path. MS-DOS continues searching through each directory on your path until it either finds the file or until there are no more directories to search.

Basic Recommendations

t-mark • Thu May 17 14:43:46 1990 • MICROSOFT CONFIDENTIAL

- If your disk has one or two directories that contain frequently-used executable files, you might want to list those directories first in your **path** command. For example, suppose all your MS-DOS batch (.BAT) files are in the directory C:\BELFRY, and the programs you use most frequently are in the directory C:\PROGRAMS. An efficient **path** command might look like the following:

```
path = c:\belfry;c:\programs;c:\dos;c:\;c:\util
```

- When typing the name of a program or batch file, you can speed up MS-DOS' search for that file by including the full pathname of the file. MS-DOS then looks only in that directory.
- Keep the number of files and directories on your hard disk to 150 or less. This can reduce the time MS-DOS spends searching.

Reorganizing Your Hard Disk to Improve Speed

Over time, as applications read from and write to your hard disk, information on your disk can become *fragmented*. Fragmentation occurs when a file, instead of being stored in contiguous sectors of the disk, is broken into fragments that are stored in different locations on the disk. Although fragmentation doesn't affect the validity of the information—your files are still complete when you read them into an application—it takes much longer to read them from the disk. It also takes longer for applications to write files back to the disk.

In addition to file fragmentation, disk speed can be affected by the order in which files are stored. For example, programs and other files that will not change should be stored in the early part of the disk to enhance performance and reduce future fragmentation.

There are two ways to improve the organization of your hard disk:

- Run a disk-compaction utility.

  Disk-compaction utilities reorganize the information on your disk so that all the information in each file is stored as close together as possible. This makes reading from and writing to your hard disk much more efficient.

- Back up, reformat, and restore your hard disk.

  Reformatting your hard disk "wipes it clean." You can then restore your files in the most efficient order. The process of backing up, reformatting, and restoring your hard disk can be very time-consuming.

The following sections explain how to use disk-compaction utilities and how to back up, reformat and restore your hard disk.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

3. Run the **chkdsk** command with the **/f** option.

   Never run **chkdsk /f** from within an application. The previous section explains how to run **chkdsk /f**.

4. Ensure that you are not running any programs that use the hard disk.
5. Run the **backup** utility according to the instructions in Chapter ??, "??".
6. After your files are completely backed up, run **restore** to reformat your hard disk. See Chapter ??, "??," for more information.
7. Use the **backup** utility to restore your saved files onto the newly formatted hard disk.

Adjusting Your Hard Disk's Interleave

A hard disk's *interleave* determines how many times the disk must revolve in order for an entire disk track to be read.

The optimum interleave for each hard disk depends on the type of hard disk and controller. The interleave is particularly important if you are using SMARTDrive. An improper interleave can reduce your disk's speed by as much as 200 or 300 percent.

You can purchase a utility that checks and adjusts your hard disk's interleave. (For information on using such a utility, see that utility's documentation.)

Basic Recommendation

- It is a good idea to adjust your hard disk's interleave so that it is optimum for your disk type and controller.

Advantages

- An optimum interleave can drastically improve your system's speed, particularly if you are using SMARTDrive.
- Does not take up memory or disk space.
- Needs to be done only once (although you might want to experiment to find the best interleave for your system).

Disadvantages

- MS-DOS does not include a utility for adjusting the interleave of your hard disk. You can purchase such a utility from your computer store.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

1. Delete any unnecessary files from that disk using the steps outlined in "Deleting Unnecessary Files" earlier in this chapter.
2. Exit from all applications and memory-resident software.

   If you use **fastopen** or SMARTDrive, disable those commands in your CONFIG.SYS file and restart your computer to ensure that those utilities do not interfere with the disk-compaction process.
3. Run the **chkdsk** command with the **/f** option.

   Never run **chkdsk /f** from within an application. The previous section explains how to run **chkdsk /f**.
4. Run your disk-compaction utility according to the manufacturer's instructions.

Reducing File Fragmentation by Reformatting Your Disk

If you do not own a disk-compaction utility and you suspect that the files on your hard disk are badly fragmented, you might want to compact your hard disk by reformatting it. Doing so involves backing up the files on your hard disk, reformatting it, and restoring the files to the reformatted disk.

Basic Recommendation

- Reformat your hard disk to reduce file fragmentation only if you suspect the information on the disk is badly fragmented. Unlike running a disk-compaction utility, this process is too time-consuming to do frequently.

Advantages

- Makes it faster to read and write files on the hard disk. This, in turn, speeds up your system's performance.
- Can significantly speed up the time it takes for applications to start up.
- Does not require purchase of an additional utility.

Disadvantages

- Can take several hours to complete.

▶ To reorganize your hard disk by reformatting it:

1. Delete any unnecessary files from that disk using the steps outlined in "Deleting Unnecessary Files" earlier in this chapter.
2. Exit from all applications.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

- Some disk-interleaving utilities require that you reformat your hard disk; however, a few utilities are capable of safely resetting the interleave without affecting the data on the hard disk.

Freeing Up Memory

If you are having trouble running applications you need because there is not enough memory available, then your main goal should be not to improve speed, but to free up memory for the applications.

Of course, in order to run an application, your system must contain as much physical memory as that application requires. For example, if an application requires 512K of memory, it is not going to run on a system that has only 256K of memory, no matter how much memory you free up.

However, if your system does contain sufficient memory, but the application still won't run, then you need to free some memory for use by that application.

In most cases, an application fails to run because of insufficient conventional memory. However, some applications require additional expanded or extended memory.

The following sections explain how to make more memory available to applications.

Freeing Up Conventional Memory

All applications require conventional memory in order to run. You can make more conventional memory available to applications by minimizing how much memory MS-DOS, installable device drivers, and other memory-resident programs use. Applications can use only the conventional memory that is available when you start them. If memory-resident software is already using memory, then the application cannot use that memory.

There are several ways to free up conventional memory for use by applications:

- If your system has extended memory, you can tell MS-DOS to run in extended memory (HMA) instead of conventional memory. Because few applications use the HMA, loading MS-DOS into the HMA gets it "out of the way" of other applications.
- You can "streamline" your CONFIG.SYS and AUTOEXEC.BAT files so that they do not start unnecessary memory-resident software.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

The following sections explain how to load MS-DOS into the HMA, and how to "streamline" your CONFIG.SYS and AUTOEXEC.BAT files so that they start only programs that you really need.

Running MS-DOS in Extended Memory

Normally, when you start MS-DOS, it loads its routines into your system's conventional memory. This takes up some memory, making that memory unavailable to applications. However, if your system has extended memory, MS-DOS can load its routines into extended memory. MS-DOS uses a part of your system's extended memory called the *high memory area* (HMA), which is the first 64K of extended memory. Because few applications use the HMA, it makes sense to use that memory area for running MS-DOS.

To tell MS-DOS to load its routines into extended memory, include the following command lines in your CONFIG.SYS file:

```
device = himem.sys
dos = high
```

These command lines first load the HIMEM extended memory manager, then tell MS-DOS to load its routines into extended memory. The HIMEM memory manager is required in order to run MS-DOS in extended memory.

Streamlining Your CONFIG.SYS and AUTOEXEC.BAT Files

When you start your computer, the settings in your CONFIG.SYS and AUTOEXEC.BAT files can start device drivers, utilities, and other programs that use memory. You can make more memory available to applications by removing unnecessary commands and utilities from these files.

Basic Recommendation

- Avoid starting unnecessary memory-resident software from your CONFIG.SYS and AUTOEXEC.BAT files.

To effectively streamline your CONFIG.SYS and AUTOEXEC.BAT files, you should know the function of each of the command lines in those files. Because the information in these files can determine how your computer starts and runs, you should not change these files unless you know what effect your changes may have.

CAUTION Use care when changing your CONFIG.SYS and AUTOEXEC.BAT files. If you incorrectly change or disable some values, your system may not function properly. Therefore, it is important to make a bootable floppy disk that contains a backup copy of these files.

---

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

▶ To streamline your CONFIG.SYS and AUTOEXEC.BAT files:

1. Make a bootable floppy disk that includes a backup copy of both your CONFIG.SYS file and your AUTOEXEC.BAT file. For more information, see "???."
2. Use a text editor such as Edit to open and edit your CONFIG.SYS and AUTOEXEC.BAT files.
3. Disable any command lines for unnecessary device drivers and utilities.

   When streamlining your CONFIG.SYS and AUTOEXEC.BAT files, it is better to simply disable command lines than to delete them. That way, if you accidentally disable a command line you really need, you can restore it easily. To disable a command line, insert the command **rem** (for "remark") at the beginning of the line. For example, to disable the following CONFIG.SYS command line:

   ```
   device = c:\device\mouse.sys
   ```

   you would use the **rem** command as follows:

   ```
   rem device = c:\device\mouse.sys
   ```

4. Save the file.
5. When you have finished editing both files, restart your computer by pressing CTRL+ALT+DEL.

   If your system does not start properly, insert the bootable floppy disk you created in step 1 in drive A, and start your computer again. If you know which command line(s) are causing the problem, edit the appropriate file (CONFIG.SYS or AUTOEXEC.BAT) on your hard disk, and restart your computer. Or, to start over, copy the backup version of the file from the floppy disk to your hard disk.

Your CONFIG.SYS File

As explained in Chapter 12, "Customizing Your System," your CONFIG.SYS file is a text file that defines device drivers and specifies your MS-DOS configuration. For example, a typical CONFIG.SYS file might specify the location of the MS-DOS file COMMAND.COM, define an extended memory manager, and specify how many files an application can have open at once. MS-DOS runs the command lines in your CONFIG.SYS file before those in your AUTOEXEC.BAT file.

Basic Recommendations

- Disable command lines for any unnecessary device drivers using the method explained in the preceding section.

t-mark • Thu May 17 14:43:46 1990 • MICROSOFT CONFIDENTIAL

Your CONFIG.SYS file should define only device drivers that you really need. (Device drivers are defined using the **device** command.)

If your CONFIG.SYS file contains a **device** command for SMARTDrive, RAMDrive, or **fastopen**, you might want to disable that command line to conserve memory. (SMARTDrive, in particular, can use up a lot of conventional memory.)

- If your system has expanded memory, your CONFIG.SYS file should contain a **device** command for the expanded memory manager that came with your memory board.
- If your system has extended memory, your CONFIG.SYS file should contain a **device** command for the HIMEM.SYS expanded memory manager.
- If your system has extended memory, your CONFIG.SYS file should include the following command:

```
DOS = high
```

  This command saves conventional memory by running MS-DOS in extended memory. (The command must come after the **device** command that installs the HIMEM expanded memory manager.)
- If your CONFIG.SYS file contains a **buffers** command, try reducing the number of buffers. (Note that some applications might not run properly if you reduce the number too far.)
- Add a **stacks** command to limit the number and size of interrupt stacks that MS-DOS uses. You can conserve memory by setting **stacks** to **0,0**, as follows:

```
stacks = 0,0
```

- If your CONFIG.SYS file includes the **lastdrive** command, you can save some memory by setting **lastdrive** to a letter such as *j* or *k*, rather than to *z*. (If you use a network, this may limit the number of network disk drives you can use simultaneously.)
- If your CONFIG.SYS file contains an **fcbs** command, try setting **fcbs** to a low value. If you do not use a network, you can set **fcbs** to 1.

Your AUTOEXEC.BAT File

As explained in Chapter 12, "Customizing Your System," your AUTOEXEC.BAT file is a special MS-DOS batch file. Like any batch file, it lists MS-DOS commands; when you run the batch file, MS-DOS executes the commands in the file. Unlike other batch files, MS-DOS automatically executes the commands in your AUTOEXEC.BAT file immediately after it completes the commands in your CONFIG.SYS file. (Your AUTOEXEC.BAT file is located in the root directory of your first hard disk, which is usually drive C.)

t-mark • Thu May 17 14:43:46 1990 • MICROSOFT CONFIDENTIAL

Typically, an AUTOEXEC.BAT file starts memory-resident utilities such as a network and sets up environment variables that are used later by applications. In addition, your AUTOEXEC.BAT file might set your DOS prompt or start pop-up programs such as Borland's SideKick.

Basic Recommendations

- Disable command lines that start pop-up programs or other memory-resident software that you do not need.
- If you use a mouse only with Windows and Windows applications, you might want to disable any command lines that start and enable mouse-driver software such as MOUSE.COM. (Windows has a built-in mouse driver.)

Freeing Up Extended Memory

A few applications require additional extended memory in order to run. If you are having trouble running such an application, check the following:

- Make sure your system contains as much physical extended memory as the application needs.
- Make sure your CONFIG.SYS file contains a command line for the HIMEM.SYS extended memory manager. Some applications need HIMEM.SYS in order to use extended memory.
- If your CONFIG.SYS file contains a command line for SMARTDrive or RAMDrive, ensure that those programs are not using up all of your extended memory. You can reduce the amount of extended memory you are giving to SMARTDrive or RAMDrive; or, you can simply disable those command lines by using the **rem** command.
- Make sure your CONFIG.SYS and AUTOEXEC.BAT files do not start unnecessary programs that use extended memory. See "Streamlining Your CONFIG.SYS File and AUTOEXEC.BAT File," earlier in this chapter, for details.
- If the application will not start, and displays a message such as "High Memory Area (HMA) already in use," then you need to free up the high memory area for that application.

  Few applications require use of the high memory area. If your application requires the high memory area and your CONFIG.SYS file contains the command **dos = high**, you might want to disable that command. Doing so will cause MS-DOS to run in conventional memory rather than in the high memory area of extended memory.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Freeing Up Expanded Memory

Some applications require additional expanded memory in order to run. If you are having trouble running such an application, check the following:

- Make sure your system contains as much physical expanded memory as the application needs.

  If you have an 80386 system with extended memory, you can use EMM386.EXE to provide expanded memory for applications. For details, see "Installing the EMM386 Expanded Memory Emulator" earlier in this chapter.
- Make sure your CONFIG.SYS file contains a command line for the expanded memory manager that came with your memory board. This command line is required in order for applications to use expanded memory.
- If your CONFIG.SYS file contains a command line for SMARTDrive or RAMDrive, ensure that those programs are not using up all of your expanded memory. You can reduce the amount of expanded memory you are giving to SMARTDrive or RAMDrive; or, you can simply disable those command lines by using the **rem** command.
- Make sure your CONFIG.SYS and AUTOEXEC.BAT files do not start unnecessary programs that use expanded memory. See "Streamlining Your CONFIG.SYS File and AUTOEXEC.BAT File," earlier in this chapter, for details.
- If you are using EMM386.EXE, you can make more expanded memory available to applications by giving EMM386 more extended memory. EMM386 can then use the additional extended memory to provide more expanded memory for applications.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

nikiasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Chapter 14

Customizing for International Use

14

This chapter describes the procedures you use to change the national language that MS-DOS uses. When MS-DOS was installed, the proper commands may already have been added to your CONFIG.SYS and AUTOEXEC.BAT files to convert your system to a language other than United States English.

MS-DOS 5.0 can use the language conventions, keyboards, and character set for the following countries/languages:

Belgium	Canadian-French
Denmark	France
Germany	Italy
Latin America	Netherlands
Norway	Portugal
Swiss-French	Swiss-German
Spain	Finland
Sweden	United Kingdom
United States	

Understanding Languages

MS-DOS assumes that you want to use United States English unless you tell it otherwise. There are three changes you can make to change the language that MS-DOS uses:

- You can change MS-DOS to use a country's language conventions for displaying dates, times, currency, character sort order, and valid filename characters.
- You can change the characters and arrangement of your keyboard to fit the standard keyboard of a country.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

- You can change the character set that MS-DOS uses so that you can type, display and print characters from different languages.

To change the conventions of MS-DOS, you put a **country** command in your CONFIG.SYS file. When you type the **country** command, you specify a three-digit *country code* that tells MS-DOS which conventions you want to use. MS-DOS retrieves the appropriate conventions from the COUNTRY.SYS information file.

To change the kind of keyboard that MS-DOS assumes you are using, you include a **keyb** command in your CONFIG.SYS or AUTOEXEC.BAT file, or enter the command at the command prompt. When you type the **keyb** command you specify a two-letter *keyboard code* that tells MS-DOS which type of keyboard you want to use. When you run the **keyb** command, MS-DOS retrieves a table from the KEYBOARD.SYS information file that tells it which character to assign to each key. For example, if you choose the US keyboard, MS-DOS assigns the exclamation mark character(!) to the SHIFT+2 key. If you choose the Italian keyboard, MS-DOS assigns the quotation mark character (") to SHIFT+2.

At any time, MS-DOS has a set of 256 different characters it can assign to a key. The set of 256 characters is called a *code page*. Unless you tell it otherwise, MS-DOS uses the code pages that come with your computer. These code pages are called *hardware code pages*. Your computer has a hardware code page for the console (the keyboard and display) and your printer may also have a hardware code page.

If all of the characters you need are in your hardware code pages, you can change languages by using the **country** and **keyb** commands. If you want to use a language with characters that are not included in your hardware code page, you must use a *prepared code page*. Prepared code pages are alternative sets of 256 characters that are stored in code page information (.CPI) files.

Not all devices can use prepared code pages. For example, monochrome and CGA screens, as well as many printers, can use only their own built-in hardware code page.

MS-DOS 5.0 comes with five prepared code pages. All code pages, including hardware code pages, contain the same standard ASCII, scientific, and graphics characters. Code pages differ in the special language characters they contain. The most common code page is named "347". This is the standard code page for US English. It also contains most of the characters used by most European languages.

If your computer's hardware code page is 347, you will be able to use most European languages, although you may not be able to type certain characters unless you change to a prepared code page.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

If no prepared code pages have yet been added to your system, you can find out which hardware code page you have by entering the following **chcp** command:

```
chcp
```

To use a prepared code page instead of your hardware code page you must perform three tasks:

- You must include a **device** command in your CONFIG.SYS file to install a new device driver for the device with which you want to use the code page. For example, to use a prepared code page with your display and keyboard, you must install the DISPLAY.SYS device driver.
- You must load the code page you want to use and an additional support program into your computer's Random Access Memory (RAM). You load the code page with a special form of the **mode** command. You load the support program with an **nlsfunc** command.
- You must make the prepared code page active by selecting it with the **chcp** command or the **mode** command.

With the proper commands, you can use more than one prepared code page. While you are working, you can switch between your hardware code page and any prepared code pages you have loaded.

When you use commands to set up your system for a national language, MS-DOS checks to make sure the screen, printer, and keyboard codes you request work together. If the codes you use are incompatible, MS-DOS displays an error message.

The following table shows the country codes, keyboard codes and code pages that you can use together:

Country or Language	Country Code	Keyboard Code	Valid Code
Belgium	032	be	437 and 850
Canadian-French	002	cf	863 and 850
Denmark	045	df	865 and 850
France	033	fr	437 and 850
Germany	049	gr	437 and 850
Italy	039	it	437 and 850
Latin America	003	la	437 and 850
Netherlands	031	nl	437 and 850
Norway	047	no	865 and 850

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Country or Language	Country Code	Keyboard Code	Valid Code
Portugal	351	po	860 and 850
Swiss-French	041	sf	437 and 850
Swiss-German	041	sg	437 and 850
Spain	034	sp	437 and 850
Finland	358	su	437 and 850
Sweden	046	sv	437 and 850
United Kingdom	044	uk	437 and 850
United States	001	us	437 and 850

Changing Conventions and Keyboards

To change the language MS-DOS uses you must always change the language conventions and the arrangement of the keyboard. To change MS-DOS's language conventions, you include a **country** command in your CONFIG.SYS file. To change the arrangement of the keyboard, you enter a **keyb** command. You can use the **country** and **keyb** commands whether or not you load any code pages.

Changing Date and Time Formats With the Country Command

In Brief

To set MS-DOS's language conventions, include a **country** command in your CONFIG.SYS file. For example, if your COUNTRY.SYS file is in the C:\DOS directory, the following command sets MS-DOS to the language conventions of Finland (358):

```
country=358,,c:\dos\country.sys
```

Notice that there are two commas between the country and the location of COUNTRY.SYS.

Unless you tell it otherwise, MS-DOS assumes that you want to use United States language conventions for the following items:

- The way the date and time are displayed.
- The symbol that is used for currency (for example, The German mark, the Italian lira, the Danish krone)

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

- The sort order MS-DOS should use when alphabetizing files or listings.
- The list of characters that can be used in file and directory names.

To change the language conventions that MS-DOS uses, you include a **country** command in your CONFIG.SYS file. When you type the **country** command you specify which country's conventions you want MS-DOS to use. The conventions for each country are stored in the COUNTRY.SYS file. When you change conventions, MS-DOS uses the information in the COUNTRY.SYS file rather than the US conventions.

When you type a **country** command, you must include a three digit *country code* to specify which conventions you want to use. For example, the country code for Spain is 034. For a complete list of country codes, see the table in the previous section.

MS-DOS assumes that your COUNTRY.SYS file is located in the root directory of your startup disk. If COUNTRY.SYS is not in the root directory of your startup disk, you need to type its pathname in the **country** command.

For example, suppose you want to use the language conventions of Italy (country code 039). If your COUNTRY.SYS file is in the root directory of your startup disk, you need only type the following simple command:

```
country=039
```

If your COUNTRY.SYS file is in the C:\DOS directory, you type the following command:

```
country=039,,c:\dos\country.sys
```

In this form of the command there must always be two commas (,) between the country code and the location of COUNTRY.SYS. In general, this is the most complicated command you have to type to change language conventions.

If you want to tell the **country** command that you will be using a different code page, you can include the code page number in the command. For example, to tell the **country** command that you will be using code page 850, you type the following **country** command:

```
country=039,850,c:\dos\country.sys
```

If you specify a code page in the **country** command, you can still switch to a different code page later.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Changing Keyboards with the Keyb Command

In Brief

To change the characters on your keyboard and their arrangement, use the **keyb** command. For example, if the KEYBOARD.SYS file is in the C:\DOS directory, the following command changes to the characters and arrangement of a Swedish keyboard (sv):

```
keyb sv,,c:\dos\keyboard.sys
```

Notice that there are two commas (,) between the country and the location of KEYBOARD.SYS.

When you change from US English to another language, you add characters to your keyboard and rearrange its keys. For example, to change MS-DOS from US English to Latin American Spanish you add four characters to your keyboard (one letter and three symbols). To make room for the extra characters, many of the characters on the keyboard must be rearranged.

To rearrange the keyboard and add new characters, you use the **keyb** command. The **keyb** command works with PC1, PC XT, PC AT, and IBM PC-convertible keyboards.

There are three ways to run the **keyb** command:

- You can include a **keyb** command in your AUTOEXEC.BAT file so that it runs automatically when you start your computer.
- You can enter the **keyb** command at the command prompt.
- You can use an **install** command in your CONFIG.SYS file to run the command when MS-DOS reads the CONFIG.SYS file.

Regardless of how you run the initial **keyb** command, you can always change keyboards by entering a **keyb** command at the system prompt.

If you change keyboards, you can switch back to a US keyboard by pressing CTRL+ALT+F1. To return to the keyboard you were using, press CTRL+ALT+F2.

Entering Keyb Commands

When you enter the **keyb** command at the system prompt or type it in a batch file, you include a two-letter keyboard code to specify which keyboard you want to use. MS-DOS looks in the KEYBOARD.SYS file to find out how to rearrange your keyboard for the country you chose.

MS-DOS assumes that your KEYBOARD.SYS file is located in the root directory of your startup disk. If KEYBOARD.SYS is not in the root directory of your startup disk, you need to type its pathname in the **keyb** command.

For example, suppose you want to use an Italian keyboard (keyboard code IT). If your KEYBOARD.SYS file is in the root directory of your startup disk, you need only type the following simple command

```
keyb it
```

If your KEYBOARD.SYS file is in the C:\DOS directory, you type the following command:

```
keyb it,,c:\dos\country.sys
```

In this form of the command there must always be two commas (,) between the country code and the location of COUNTRY.SYS. In general, this is the most complicated command you will have to type to change the keyboard.

If you want to change the default code page for the keyboard, you can include the code page number in the command. For example, to tell the **keyb** command to assume that you will use code page 850, you would type the following **country** command:

```
keyb it,850,c:\dos\country.sys
```

If you specify a code page in the **keyb** command, you can still switch to a different code page later.

You can achieve exactly the same result by entering the **keyb** command without a code page and then changing the current code page to 850. For information about changing code pages, see xx later in this chapter.

Running Keyb from Your CONFIG.SYS File

Rather than having a **keyb** command in your AUTOEXEC.BAT file or entering a keyb at the command prompt, you can include an **install** command in your CONFIG.SYS file that runs the **keyb** command. To run the **keyb** command from the CONFIG.SYS file you use the same parameters as from the command line. For example, to change to an Italian keyboard from the CONFIG.SYS file, you include the following command:

```
install=keyb.com it,,c:\dos\country.sys
```

This command has the same result as if you had entered the **keyb** command at the system prompt.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Using Different Keyboards

The following diagrams show the characters and keyboard arrangements for most of the Enhanced PC keyboards MS-DOS can use.

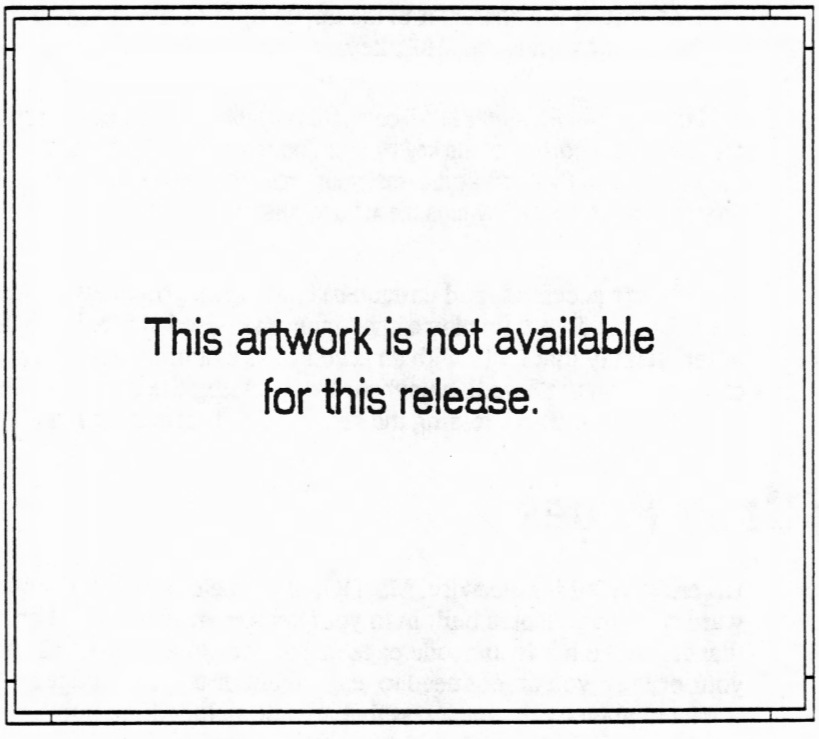

ciu_1

Most keys have at least two characters assigned to them. Some keys have three or four characters assigned to them. If there are three or four characters assigned to a key, the additional characters are shown on the key to the right of the usual characters. o type the different characters, you press the key in combination with one or more other keys:

- To produce the character in the lower-left of the key, you press the key.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

- To produce the character in the upper-left of the key, you press the key plus the SHIFT key.
- To produce the character in the lower-right of the key, you press the key plus the ALT-GR key (just to the right of the SPACE key)
- To produce the character in the upper-right of the key, you press the key plus the ALT key, plus the SHIFT key.

NOTE For IBM PC and IBM AT-compatible keyboards, you can produce the character in the lower right portion of the key by pressing the key plus CTRL+ALT. (On Danish, Finnish, Norwegian, and Swedish keyboards, your press the key plus ALT. On French-Canadian keyboards, you press the key plus the ALT and SHIFT keys.)

To produce accented (and umlauted) characters, you press *dead keys*. Dead keys are keys that do not display a character when used alone, but when followed by a letter, display that letter with an accent. For example, you can produce umlauted characters on the Swedish keyboard by pressing the key to the left of the BACKSPACE key and then pressing the key for the character you want to umlaut.

Using Code Pages

Unless you tell it otherwise, MS-DOS uses the character set contained in the hardware code page that is built in to your computer. If you need only the characters that are in the hardware code page of your console (keyboard and display) and your printer, you do not need to learn about or use code pages. However, if you use a language with characters that are not included in your hardware code pages, you need to follow the directions in this section to understand how to install and use prepared code pages.

NOTE Monochrome and CGA displays and many printers cannot use prepared code pages.

MS-DOS has five *prepared code pages* that you can use in addition to or instead of the hardware code pages that are built into your devices. Each prepared code page has the same set of standard ASCII characters, graphics characters, and scientific characters. However, each code page has a different set of national language characters. For example, the Portuguese code page has the same ASCII, graphics, and scientific characters as the other code pages but also includes the characters particular to Portuguese.

These are the five MS-DOS prepared code pages:

t-mark • Thu May 17 13:35:13 1990 • MICROSOFT CONFIDENTIAL

- 850 — Multilingual code page. This code page has all the characters for all the languages that MS-DOS can use.
- 437 — United States code page. This code page contains the characters for English and most other European languages.
- 860 — Portuguese code page. This code page contains the characters for English and Portuguese.
- 863 — Canadian-French code page. This code page contains the characters for English and French-Canadian.
- 865 — Nordic code page. This code page includes all characters for English, Norwegian, and Danish.

Tables of the characters contained in each prepared code page are given in xx.

The prepared code pages are stored in code-page information (.CPI) files. Before you use a code page, you load it into RAM. There may be more than one code page in RAM, but only one code page is *active*. If you do not install a prepared code page, your hardware code page is active. If you install one or more prepared code pages, you can switch between the hardware code pages and any of the prepared code pages you have installed.

In general, MS-DOS uses the same code page for the screen and keyboard. However it is possible to assign different code pages to your keyboard and your screen.

Preparing Your Console for Code Pages

In Brief

To prepare your keyboard and screen to use one or more prepared code pages, include a **device=display.sys** command in your CONFIG.SYS file. For example, the following command installs DISPLAY.SYS for an EGA or VGA screen with a 437 hardware code page:

```
device=display.sys con:(ega,437,1)
```

The command reserves space for one prepared code page which will be loaded with a separate command.

Every console has a hardware code page that determines which characters can be typed and displayed. If you only need the code page that your console already uses, then there is no need to install any additional code pages for it. If you want to use characters that are not contained in your hardware code page, you must in-

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

clude a **device** command in your CONFIG.SYS file to reserve space for one or more extra code pages.

MS-DOS has an installable device driver called DISPLAY.SYS that allows you to use prepared code pages with an EGA, VGA or LCD display. Monochrome and CGA screens can use only their own hardware code page (usually 437). If you have an EGA, or VGA display, you can use up to two prepared code pages. If you have an LCD display, you can use only one prepared code page. For more information about installable device drivers, see **xx**.

If DISPLAY.SYS is in the C:\DOS directory, to install it you include the following **device** command in your CONFIG.SYS file:

```
c:\dos\display.sys con=
```

With this command, you specify the following parameters:

- The kind of display adapter you have. You can choose from EGA and LCD. You can use EGA for both EGA and VGA display adapters. If you omit this parameter, MS-DOS checks your hardware to find out what kind of display adapter you have.
- The hardware code page your console uses. You must specify the name of the hardware code page if you want to be able to make it active again after you have switched to a different code page. The most common value for this parameter is 437, the US code page. To find out which hardware code page your screen has, enter a **chcp** command with no parameters before you have added any code pages to your system.
- The number of prepared code pages you want to use. For VGA or EGA, this number can be 1 or 2. For LCD it can be 1. If you don't specify a number, MS-DOS assumes 0.
- The number of sub-fonts that are supported for each code page. If you leave this number out, MS-DOS assumes 0.

For example, if the DISPLAY.SYS file is in the C:\DOS directory, and your VGA display has a 437 hardware code page, to use one extra code page, you include the following command in your CONFIG.SYS file:

```
device=c:\dos\display.sys con=(ega,437,1)
```

All the parameters are grouped together inside parentheses and separated by commas. EGA is the type of display adapter you have. Notice that you type EGA even though you have a VGA adapter.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

437 is the hardware code page of your display. Because you specified a hardware code page, you will later be able to return to the hardware code page after switching to a prepared code page.

The 1 is the number of prepared code pages that you want to use. You don't specify which prepared code page you want because this command does not load the code page. It simply reserves space for the code page.

If you want to use a prepared code page and you don't need to return to the hardware code page, you can omit the hardware code page number from your **device** command as in the following example:

```
device=c:\dos\display.sys con=(ega,,1)
```

Preparing Your Printer for Code Pages

In Brief

If you have a supported printer, you can prepare it to use one or more prepared code pages by including a **device=printer.sys** command in your CONFIG.SYS file. For example, the following command installs PRINTER.SYS for an IBM 5202 Quietwriter printer with a 437 hardware code page attached to the LPT1 port:

```
device=printer.sys lpt1:(5202,437,1)
```

The command reserves space for one prepared code page, which will be loaded with a separate command.

MS-DOS has an installable device driver called PRINTER.SYS that allows you to use prepared code pages with certain types of printers. If you have any of the following printers attached to LPT1 (PRN), LPT2, or LPT3, you can use an MS-DOS prepared code page to change its character set:

- The 4201 code page works with the IBM Proprinter Model 4201 (including the XL) or compatibles.
- The 4208 code page works with the IBM Proprinter Model 4207 or 4208 and the IBM Proprinter X24 or XL24 or compatibles.
- The 5202 code page works with the IBM Quietwriter III Printer Model 5202 or compatible.

Many programs have their own installable device drivers that supersede MS-DOS's driver. See your printer documentation for information about changing its code page. For more information about installable device drivers, see xx.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

If DISPLAY.SYS is in the C:\DOS directory and your printer is attached to LPT1, you include the following **device** command in your CONFIG.SYS file to install the printer driver:

```
c:\dos\printer.sys lpt1=
```

When you type the command, you specify the following parameters

- The kind of printer you have. You can choose from 4201, 4208,or 5202 for the printers that MS-DOS supports.
- The hardware code page your printer uses. You must specify the name of the hardware code page if you want to be able to make it active again after you have switched to a different code page. The most common value for this parameter is 437, the US code page. To find out which hardware code page your printer has, see your printer's documentation.
- The number of prepared code pages you want to use. The maximum number of prepared code pages depends on which printer you have.

For example, if the PRINTER.SYS file is in the C:\DOS directory, your 4102 printer has the US hardware code page (437), and you want to use one extra code page, you include the following command in your CONFIG.SYS file:

```
device=c:\dos\printer.sys con=(4102,437,1)
```

All of the parameters are grouped together inside parentheses and separated by commas. 4102 is the type of printer you have (IBM Proprinter Model 4201 or compatible). 437 is the hardware code page of your printer. Because you specified a hardware code page, you will later be able to return to the hardware code page after switching to a prepared code page.

The 1 is the number of prepared code pages that you want to use. You don't specify which prepared code page you want because this command does not load the code page, it simply reserves space for the code page.

If you don't know which hardware code page your printer has, or if you want to use a prepared code page and you don't need to return to the hardware code page, you can omit the hardware code page from your **device** command, as in the following example:

```
device=c:\dos\printer.sys con=(4102,,1)
```


niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Preparing MS-DOS for Code Pages

In Brief

Before MS-DOS can recognize and change between prepared code pages, you must load the Nlsfunc program into RAM with the following command:

```
nlsfunc
```

The **nlsfunc** (National Language Support function) command loads a program into RAM. The Nlsfunc program helps MS-DOS load and switch between prepared code pages. Nlsfunc also allows MS-DOS to get information from your COUNTRY.SYS file.

Before you use any prepared code pages, you must load the Nlsfunc program into RAM with the following command:

```
nlsfunc
```

The **nlsfunc** command should precede any commands in your AUTOEXEC.BAT file that load or switch code pages.

You can also load the Nlsfunc program from your CONFIG.SYS file. For example, if the nlsfunc command is in the C:\DOS directory, you can load it with the following **install** command:

```
install=c:\dos\nlsfunc.exe
```

Loading Code Pages

In Brief

To load a code page into RAM, use the **mode cp prep** command with the word CON or the name of the port your printer is attached to. For example, the following command loads code page 850 from the file C:\DOS\EGA.CPI for your EGA or VGA display:

```
mode con cp prep=((850)c:\dos\ega.cpi)
```

This command loads code page 850 from the file C:\DOS\4201.CPI for an IBM 4201 Proprinter attached to LPT1:

```
mode lpt1 cp prep=((850)c:\dos\4201.cpi)
```

The **device** commands you include in your CONFIG.SYS file install the device drivers that let you use prepared code pages, but they do not load the code pages. To load prepared code pages, you use a **mode code page prepare** command (**code**

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

page prepare can be abbreviated **cp prep**). The **mode** command extracts the code page you want from the .CPI file where it is stored and loads it into RAM.

Once the code page is in RAM, you can make it the active code page, display information about it, or reload it using other forms of the **mode** command.

When you enter a **mode cp prep** command you specify the following parameters:

- The device for which you want to load the code page. CON loads the code page for the screen and keyboard. PRN, LPT1, LPT2, or LPT3 load the code page for a printer port.
- The prepared code page or code pages that you want to load. You can load as many code pages as you reserved space for in the **device** command you previously included in your CONFIG.SYS file.
- The file in which the code page is stored. All code page files have a .CPI extension. The EGA/VGA code pages are stored in EGA.CPI, the LCD code pages are stored in LCD.CPI and the printer code pages are stored in 4102.CPI, 4208.CPI and 5202.CPI.

For example, the following command extracts code page 850 from C:\DOS\EGA.CPI and loads it into RAM:

```
mode con cp prep=((850)c:\dos\ega.cpi)
```

The name of the device always precedes CP PREP. All of the other parameters are grouped together in parentheses. In addition, the code pages you want to load are grouped together in a second set of parentheses within the first set.

NOTE Before you can use the **mode cp prep** command, you must use the **nlsfunc** command. See the previous section for more information.

If you reserved space for more than one code page when you included a device command in your CONFIG.SYS file, you can load more than one code page. For example, the following command loads code pages 850 and 865:

```
mode con cp prep=((850 865)c:\dos\ega.cpi)
```

Notice that the two code pages are separated by a space.

To install code pages for the screen and printer, you use two separate commands. For example, the following two commands load code page 865 for the screen and 5202 printer attached to lpt1:

```
mode con cp prep=((865)c:\dos\ega.cpi)
mode lpt1 cp prep=((865)c:\dos\5202.cpi)
```


niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Changing Code Pages

In Brief

To change the code page for all of your devices, use the **chcp** command as in the following example:

```
chcp 850
```

To change the code page for a single device, use the **mode cp select** command. For example, the following command makes code page 850 active for the Screen and keyboard:

```
mode con cp select=850
```

After you have installed the proper device driver, loaded the Nlsfunc program, and loaded the code page you want to use for a device into RAM, you can use the code page by making it active. To make a code page active for all devices you use the **chcp** command. To make it active for a single device, you the **mode cp select** command.

You cannot change to a prepared code page if a device uses only a hardware code page or if the code page has not been loaded for the device. In addition, you cannot change the code page used with the keyboard if it does not match the keyboard's country. For example, the Danish keyboard (DF) can only be used with code pages 850 and 865. Thus, you cannot change the code page of a Danish keyboard to 437.

Using the Chcp Command to Change Code Pages

Using the **chcp** command, you can make a code page active for every device that can use it. For example, the following command makes code page 850 active for every device:

```
chcp 850
```

If the code page has not been loaded for one or more of your devices MS-DOS will display the following message:

```
Code page 850 not prepared for all devices
```

MS-DOS makes code page active for the devices for which you have loaded the code page. If a device cannot use the code page, it will retain its original code page. For example, if you try to make a code page active that has not been loaded for your printer, MS-DOS will make the code page active for you console but not your printer.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

Using the Mode Command to Change Code Pages

To change the code page for a single device, you use a **mode cp select** command. Along with the command you specify the name of the device you want to change and the code page you want to change to.

For example, to change to code page 850 for the printer attached to LPT1, you use the following command:

```
mode lpt1 cp select=850
```

Before this command can be successful, you must have loaded code page 850 for the printer. If the code page is not loaded, MS-DOS will display a "Code page not prepared" message.

Displaying Code Page Information

In Brief

To display code page information for your console and printer, enter the following **mode** command:

```
mode
```

To display code page information for your console only, enter the following **keyb** command:

```
keyb
```

To display the active code page, enter the following **chcp** command:

```
chcp
```

When you use the **mode**, **keyb**, and **chcp** commands with no parameters, they provide information about the code pages you are using.

You get the most information from the **mode** command. The mode command lists the active code page, hardware code page and any prepared code pages for both the console and LPT1. For example, suppose you have code pages loaded for LPT1 and the console. If you enter the **mode** command with no parameters, you see a display like the following:

```
Status for device LPT1:
----------------------
LPT1: not rerouted
RETRY=NONE
No code page has been selected
Hardware code pages:
 code page 437
```


niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

```
Prepared code pages:
 code page 850


Status for device CON:
----------------------
COLUMNS=80
LINES=25

Active code page for device CON is 850
Hardware code pages:
 code page 437
Prepared code pages:
 code page 850
```

In this case, both LPT1 and the console have a hardware code page of 437. Both devices also have a code page 850 loaded for them, but only the console has 850 as the active code page.

To display information for the console or any LPT port separately,, use a **mode cp** command. For example, the following command displays code page information for the lpt2 port:

```
mode lpt2 cp
```

If you enter the **keyb** command without parameters, MS-DOS displays a message that tells you which code pages are in use with your keyboard and screen. For example, if you are using a German keyboard and code page 850 for your keyboard and screen, and you enter a **keyb** command with no parameters, MS-DOS displays this message:

```
Current keyboard code: GR code page:850
Current CON code page: 850
```

Sample Language Changes

For many language changes, you don't need to change code pages. If you don't have to change code pages, you need only two commands to change languages. If you need to change code pages, the number of commands you must run depends on how many code pages you want to use and whether you want to use them with the console only or with the console and your printer.

If you commonly change languages, it is most convenient to put all of the commands you need in your AUTOEXEC.BAT file. Then, when you start or reset your computer, MS-DOS sets your keyboard, screen, and printer for the language you want. If you set up your languages in your CONFIG.SYS and AUTO-

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

EXEC.BAT files, you can quickly switch between keyboards and code pages when you need them.

Changing Languages Without Changing Code Pages

For many language changes, you need only run a **country** command and a **keyb** command. For example, if your MS-DOS files are in the C:\DOS directory, you run the following two commands to change MS-DOS to Italian language conventions and an Italian keyboard:

```
country=039,,c:\dos\country.sys
keyb it,,c:\dos\keyboard.sys
```

The **country** command must be located in your CONFIG.SYS file. The **keyb** command can be included in your AUTOEXEC.BAT or CONFIG.SYS file, or you can enter it at the command prompt. If you include the previous **keyb** command in your CONFIG.SYS file, it has the following form:

```
install=keyb.com it,,c:\dos\keyboard.sys
```

Using One Prepared Code Page

If the language you want to use requires a prepared code page, you have to add at least two additional commands to your CONFIG.SYS file, and two or more to your AUTOEXEC.BAT file.

For example, suppose your hardware code page is 437, but you want to be able to use code page 850 with an Belgian keyboard and an EGA display. If the MS-DOS files are in C:\DOS, you can use the following commands in your CONFIG.SYS file to change to Belgian language conventions (032) and install the display driver that allows code page switching:

```
country=032,,c:\dos\country.sys
device=c:\dos\display.sys con=(ega,437,1)
```

The **country** command sets MS-DOS to use the Belgian conventions for date, time, currency, character sort order and valid filename characters. The **device** command installs DISPLAY.SYS, tells it that you have an EGA screen with a 437 hardware code page, and reserves space for a prepared code page.

In your AUTOEXEC.BAT file, you include the following commands to load and select code page 850:

```
nlsfunc
mode con cp prep=((850)c:\dos\ega.cpi)
keyb be,,c:\dos\keyboard.sys
chcp 850
```


niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

The **nlsfunc** command loads the Nlsfunc program. The **mode** command loads code page 850 into RAM from the EGA.CPI file. The **keyb** command changes the arrangement of the keyboard to match a Belgian keyboard. The **chcp** command makes code page 850 the active code page.

The following **nlsfunc** and **keyb** commands could have been included in the CONFIG.SYS file rather than in the AUTOEXEC.BAT file:

```
install=c:\dos\nlsfunc.exe
install=c:\dos\keyb.com be,,c:\dos\keyboard.sys
```

While you are working, you can use a US keyboard arrangement temporarily by pressing CTRL+ALT+F1. To return to the Belgian keyboard arrangement press CTRL+ALT+F2.

To return to code page 437, enter this **chcp** command:

```
chcp 437
```

MS-DOS sets the code page for the keyboard and display to 437.

Using Two Prepared Code Pages with Your Console

If you want to use two code pages with your console, you need to load and select more than one code page.

For example, suppose you want to use code pages 865 and 850 with your VGA screen and Danish keyboard. If the hardware code page is 437, and the MS-DOS files are in C:\DOS, you add the following two commands to your CONFIG.SYS file to change to Danish language conventions and install the display driver:

```
country=045,,c:\dos\country.sys device=c:\dos\display.sys
con=(ega,437,2)
```

The **country** command changes to Danish language conventions and the **device** command tells MS-DOS to reserve space for two prepared code pages. Notice that the parameter EGA works also for VGA screens.

To load both code pages and make 865 the active code page, you include the following commands in your AUTOEXEC.BAT file:

```
nlsfunc
mode con code page prepare=((865,850)c:\dos\ega.cpi)
keyb dk,,c:\dos\keyboard.sys
chcp 865
```

The **mode** command loads both prepared code pages into RAM from the EGA.CPI file. The **chcp** command makes code page 865 active before the AUTO-

nikkasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

EXEC.BAT file ends. While you are working, you can use code page 850 by entering the following **chcp** command:

```
chcp 850
```

To change to code page 437, you first have to change the keyboard to a type that can function with code page 437 (the Danish keyboard functions only with pages 865 or 850).

Using Prepared Code Pages with Your Printer

To add the Danish code pages described in the previous section to an IBM 4208 printer, you add another **device** command to your CONFIG.SYS file and another **mode** command to your AUTOEXEC.BAT file.

With the extra **device** command, your CONFIG.SYS file includes these commands:

```
country=045,,c:\dos\country.sys
 device=c:\dos\display.sys con=(ega,437,2)
device=c:\dos\printer.sys lpt1=(4208,437,2)
```

The second **device** command installs PRINTER.SYS and tells it that you have a 4208 printer with a 437 hardware code page. Like the first **device** command, the second command reserves space for 2 prepared code pages.

With the extra mode command, your AUTOEXEC.BAT file includes these commands:

```
nlsfunc
mode con cp prep=((865,850)c:\dos\ega.cpi)
mode con cp prep=((865,850)c:\dos\4208.cpi)
keyb dk,,c:\dos\keyboard.sys
chcp 865
```

The second **mode** command loads code pages 865 and 850 for the 4208 printer from the 4208.CPI file. The **chcp** command makes code page 865 active for both devices.

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL

niklasb • Wed May 16 19:04:44 1990 • MICROSOFT CONFIDENTIAL